


DHCP Configuration in Cisco Packet Tracer Done by Samip Khadka

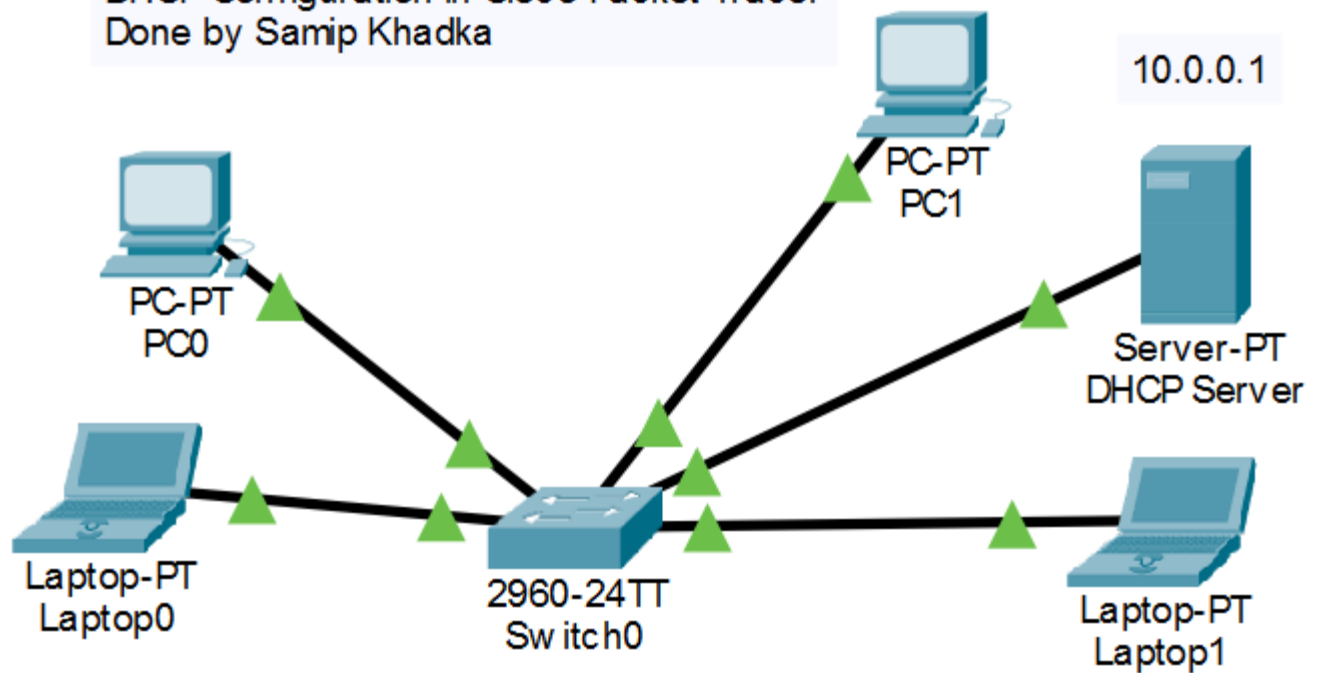

DHCP Server

Physical Config Services **Desktop** Programming Attributes

IP Configuration

IP Configuration

☐ DHCP ☒ Static

IPv4 Address: 10.0.0.1

Subnet Mask: 255.0.0.0

Default Gateway: 0.0.0.0

DNS Server: 0.0.0.0

IPv6 Configuration

☐ Automatic ☒ Static

IPv6 Address: /

Link Local Address: FE80::230:F2FF:FE66:716B

Default Gateway:

DNS Server:

Physical Config **Services** Desktop Programming Attributes**SERVICES**

HTTP

DHCP

DHCPv6

TFTP

DNS

SYSLOG

AAA

NTP

EMAIL

FTP

IoT

VM Management

Radius EAP

PRP

DHCP

Interface **FastEthernet0** Service ☒ On ☐ Off

Pool Name serverPool1

Default Gateway 10.0.0.1

DNS Server 0.0.0.0

Start IP Address : 10 0 0 0

Subnet Mask: 255 0 0 0

Maximum Number of Users : 512

TFTP Server: 0.0.0.0

WLC Address: 0.0.0.0

Add

Save

Remove

Pool Name	Default Gateway	DNS Server	Start IP Address	Subnet Mask	Max User	TFTP Server	WLC Address
serverPool1	10.0.0.1	0.0.0.0	10.0.0.0	255.0.0.0	512	0.0.0.0	0.0.0.0
serverPool	0.0.0.0	0.0.0.0	10.0.0.0	255.0.0.0	512	0.0.0.0	0.0.0.0

Physical Config **Desktop** Programming Attributes

IP Configuration

Interface **FastEthernet0**

IP Configuration

☒ DHCP ☐ Static

IPv4 Address 10.0.0.2

Subnet Mask 255.0.0.0

Default Gateway 0.0.0.0

DNS Server 0.0.0.0

Physical Config **Desktop** Programming Attributes

IP Configuration

Interface **FastEthernet0**

IP Configuration

☒ DHCP ☐ Static

IPv4 Address 10.0.0.5

Subnet Mask 255.0.0.0

Default Gateway 0.0.0.0

DNS Server 0.0.0.0

Laptop0

Physical Config **Desktop** Programming Att

IP Configuration

Interface FastEthernet0

IP Configuration

☒ DHCP ☐ Static

IPv4 Address 10.0.0.3

Subnet Mask 255.0.0.0

Default Gateway 0.0.0.0

DNS Server 0.0.0.0

Laptop1

Physical Config **Desktop** Programming A

IP Configuration

Interface FastEthernet0

IP Configuration

☒ DHCP ☐ Static

IPv4 Address 10.0.0.4

Subnet Mask 255.0.0.0

Default Gateway 0.0.0.0

DNS Server 0.0.0.0

Laptop0

Physical Config **Desktop** Programming Attributes

Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 10.0.0.1

Pinging 10.0.0.1 with 32 bytes of data:

Reply from 10.0.0.1: bytes=32 time<1ms TTL=128
Reply from 10.0.0.1: bytes=32 time<1ms TTL=128
Reply from 10.0.0.1: bytes=32 time<1ms TTL=128
Reply from 10.0.0.1: bytes=32 time=1ms TTL=128

Ping statistics for 10.0.0.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>ping 10.0.0.2

Pinging 10.0.0.2 with 32 bytes of data:

Reply from 10.0.0.2: bytes=32 time=1ms TTL=128
Reply from 10.0.0.2: bytes=32 time=1ms TTL=128
Reply from 10.0.0.2: bytes=32 time<1ms TTL=128
Reply from 10.0.0.2: bytes=32 time=1ms TTL=128

Ping statistics for 10.0.0.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>ping 10.0.0.4

Pinging 10.0.0.4 with 32 bytes of data:

Reply from 10.0.0.4: bytes=32 time<1ms TTL=128
Reply from 10.0.0.4: bytes=32 time<1ms TTL=128
Reply from 10.0.0.4: bytes=32 time<1ms TTL=128
Reply from 10.0.0.4: bytes=32 time=1ms TTL=128

Ping statistics for 10.0.0.4:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms
```