


Basic Static Routing Between Two LANs
Done by Samip Khadka

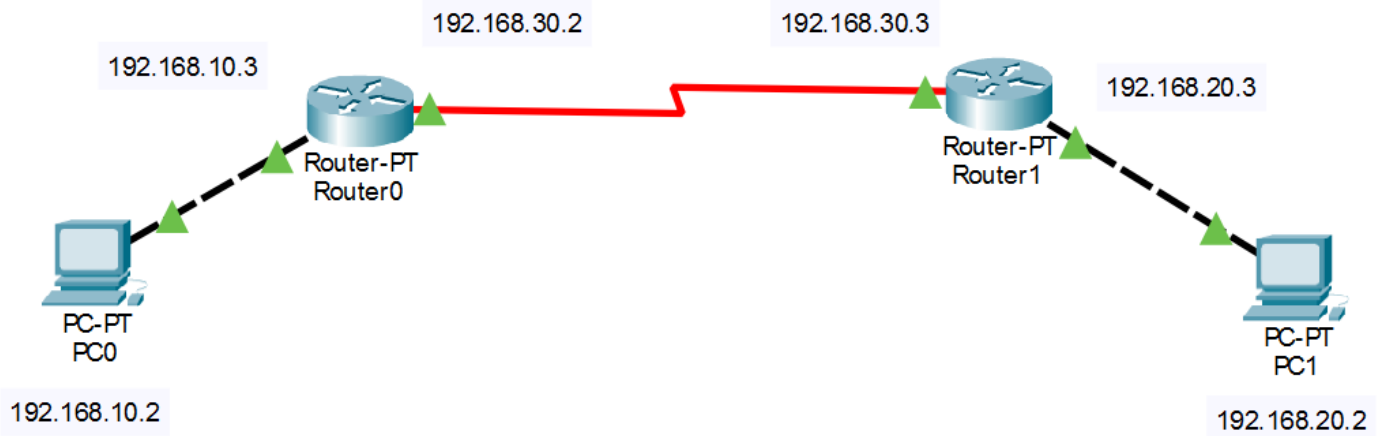

PC0

Physical Config **Desktop** Programming Attributes

IP Configuration

Interface FastEthernet0

IP Configuration

☐ DHCP ☒ Static

IPv4 Address 192.168.10.2

Subnet Mask 255.255.255.0

Default Gateway 192.168.10.3

DNS Server 0.0.0.0

PC1

Physical Config **Desktop** Programming Attributes

IP Configuration

Interface FastEthernet0

IP Configuration

☐ DHCP ☒ Static

IPv4 Address 192.168.20.2

Subnet Mask 255.255.255.0

Default Gateway 192.168.20.3

DNS Server 0.0.0.0

Physical Config CLI Attributes

GLOBAL

Settings

Algorithm Settings

ROUTING

Static

RIP

INTERFACE

FastEthernet0/0

FastEthernet1/0

Serial2/0

Serial3/0

FastEthernet4/0

FastEthernet0/0

Port Status ☒ On

Link Speed ☒ 100 Mbps ☐ 10 Mbps ☒ Auto

Duplex ☐ Half Duplex ☒ Full Duplex ☒ Auto

MAC Address 0030.A327.2BCB

IP Configuration

IPv4 Address 192.168.10.3

Subnet Mask 255.255.255.0

Tx Ring Limit 10

Router0

— □

Physical Config CLI Attributes

GLOBAL

Settings

Algorithm Settings

ROUTING

Static

RIP

INTERFACE

FastEthernet0/0

FastEthernet1/0

Serial2/0

Serial2/0

Port Status ☒ On

Duplex ☒ Full Duplex

Clock Rate 2000000

IP Configuration

IPv4 Address 192.168.30.2

Subnet Mask 255.255.255.0

Tx Ring Limit 10

Router1

— □ ×

Physical Config CLI Attributes

GLOBAL

Settings

Algorithm Settings

ROUTING

Static

RIP

INTERFACE

FastEthernet0/0

FastEthernet1/0

Serial2/0

Serial3/0

FastEthernet4/0

FastEthernet0/0

Port Status ☒ On

Link Speed ☒ 100 Mbps ☐ 10 Mbps ☒ Auto

Duplex ☐ Half Duplex ☒ Full Duplex ☒ Auto

MAC Address 0001.6443.E931

IP Configuration

IPv4 Address 192.168.20.3

Subnet Mask 255.255.255.0

Tx Ring Limit 10

Physical Config CLI Attributes

GLOBAL	Serial2/0
Settings	Port Status ☒ On
Algorithm Settings	Duplex ☒ Full Duplex
ROUTING	Clock Rate 2000000
Static	IP Configuration
RIP	IPv4 Address 192.168.30.3
INTERFACE	Subnet Mask 255.255.255.0
FastEthernet0/0	
FastEthernet1/0	
Serial2/0	Tx Ring Limit 10
Serial3/0	

Physical Config CLI Attributes

GLOBAL	Static Routes
Settings	Network 192.168.20.0
Algorithm Settings	Mask 255.255.255.0
ROUTING	Next Hop 192.168.30.3
Static	
RIP	Add
INTERFACE	
FastEthernet0/0	Network Address
FastEthernet1/0	192.168.20.0/24 via 192.168.30.3
Serial2/0	
Serial3/0	
FastEthernet4/0	

Physical Config CLI Attributes

GLOBAL	Static Routes
Settings	Network 192.168.10
Algorithm Settings	Mask 255.255.255.0
ROUTING	Next Hop 192.168.30.2
Static	
RIP	Add
INTERFACE	
FastEthernet0/0	Network Address
FastEthernet1/0	192.168.10.0/24 via 192.168.30.2
Serial2/0	
Serial3/0	
FastEthernet4/0	

Physical Config **Desktop** Programming Attributes

Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.20.2

Pinging 192.168.20.2 with 32 bytes of data:

Request timed out.
Reply from 192.168.20.2: bytes=32 time=1ms TTL=126
Reply from 192.168.20.2: bytes=32 time=1ms TTL=126
Reply from 192.168.20.2: bytes=32 time=1ms TTL=126

Ping statistics for 192.168.20.2:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 1ms, Average = 1ms

C:\>ping 192.168.20.3

Pinging 192.168.20.3 with 32 bytes of data:

Reply from 192.168.20.3: bytes=32 time=1ms TTL=254
Reply from 192.168.20.3: bytes=32 time=1ms TTL=254
Reply from 192.168.20.3: bytes=32 time=1ms TTL=254
Reply from 192.168.20.3: bytes=32 time=11ms TTL=254

Ping statistics for 192.168.20.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 11ms, Average = 3ms

C:\>
```

Physical Config **Desktop** Programming Attributes

Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.10.2

Pinging 192.168.10.2 with 32 bytes of data:

Reply from 192.168.10.2: bytes=32 time=1ms TTL=126
Reply from 192.168.10.2: bytes=32 time=11ms TTL=126
Reply from 192.168.10.2: bytes=32 time=1ms TTL=126
Reply from 192.168.10.2: bytes=32 time=1ms TTL=126

Ping statistics for 192.168.10.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 11ms, Average = 3ms

C:\>
```