


Configuring Static Routing in cisco packet tracer using command line
Done by Samip Khadka

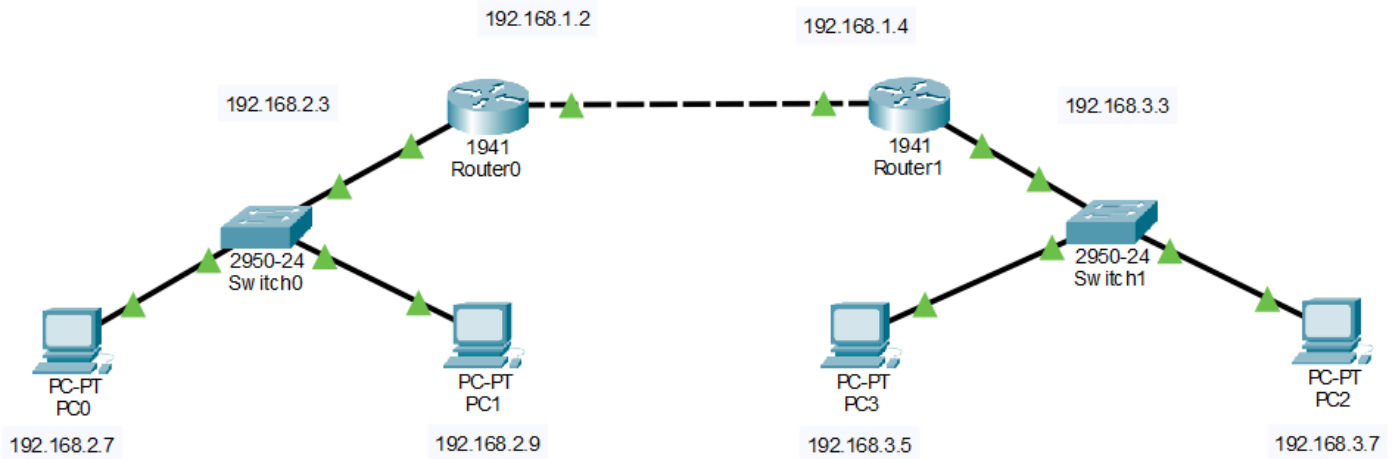

PC0

Physical	Config	Desktop	Programming	Attrib
IP Configuration				
Interface		FastEthernet0		
IP Configuration				
☐ DHCP		☒ Static		
IPv4 Address		192.168.2.7		
Subnet Mask		255.255.255.0		
Default Gateway		192.168.2.3		
DNS Server		0.0.0.0		

PC1

Physical	Config	Desktop	Programming	Attrib
IP Configuration				
Interface		FastEthernet0		
IP Configuration				
☐ DHCP		☒ Static		
IPv4 Address		192.168.2.9		
Subnet Mask		255.255.255.0		
Default Gateway		192.168.2.3		
DNS Server		0.0.0.0		

PC2

Physical	Config	Desktop	Programming	Attrib
IP Configuration				
Interface		FastEthernet0		
IP Configuration				
☐ DHCP		☒ Static		
IPv4 Address		192.168.3.7		
Subnet Mask		255.255.255.0		
Default Gateway		192.168.3.3		
DNS Server		0.0.0.0		

PC3

Physical	Config	Desktop	Programming	Attrib
IP Configuration				
Interface		FastEthernet0		
IP Configuration				
☐ DHCP		☒ Static		
IPv4 Address		192.168.3.5		
Subnet Mask		255.255.255.0		
Default Gateway		192.168.3.3		
DNS Server		0.0.0.0		

Physical **Config** CLI Attributes

GLOBAL

Settings

Algorithm Settings

ROUTING

Static

RIP

SWITCHING

VLAN Database

INTERFACE

FastEthernet0/0

FastEthernet0/1

FastEthernet0/0

Port Status ☒ On

Link Speed ☒ 100 Mbps ☐ 10 Mbps ☒ Auto

Duplex ☒ Half Duplex ☐ Full Duplex ☒ Auto

MAC Address 0060.70C8.4201

IP Configuration

IPv4 Address 192.168.2.3

Subnet Mask 255.255.255.0

Tx Ring Limit 10

Physical **Config** CLI Attributes

GLOBAL

Settings

Algorithm Settings

ROUTING

Static

RIP

SWITCHING

VLAN Database

INTERFACE

FastEthernet0/0

FastEthernet0/1

FastEthernet0/1

Port Status ☒ On

Link Speed ☒ 100 Mbps ☐ 10 Mbps ☒ Auto

Duplex ☒ Half Duplex ☐ Full Duplex ☒ Auto

MAC Address 0060.70C8.4202

IP Configuration

IPv4 Address 192.168.1.2

Subnet Mask 255.255.255.0

Tx Ring Limit 10

Physical **Config** CLI Attributes

GLOBAL

Settings

Algorithm Settings

ROUTING

Static

RIP

SWITCHING

VLAN Database

INTERFACE

FastEthernet0/0

FastEthernet0/1

FastEthernet0/0

Port Status ☒ On

Link Speed ☒ 100 Mbps ☐ 10 Mbps ☒ Auto

Duplex ☐ Half Duplex ☒ Full Duplex ☒ Auto

MAC Address 0090.2B61.CB01

IP Configuration

IPv4 Address 192.168.3.3

Subnet Mask 255.255.255.0

Tx Ring Limit 10

Physical	Config	CLI	Attributes
GLOBAL Settings Algorithm Settings ROUTING Static RIP SWITCHING VLAN Database INTERFACE FastEthernet0/0 FastEthernet0/1 FastEthernet0/1			
Port Status ☒ On Link Speed ☒ 100 Mbps ☐ 10 Mbps ☒ Auto Duplex ☒ Half Duplex ☐ Full Duplex ☒ Auto MAC Address 0090.2B61.CB02 IP Configuration IPv4 Address 192.168.1.4 Subnet Mask 255.255.255.0 Tx Ring Limit 10			

Physical	Config	CLI	Attributes
IOS Command Line Interface <pre> Router(config-if)#no shutdown Router(config-if)# %LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up ip address 192.168.2.3 255.255.255.0 Router(config-if)#ip address 192.168.2.3 255.255.255.0 Router(config-if)# Router(config-if)#exit Router(config)#interface FastEthernet0/1 Router(config-if)#ip address 192.168.1.2 255.255.255.0 Router(config-if)# Router(config-if)#exit Router(config)#interface FastEthernet0/0 Router(config-if)# Router(config-if)#exit Router(config)#interface FastEthernet0/1 Router(config-if)#no shutdown Router(config-if)# %LINK-5-CHANGED: Interface FastEthernet0/1, changed state to up %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to up Router(config-if)# Router(config-if)#exit Router(config)#exit Router# %SYS-5-CONFIG_I: Configured from console by console Router#enable Router#configure terminal Enter configuration commands, one per line. End with CNTL/Z. Router(config)#ip route 192.168.3.0 255.255.255.0 192.168.1.4 Router(config)#exit Router# %SYS-5-CONFIG_I: Configured from console by console Router#wr Building configuration... [OK] Router# </pre>			

Physical Config CLI Attributes

IOS Command Line Interface

```
Router>enable
Router#
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface FastEthernet0/0
Router(config-if)#ip address 192.168.3.3 255.255.255.0
Router(config-if)#no shutdown
Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up

Router(config-if)#exit
Router(config)#interface FastEthernet0/1
Router(config-if)#ip address 192.168.1.4 255.255.255.0
Router(config-if)#no shutdown
Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/1, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to up

Router(config-if)#exit
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#ip route 192.168.2.0 255.255.255.0 192.168.1.2
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#wr
Building configuration...
[OK]
Router#
```

Physical Config Desktop Programming Attributes

Command Prompt

```
C:\>ping 192.168.2.9

Pinging 192.168.2.9 with 32 bytes of data:

Reply from 192.168.2.9: bytes=32 time=7ms TTL=126
Reply from 192.168.2.9: bytes=32 time<1ms TTL=126
Reply from 192.168.2.9: bytes=32 time=1ms TTL=126
Reply from 192.168.2.9: bytes=32 time=1ms TTL=126

Ping statistics for 192.168.2.9:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 7ms, Average = 2ms
```

PC1

```
Physical  Config  Desktop  Programming  Attributes

Command Prompt

C:\>ping 192.168.3.5

Pinging 192.168.3.5 with 32 bytes of data:

Reply from 192.168.3.5: bytes=32 time=11ms TTL=126
Reply from 192.168.3.5: bytes=32 time=12ms TTL=126
Reply from 192.168.3.5: bytes=32 time=11ms TTL=126
Reply from 192.168.3.5: bytes=32 time=12ms TTL=126

Ping statistics for 192.168.3.5:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 11ms, Maximum = 12ms, Average = 11ms
```

PC2

```
Physical  Config  Desktop  Programming  Attributes

Command Prompt

Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.2.7

Pinging 192.168.2.7 with 32 bytes of data:

Reply from 192.168.2.7: bytes=32 time<1ms TTL=126
Reply from 192.168.2.7: bytes=32 time<1ms TTL=126
Reply from 192.168.2.7: bytes=32 time<1ms TTL=126
Reply from 192.168.2.7: bytes=32 time=10ms TTL=126

Ping statistics for 192.168.2.7:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 10ms, Average = 2ms

C:\>ping 192.168.2.9

Pinging 192.168.2.9 with 32 bytes of data:

Reply from 192.168.2.9: bytes=32 time<1ms TTL=126
Reply from 192.168.2.9: bytes=32 time<1ms TTL=126
Reply from 192.168.2.9: bytes=32 time<1ms TTL=126
Reply from 192.168.2.9: bytes=32 time<1ms TTL=126

Ping statistics for 192.168.2.9:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>|
```