


Configuring Dynamic Routing in cisco packet tracer Done by Samip Khadka

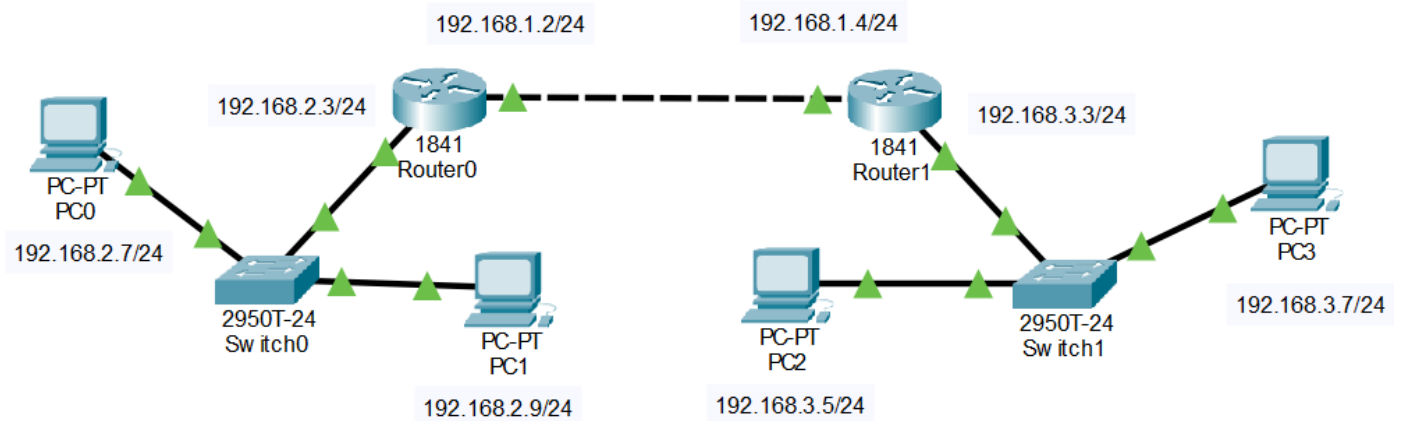

PC0

Physical	Config	Desktop	Programming	Attrib
IP Configuration				
Interface		FastEthernet0		
IP Configuration				
☐ DHCP		☒ Static		
IPv4 Address		192.168.2.7		
Subnet Mask		255.255.255.0		
Default Gateway		192.168.2.3		
DNS Server		0.0.0.0		

PC1

Physical	Config	Desktop	Programming	Attrib
IP Configuration				
Interface		FastEthernet0		
IP Configuration				
☐ DHCP		☒ Static		
IPv4 Address		192.168.2.9		
Subnet Mask		255.255.255.0		
Default Gateway		192.168.2.3		
DNS Server		0.0.0.0		

PC2

Physical	Config	Desktop	Programming	Attrib
IP Configuration				
Interface		FastEthernet0		
IP Configuration				
☐ DHCP		☒ Static		
IPv4 Address		192.168.3.5		
Subnet Mask		255.255.255.0		
Default Gateway		192.168.3.3		
DNS Server		0.0.0.0		

PC3

Physical	Config	Desktop	Programming	Attrib
IP Configuration				
Interface		FastEthernet0		
IP Configuration				
☐ DHCP		☒ Static		
IPv4 Address		192.168.3.7		
Subnet Mask		255.255.255.0		
Default Gateway		192.168.3.3		
DNS Server		0.0.0.0		

Router0

Physical Config CLI Attributes

GLOBAL

Settings

Algorithm Settings

ROUTING

Static

RIP

SWITCHING

VLAN Database

INTERFACE

FastEthernet0/0

FastEthernet0/1

FastEthernet0/0

Port Status

On

Link Speed

100 Mbps 10 Mbps Auto

Duplex

Half Duplex Full Duplex Auto

MAC Address00E0.F9EA.C901

IP Configuration

IPv4 Address192.168.2.3

Subnet Mask255.255.255.0

Tx Ring Limit10

Router0

Physical Config CLI Attributes

GLOBAL

Settings

Algorithm Settings

ROUTING

Static

RIP

SWITCHING

VLAN Database

INTERFACE

FastEthernet0/0

FastEthernet0/1

FastEthernet0/1

Port Status

On

Link Speed

100 Mbps 10 Mbps Auto

Duplex

Half Duplex Full Duplex Auto

MAC Address00E0.F9EA.C902

IP Configuration

IPv4 Address192.168.1.2

Subnet Mask255.255.255.0

Tx Ring Limit10

Router0

Physical Config CLI Attributes

GLOBAL

Settings

Algorithm Settings

ROUTING

Static

RIP

SWITCHING

VLAN Database

INTERFACE

FastEthernet0/0

FastEthernet0/1

RIP Routing

Network

Add

Network Address

192.168.1.0

192.168.2.0

Physical **Config** CLI Attributes

GLOBAL

Settings

Algorithm Settings

ROUTING

Static

RIP

SWITCHING

VLAN Database

INTERFACE

FastEthernet0/0

FastEthernet0/1

Global Settings

Display Name: Router0

Hostname: Router

NVRAM: Erase Save

Startup Config: Load... Export...

Running Config: Export... Merge...

Device Clock: 00:31:43 Mon Mar 1 1993 UTC

Physical **Config** CLI Attributes

GLOBAL

Settings

Algorithm Settings

ROUTING

Static

RIP

SWITCHING

VLAN Database

INTERFACE

FastEthernet0/0

FastEthernet0/1

FastEthernet0/0

Port Status: ☒ On

Link Speed: ☒ 100 Mbps ☐ 10 Mbps ☒ Auto

Duplex: ☐ Half Duplex ☒ Full Duplex ☒ Auto

MAC Address: 00D0.BA63.6701

IP Configuration

IPv4 Address: 192.168.1.4

Subnet Mask: 255.255.255.0

Tx Ring Limit: 10

Physical **Config** CLI Attributes

GLOBAL

Settings

Algorithm Settings

ROUTING

Static

RIP

SWITCHING

VLAN Database

INTERFACE

FastEthernet0/0

FastEthernet0/1

FastEthernet0/1

Port Status: ☒ On

Link Speed: ☒ 100 Mbps ☐ 10 Mbps ☒ Auto

Duplex: ☐ Half Duplex ☒ Full Duplex ☒ Auto

MAC Address: 00D0.BA63.6702

IP Configuration

IPv4 Address: 192.168.3.3

Subnet Mask: 255.255.255.0

Tx Ring Limit: 10

Router1

Physical **Config** CLI Attributes

GLOBAL

Settings

Algorithm Settings

ROUTING

Static

RIP

SWITCHING

VLAN Database

RIP Routing

Network

Add

Network Address
192.168.1.0
192.168.3.0

Router1

Physical **Config** CLI Attributes

GLOBAL

Settings

Algorithm Settings

ROUTING

Static

RIP

SWITCHING

VLAN Database

INTERFACE

FastEthernet0/0

FastEthernet0/1

Global Settings

Display Name Router1

Hostname Router

NVRAM Erase Save

Startup Config Load... Export...

Running Config Export... Merge...

Device Clock: 00:32:58 Mon Mar 1 1993 UTC

PC3

Physical Config **Desktop** Programming Attributes

Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.2.7

Pinging 192.168.2.7 with 32 bytes of data:

Reply from 192.168.2.7: bytes=32 time=11ms TTL=126
Reply from 192.168.2.7: bytes=32 time=1ms TTL=126
Reply from 192.168.2.7: bytes=32 time<1ms TTL=126
Reply from 192.168.2.7: bytes=32 time=12ms TTL=126

Ping statistics for 192.168.2.7:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 12ms, Average = 6ms

C:\>|
```

PC0

```
Physical  Config  Desktop  Programming  Attributes

Command Prompt

C:\>ping 192.168.3.5

Pinging 192.168.3.5 with 32 bytes of data:

Request timed out.
Reply from 192.168.3.5: bytes=32 time=13ms TTL=126
Reply from 192.168.3.5: bytes=32 time=10ms TTL=126
Reply from 192.168.3.5: bytes=32 time=12ms TTL=126

Ping statistics for 192.168.3.5:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 10ms, Maximum = 13ms, Average = 11ms

C:\>ping 192.168.3.7

Pinging 192.168.3.7 with 32 bytes of data:

Reply from 192.168.3.7: bytes=32 time<1ms TTL=126
Reply from 192.168.3.7: bytes=32 time<1ms TTL=126
Reply from 192.168.3.7: bytes=32 time<1ms TTL=126
Reply from 192.168.3.7: bytes=32 time<1ms TTL=126

Ping statistics for 192.168.3.7:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

PC1

```
Physical  Config  Desktop  Programming  Attributes

Command Prompt

Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.3.5

Pinging 192.168.3.5 with 32 bytes of data:

Reply from 192.168.3.5: bytes=32 time=11ms TTL=126
Reply from 192.168.3.5: bytes=32 time<1ms TTL=126
Reply from 192.168.3.5: bytes=32 time=10ms TTL=126
Reply from 192.168.3.5: bytes=32 time<1ms TTL=126

Ping statistics for 192.168.3.5:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 11ms, Average = 5ms
```