


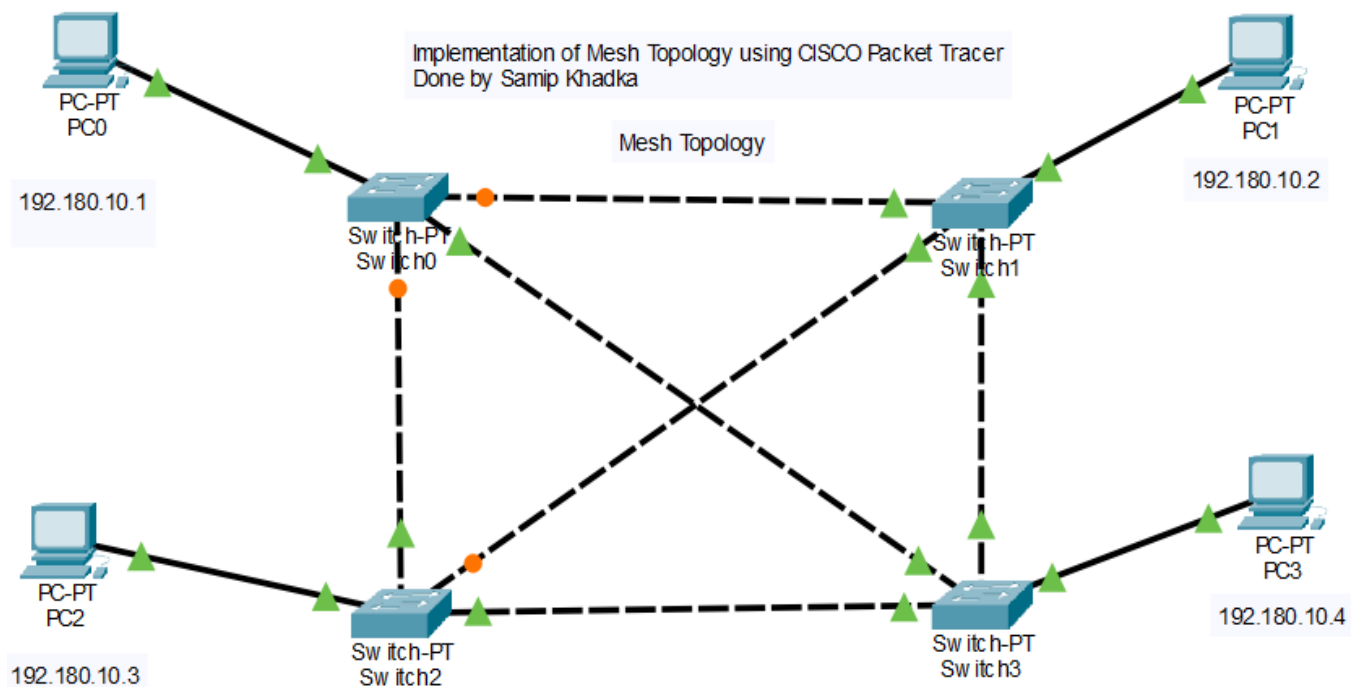

PC0

Physical Config **Desktop** Programming Attributes

IP Configuration

Interface FastEthernet0

IP Configuration

☐ DHCP ☒ Static

IPv4 Address 192.180.10.1

Subnet Mask 255.255.255.0

Default Gateway 0.0.0.0

DNS Server 0.0.0.0

PC1

Physical Config **Desktop** Programming Attributes

IP Configuration

Interface FastEthernet0

IP Configuration

☐ DHCP ☒ Static

IPv4 Address 192.180.10.2

Subnet Mask 255.255.255.0

Default Gateway 0.0.0.0

DNS Server 0.0.0.0

PC2

Physical Config **Desktop** Programming Attributes

IP Configuration

Interface FastEthernet0

IP Configuration

☐ DHCP ☒ Static

IPv4 Address 192.180.10.3

Subnet Mask 255.255.255.0

Default Gateway 0.0.0.0

DNS Server 0.0.0.0

PC3

Physical Config **Desktop** Programming Attributes

IP Configuration

Interface FastEthernet0

IP Configuration

☐ DHCP ☒ Static

IPv4 Address 192.180.10.4

Subnet Mask 255.255.255.0

Default Gateway 0.0.0.0

DNS Server 0.0.0.0

Physical Config **Desktop** Programming Attributes

Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.180.10.1

Pinging 192.180.10.1 with 32 bytes of data:

Reply from 192.180.10.1: bytes=32 time=10ms TTL=128
Reply from 192.180.10.1: bytes=32 time=2ms TTL=128
Reply from 192.180.10.1: bytes=32 time=11ms TTL=128
Reply from 192.180.10.1: bytes=32 time<1ms TTL=128

Ping statistics for 192.180.10.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 11ms, Average = 5ms

C:\>ping 192.180.10.2

Pinging 192.180.10.2 with 32 bytes of data:

Reply from 192.180.10.2: bytes=32 time=10ms TTL=128
Reply from 192.180.10.2: bytes=32 time=1ms TTL=128
Reply from 192.180.10.2: bytes=32 time<1ms TTL=128
Reply from 192.180.10.2: bytes=32 time<1ms TTL=128

Ping statistics for 192.180.10.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 10ms, Average = 2ms

C:\>ping 192.180.10.3

Pinging 192.180.10.3 with 32 bytes of data:

Reply from 192.180.10.3: bytes=32 time=10ms TTL=128
Reply from 192.180.10.3: bytes=32 time<1ms TTL=128
Reply from 192.180.10.3: bytes=32 time<1ms TTL=128
Reply from 192.180.10.3: bytes=32 time<1ms TTL=128

Ping statistics for 192.180.10.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 10ms, Average = 2ms
```

Physical Config **Desktop** Programming Attributes

Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.180.10.4

Pinging 192.180.10.4 with 32 bytes of data:

Reply from 192.180.10.4: bytes=32 time=1ms TTL=128
Reply from 192.180.10.4: bytes=32 time<1ms TTL=128
Reply from 192.180.10.4: bytes=32 time<1ms TTL=128
Reply from 192.180.10.4: bytes=32 time=1ms TTL=128

Ping statistics for 192.180.10.4:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms
```