


Implementation of Ring Topology using CISCO Packet Tracer
Done by Samip Khadka

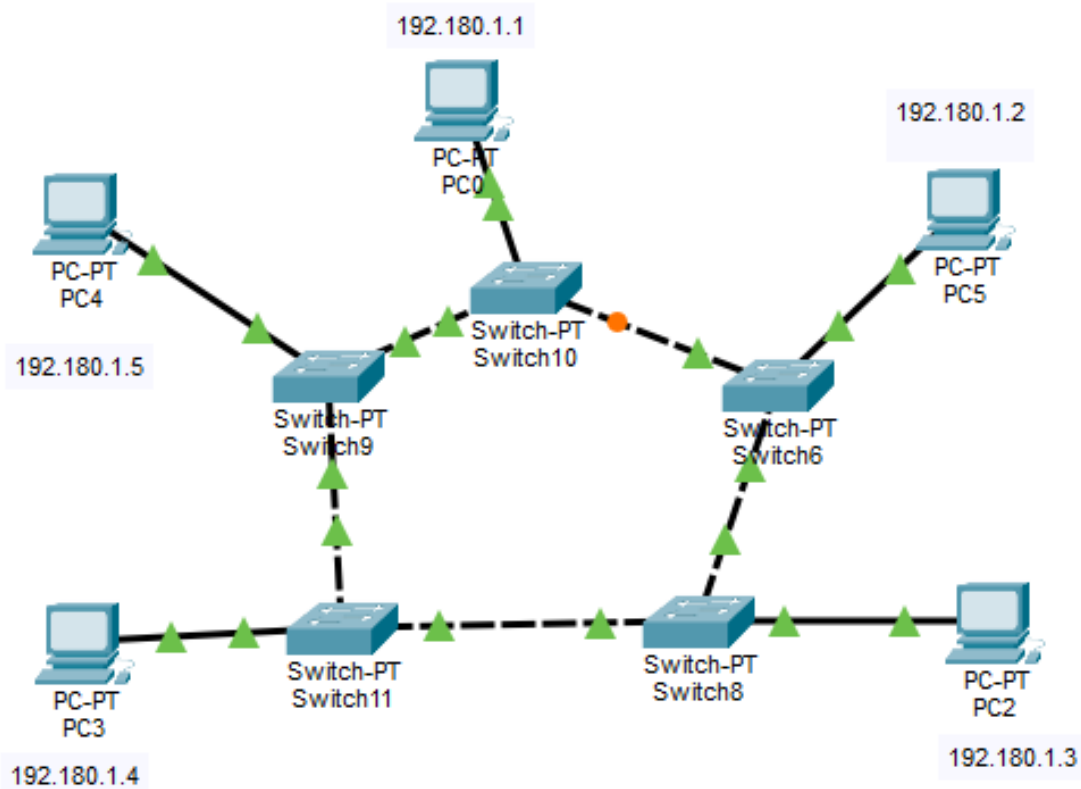

PC0

Physical Config **Desktop** Programming Attributes

IP Configuration

Interface FastEthernet0

IP Configuration

☐ DHCP ☒ Static

IPv4 Address 192.180.1.1

Subnet Mask 255.255.255.0

Default Gateway 0.0.0.0

DNS Server 0.0.0.0

IPv6 Configuration

☐ Automatic ☒ Static

IPv6 Address

Link Local Address FE80::210:11FF:FE8C:5927

Default Gateway

DNS Server

PC5

Physical Config **Desktop** Programming Attributes

IP Configuration

Interface FastEthernet0

IP Configuration

☐ DHCP ☒ Static

IPv4 Address 192.180.1.2

Subnet Mask 255.255.255.0

Default Gateway 0.0.0.0

DNS Server 0.0.0.0

PC2

Physical Config **Desktop** Programming Attributes

IP Configuration

Interface FastEthernet0

IP Configuration

☐ DHCP ☒ Static

IPv4 Address 192.180.1.3

Subnet Mask 255.255.255.0

Default Gateway 0.0.0.0

DNS Server 0.0.0.0

PC3

Physical Config **Desktop** Programming Attributes

IP Configuration

Interface FastEthernet0

IP Configuration

☐ DHCP ☒ Static

IPv4 Address 192.180.1.4

Subnet Mask 255.255.255.0

Default Gateway 0.0.0.0

DNS Server 0.0.0.0

PC4

Physical Config **Desktop** Programming Attributes

IP Configuration

Interface FastEthernet0

IP Configuration

☐ DHCP ☒ Static

IPv4 Address 192.180.1.5

Subnet Mask 255.255.255.0

Default Gateway 0.0.0.0

DNS Server 0.0.0.0

PC4

Physical Config **Desktop** Programming Attributes

Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.180.1.4

Pinging 192.180.1.4 with 32 bytes of data:

Reply from 192.180.1.4: bytes=32 time=10ms TTL=128
Reply from 192.180.1.4: bytes=32 time<1ms TTL=128
Reply from 192.180.1.4: bytes=32 time=13ms TTL=128
Reply from 192.180.1.4: bytes=32 time<1ms TTL=128

Ping statistics for 192.180.1.4:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 13ms, Average = 5ms
```

Physical Config Desktop Programming Attributes

Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.180.1.2

Pinging 192.180.1.2 with 32 bytes of data:

Reply from 192.180.1.2: bytes=32 time=10ms TTL=128
Reply from 192.180.1.2: bytes=32 time=1ms TTL=128
Reply from 192.180.1.2: bytes=32 time=10ms TTL=128
Reply from 192.180.1.2: bytes=32 time<1ms TTL=128

Ping statistics for 192.180.1.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 10ms, Average = 5ms

C:\>ping 192.180.1.3

Pinging 192.180.1.3 with 32 bytes of data:

Reply from 192.180.1.3: bytes=32 time=10ms TTL=128
Reply from 192.180.1.3: bytes=32 time<1ms TTL=128
Reply from 192.180.1.3: bytes=32 time<1ms TTL=128
Reply from 192.180.1.3: bytes=32 time=1ms TTL=128

Ping statistics for 192.180.1.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 10ms, Average = 2ms

C:\>ping 192.180.1.4

Pinging 192.180.1.4 with 32 bytes of data:

Reply from 192.180.1.4: bytes=32 time=10ms TTL=128
Reply from 192.180.1.4: bytes=32 time=1ms TTL=128
Reply from 192.180.1.4: bytes=32 time<1ms TTL=128
Reply from 192.180.1.4: bytes=32 time<1ms TTL=128

Ping statistics for 192.180.1.4:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 10ms, Average = 2ms
```