


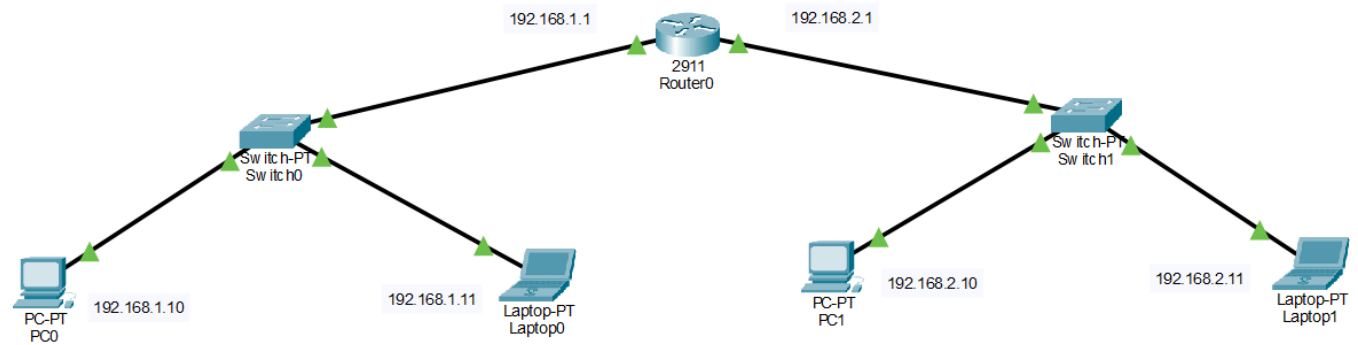

Router0

Physical Config CLI Attributes

### IOS Command Line Interface

```
DRAM configuration is 64 bits wide with parity disabled.
256K bytes of non-volatile configuration memory.
249856K bytes of ATA System CompactFlash 0 (Read/Write)
```

--- System Configuration Dialog ---

Would you like to enter the initial configuration dialog? [yes/no]: no

Press RETURN to get started!

```
Router>enable
```

```
Router#configure terminal
```

```
Enter configuration commands, one per line. End with CNTL/Z.
```

```
Router(config)#interface GigabitEthernet 0/0
```

```
Router(config-if)#ip address 192.168.1.1 255.255.255.0
```

```
Router(config-if)#no shutdown
```

```
Router(config-if)#
```

```
%LINK-5-CHANGED: Interface GigabitEthernet0/0, changed state to up
```

```
%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/0, changed state to up
```

```
Router(config-if)#interface GigabitEthernet 0/1
```

```
Router(config-if)#ip address 192.168.2.1 255.255.255.0
```

```
Router(config-if)#no shutdown
```

```
Router(config-if)#
```

```
%LINK-5-CHANGED: Interface GigabitEthernet0/1, changed state to up
```

```
%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/1, changed state to up
```

```
Router(config-if)#exit
```

```
Router(config)#exit
```

```
Router#
```

```
%SYS-5-CONFIG_I: Configured from console by console
```

```
Router#
```

PC0

Physical Config **Desktop** Programming Attributes

IP Configuration

Interface FastEthernet0

IP Configuration

☐ DHCP ☒ Static

IPv4 Address 192.168.1.10

Subnet Mask 255.255.255.0

Default Gateway 192.168.1.1

DNS Server 0.0.0.0

Laptop0

Physical Config **Desktop** Programming Attributes

IP Configuration

Interface FastEthernet0

IP Configuration

☐ DHCP ☒ Static

IPv4 Address 192.168.1.11

Subnet Mask 255.255.255.0

Default Gateway 192.168.1.1

DNS Server 0.0.0.0

PC1

Physical Config **Desktop** Programming Attributes

IP Configuration

Interface FastEthernet0

IP Configuration

☐ DHCP ☒ Static

IPv4 Address 192.168.2.10

Subnet Mask 255.255.255.0

Default Gateway 192.168.2.1

DNS Server 0.0.0.0

Laptop1

Physical Config **Desktop** Programming Attributes

IP Configuration

Interface FastEthernet0

IP Configuration

☐ DHCP ☒ Static

IPv4 Address 192.168.2.11

Subnet Mask 255.255.255.0

Default Gateway 192.168.2.1

DNS Server 0.0.0.0

Laptop0

Physical Config **Desktop** Programming Attributes

Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.2.10

Pinging 192.168.2.10 with 32 bytes of data:

Request timed out.
Reply from 192.168.2.10: bytes=32 time=1ms TTL=127
Reply from 192.168.2.10: bytes=32 time=1ms TTL=127
Reply from 192.168.2.10: bytes=32 time<1ms TTL=127

Ping statistics for 192.168.2.10:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>
```

PC1

```
Physical  Config  Desktop  Programming  Attributes

Command Prompt

Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.10

Pinging 192.168.1.10 with 32 bytes of data:

Reply from 192.168.1.10: bytes=32 time<1ms TTL=127
Reply from 192.168.1.10: bytes=32 time<1ms TTL=127
Reply from 192.168.1.10: bytes=32 time<1ms TTL=127
Reply from 192.168.1.10: bytes=32 time<1ms TTL=127

Ping statistics for 192.168.1.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping 192.168.1.1

Pinging 192.168.1.1 with 32 bytes of data:

Reply from 192.168.1.1: bytes=32 time<1ms TTL=255
Reply from 192.168.1.1: bytes=32 time=1ms TTL=255
Reply from 192.168.1.1: bytes=32 time<1ms TTL=255
Reply from 192.168.1.1: bytes=32 time<1ms TTL=255

Ping statistics for 192.168.1.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>
```

PC0

```
Physical  Config  Desktop  Programming  Attributes

Command Prompt

Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.2.1

Pinging 192.168.2.1 with 32 bytes of data:

Reply from 192.168.2.1: bytes=32 time<1ms TTL=255
Reply from 192.168.2.1: bytes=32 time<1ms TTL=255
Reply from 192.168.2.1: bytes=32 time<1ms TTL=255
Reply from 192.168.2.1: bytes=32 time=1ms TTL=255

Ping statistics for 192.168.2.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>
```