



# Dimension

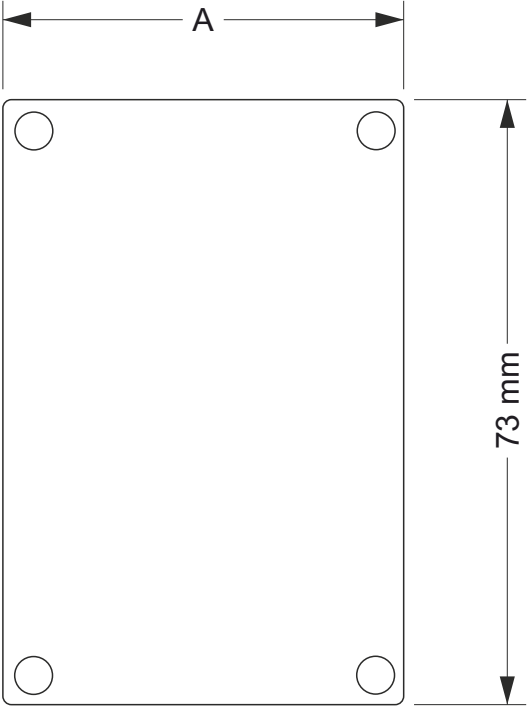

# How To Order

ST485-XXX-XX-XCH-X

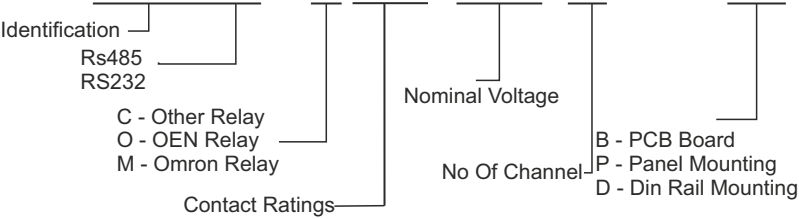

| Part No            | A (mm) |
|--------------------|--------|
| ST485-C10-XX-1CH-B | 26     |
| ST485-C10-XX-2CH-B | 61     |
| ST485-C10-XX-4CH-B | 86     |
| ST485-C10-XX-6CH-B | 122    |
| ST485-C10-XX-8CH-B | 159    |

## Single Relay Specification

|                                           |                        |
|-------------------------------------------|------------------------|
| CONTACT RATINGS                           | 10A 250VAC, 15A 125VAC |
| CONTACT RESISTANCE                        | 100mΩ                  |
| Insulation Resistance                     | 100MΩMin at 500VDC     |
| Dielectric Strength Between Open Contacts | 750 VRMS               |
| Between Contacts and coil                 | 1500 VRMS              |
| Operate Time                              | 10ms                   |
| Coil Power                                | 0.36W                  |
| Working Temperature                       | -40°C ~ 105°C          |

## Single Channel Relay Specification

| Part No            | Nominal Voltage (VDC) | Coil Resistance (Ω±10%) | Pull In Voltage (VDC) | Release Voltage (VDC) | Nominal Wattage (W) |
|--------------------|-----------------------|-------------------------|-----------------------|-----------------------|---------------------|
| ST485-C10-05-1CH-X | 5                     | 70                      | 3.75                  | 0.50                  | 0.42                |
| ST485-C10-06-1CH-X | 6                     | 100                     | 4.50                  | 0.60                  | 0.42                |
| ST485-C10-09-1CH-X | 9                     | 225                     | 7.30                  | 0.90                  | 0.42                |
| ST485-C10-12-1CH-X | 12                    | 400                     | 9.80                  | 1.2                   | 0.42                |
| ST485-C10-24-1CH-X | 24                    | 1600                    | 20.10                 | 2.4                   | 0.42                |

Note: Original Marking On board **TS**



The Specification are for the customer's reference and are subject to change without notice