Interop QOS

2026-03-23-12-56-20

Objective

The objective of the QoS (Quality of Service) traffic throughput test is to measure the maximum achievable throughput of a network under specific QoS settings and conditions. By conducting this test, we aim to assess the capacity of network to handle high volumes of traffic while maintaining acceptable performance levels, ensuring that the network meets the required QoS standards and can adequately support the expected user demands.

Test Configuration	Device List	vivonew(Android), macoss-MacBook-Air.local(Mac)
	Number of Stations	Total(2) Android(1) Mac(1)
	AP Model	Cisco
	SSID	NETGEAR_5G_wpa2
	Traffic Duration in hours	0.02
	Security	wpa2
	Protocol	UDP
	Traffic Direction	Bi-direction
	TOS	['BK', 'BE', 'VI', 'VO']
	Per TOS Load in Mbps	Upload:1.0 Mbps,Download:1.0 Mbps

Overall Bi-direction Throughput for all TOS i.e BK | BE | Video (VI) | Voice (VO)

No of Stations	Throughput for Load 1.0 Mbps-upload	Throughput for Load 1.0 Mbps-download
2	BK : 1.32, BE : 1.96, VI: 1.9, VO: 1.75	BK : 1.32, BE : 1.96, VI: 1.91, VO: 1.75

Overall Bi-direction throughput for 2 clients with different TOS.

The below graph represents overall Bi-direction throughput for all connected stations running BK, BE, VO, VI traffic with different intended loadsUpload:1.0 Mbps,Download:1.0 Mbps per tos

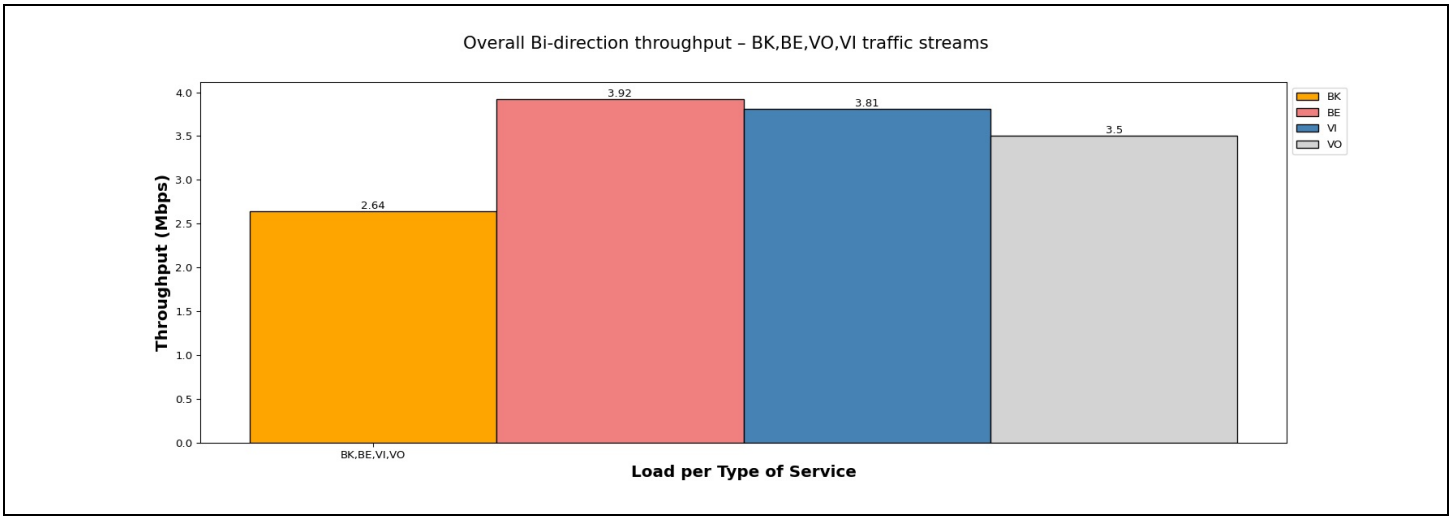

Individual Bi-direction throughput with intended load Upload:1.0 Mbps,Download:1.0 Mbps/station for traffic BK(WiFi).

The below graph represents individual throughput for 2 clients running BK (WiFi) traffic. X- axis shows “Throughput in Mbps” and Y-axis shows “number of clients”.

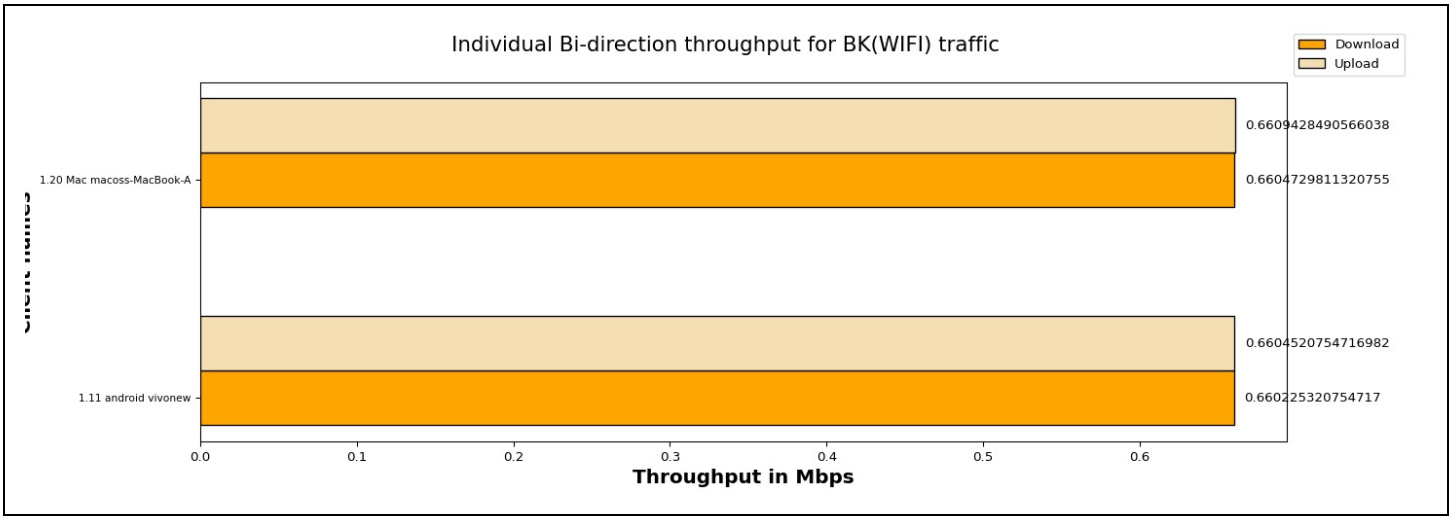

Client Name	MAC	SSID	Type of traffic	Offered upload rate	Offered download rate	Observed average upload rate	Observed average download rate	Observed Upload Drop (%)	Observed Download Drop (%)
1.11 android vivonew	92:da:84:1a:a3:75	NETGEAR_5G_wpa2	Background	1.0 Mbps	1.0 Mbps	0.6604520754716982 Mbps	0.660225320754717 Mbps	0.028721	0.013904
1.20 Mac macoss-MacBook-Air.local	30:35:ad:c5:e1:be	NETGEAR_5G_wpa2	Background	1.0 Mbps	1.0 Mbps	0.6609428490566038 Mbps	0.6604729811320755 Mbps	0.067779	0.000000

Individual Bi-direction throughput with intended load Upload:1.0 Mbps,Download:1.0 Mbps/station for traffic BE(WiFi).

The below graph represents individual throughput for 2 clients running BE (WiFi) traffic. X- axis shows "number of clients" and Y-axis shows "Throughput in Mbps".

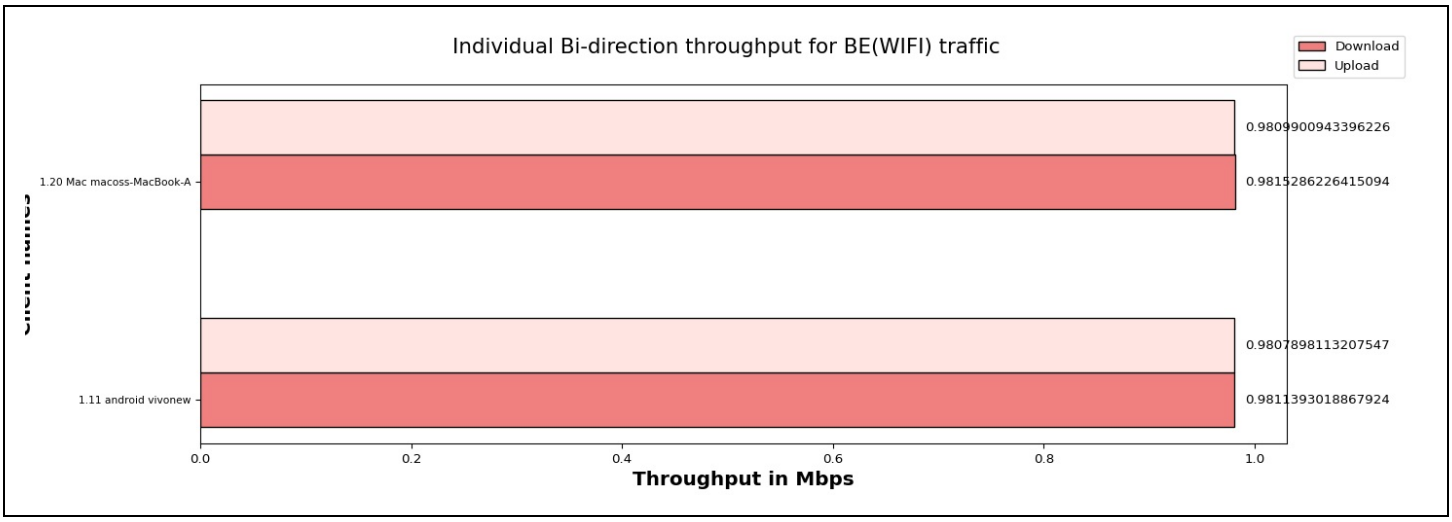

Client Name	MAC	SSID	Type of traffic	Offered upload rate	Offered download rate	Observed average upload rate	Observed average download rate	Observed Upload Drop (%)	Observed Download Drop (%)
1.11 android vivonew	92:da:84:1a:a3:75	NETGEAR_5G_wpa2	Besteffort	1.0 Mbps	1.0 Mbps	0.9807898113207547 Mbps	0.9811393018867924 Mbps	0.028758	0.014878
1.20 Mac macoss-MacBook-Air.local	30:35:ad:c5:e1:be	NETGEAR_5G_wpa2	Besteffort	1.0 Mbps	1.0 Mbps	0.9809900943396226 Mbps	0.9815286226415094 Mbps	0.001767	0.001353

Individual Bi-direction throughput with intended load Upload:1.0 Mbps,Download:1.0 Mbps/station for traffic VI(WiFi).

The below graph represents individual throughput for 2 clients running VI (WiFi) traffic. X- axis shows "number of clients" and Y-axis shows "Throughput in Mbps".

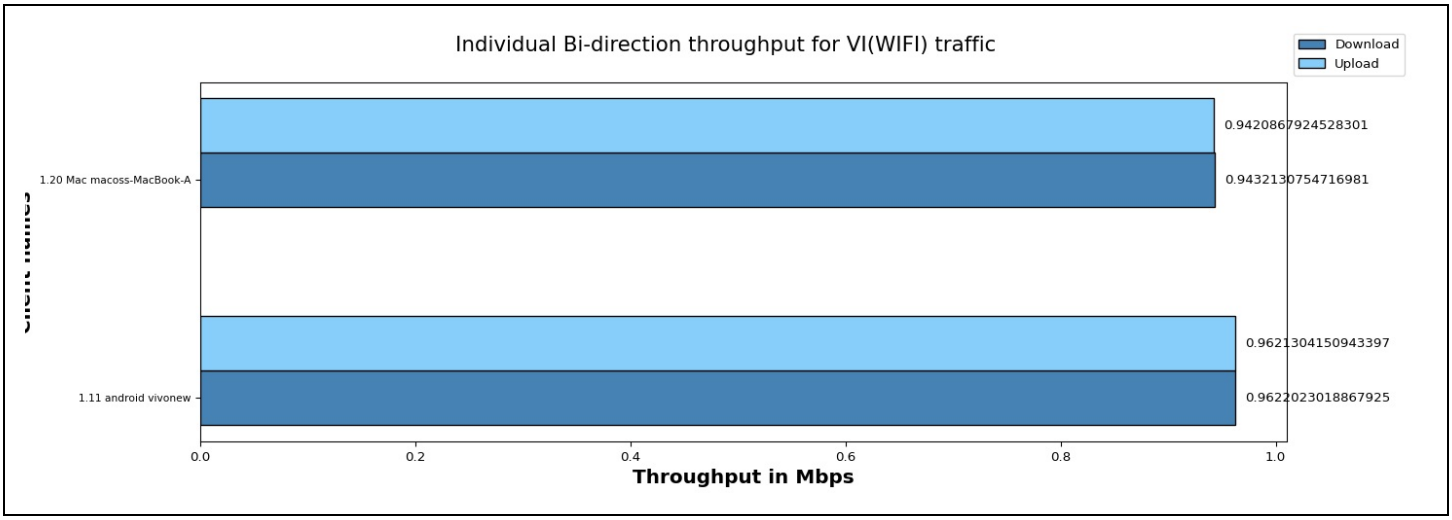

Client Name	MAC	SSID	Type of traffic	Offered upload rate	Offered download rate	Observed average upload rate	Observed average download rate	Observed Upload Drop (%)	Observed Download Drop (%)
1.11 android vivonew	92:da:84:1a:a3:75	NETGEAR_5G_wpa2	Video	1.0 Mbps	1.0 Mbps	0.9621304150943397 Mbps	0.9622023018867925 Mbps	0.003805	0.071258
1.20 Mac macoss-MacBook-Air.local	30:35:ad:c5:e1:be	NETGEAR_5G_wpa2	Video	1.0 Mbps	1.0 Mbps	0.9420867924528301 Mbps	0.9432130754716981 Mbps	0.018895	0.000000

Individual Bi-direction throughput with intended load Upload:1.0 Mbps,Download:1.0 Mbps/station for traffic VO(WiFi).

The below graph represents individual throughput for 2 clients running VO (WiFi) traffic. X- axis shows "number of clients" and Y-axis shows "Throughput in Mbps".

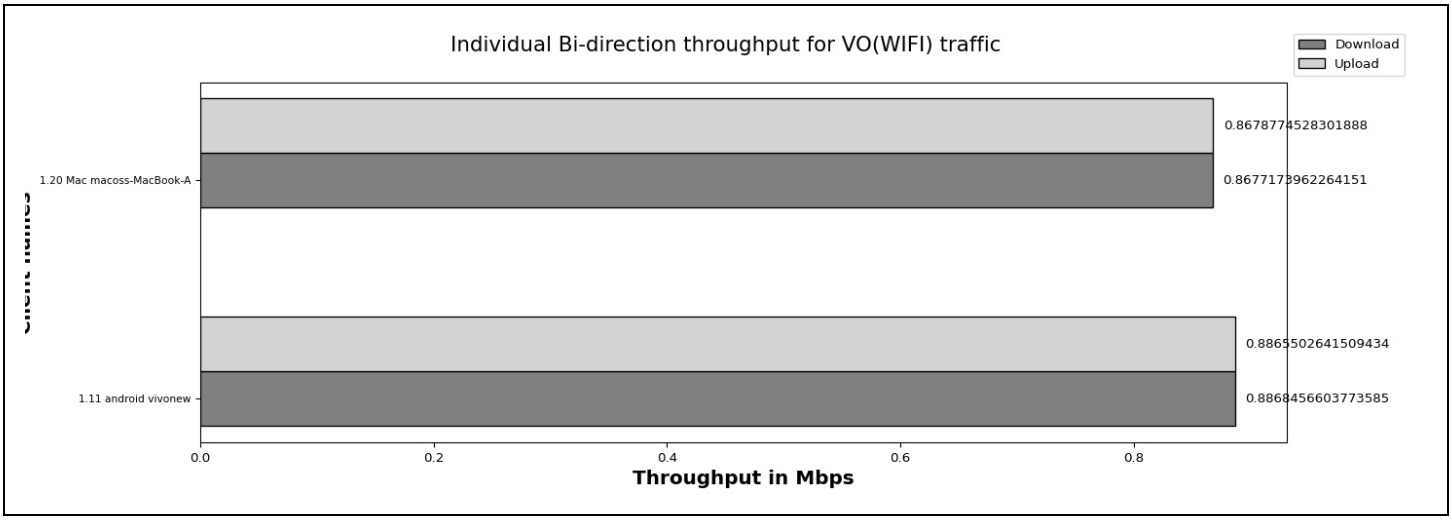

Client Name	MAC	SSID	Type of traffic	Offered upload rate	Offered download rate	Observed average upload rate	Observed average download rate	Observed Upload Drop (%)	Observed Download Drop (%)
1.11 android vivonew	92:da:84:1a:a3:75	NETGEAR_5G_wpa2	Voice	1.0 Mbps	1.0 Mbps	0.8865502641509434 Mbps	0.8868456603773585 Mbps	0.000382	0.052682
1.20 Mac macoss-MacBook-Air.local	30:35:ad:c5:e1:be	NETGEAR_5G_wpa2	Voice	1.0 Mbps	1.0 Mbps	0.8678774528301888 Mbps	0.8677173962264151 Mbps	0.000980	0.001834

Information	contact	support@candelatech.com