Interop QOS

2026-03-23-13-04-25

Objective

The objective of the QoS (Quality of Service) traffic throughput test is to measure the maximum achievable throughput of a network under specific QoS settings and conditions. By conducting this test, we aim to assess the capacity of network to handle high volumes of traffic while maintaining acceptable performance levels, ensuring that the network meets the required QoS standards and can adequately support the expected user demands.

Test Configuration	Device List	vivonew(Android), macoss-MacBook-Air.local(Mac)
	Number of Stations	Total(2) Android(1) Mac(1)
	AP Model	Cisco
	SSID	NETGEAR_5G_wpa2
	Traffic Duration in hours	0.02
	Security	wpa2
	Protocol	UDP
	Traffic Direction	Bi-direction
	TOS	['BK', 'BE', 'VI', 'VO']
	Per TOS Load in Mbps	Upload:1.0 Mbps,Download:1.0 Mbps

Overall Bi-direction Throughput for all TOS i.e BK | BE | Video (VI) | Voice (VO)

No of Stations	Throughput for Load 1.0 Mbps-upload	Throughput for Load 1.0 Mbps-download
2	BK : 2.0, BE : 2.0, VI: 1.91, VO: 1.74	BK : 2.0, BE : 2.0, VI: 1.91, VO: 1.75

Overall Bi-direction throughput for 2 clients with different TOS.

The below graph represents overall Bi-direction throughput for all connected stations running BK, BE, VO, VI traffic with different intended loadsUpload:1.0 Mbps,Download:1.0 Mbps per tos

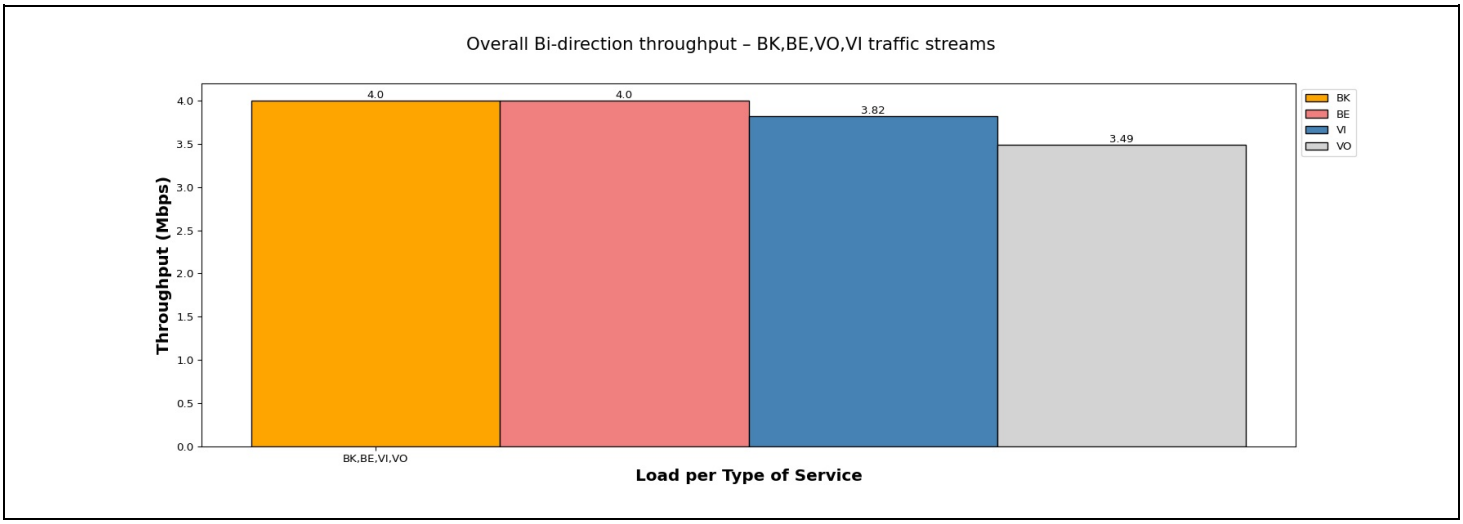

Individual Bi-direction throughput with intended load Upload:1.0 Mbps,Download:1.0 Mbps/station for traffic BK(WiFi).

The below graph represents individual throughput for 2 clients running BK (WiFi) traffic. X- axis shows “Throughput in Mbps” and Y-axis shows “number of clients”.

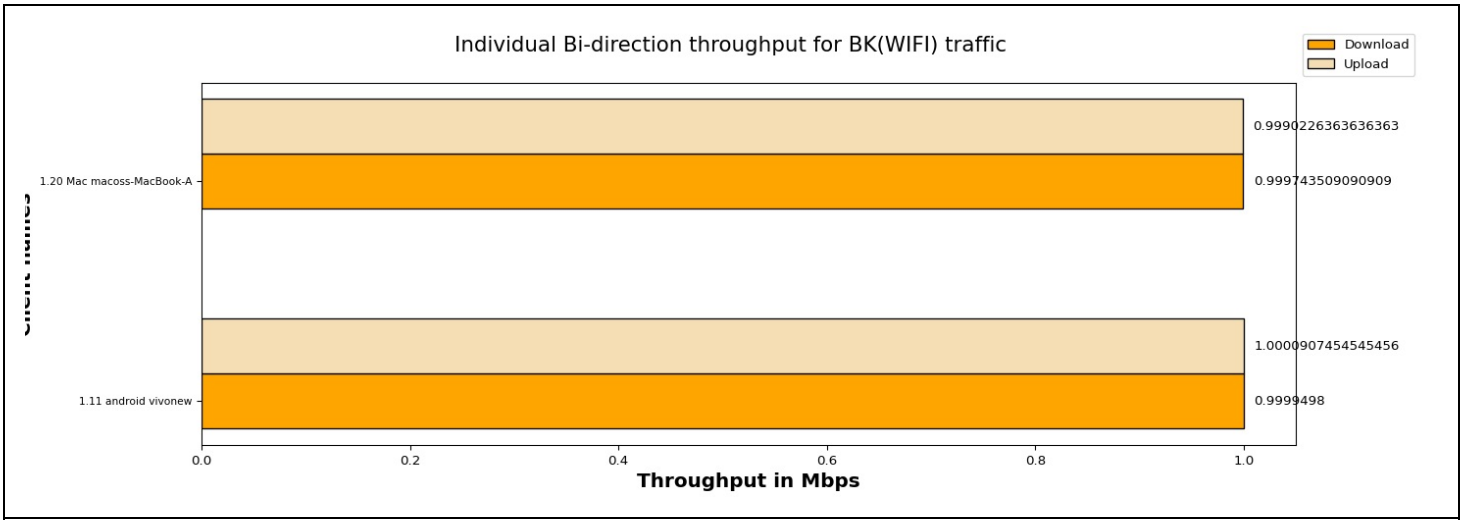

Client Name	MAC	SSID	Type of traffic	Offered upload rate	Offered download rate	Observed average upload rate	Observed average download rate	Observed Upload Drop (%)	Observed Download Drop (%)
1.11 android vivonew	92:da:84:1a:a3:75	NETGEAR_5G_wpa2	Background	1.0 Mbps	1.0 Mbps	1.0000907454545456 Mbps	0.9999498 Mbps	0.000000	0.000000
1.20 Mac macoss-MacBook-Air.local	30:35:ad:c5:e1:be	NETGEAR_5G_wpa2	Background	1.0 Mbps	1.0 Mbps	0.9990226363636363 Mbps	0.999743509090909 Mbps	0.004845	0.003066

Individual Bi-direction throughput with intended load Upload:1.0 Mbps,Download:1.0 Mbps/station for traffic BE(WiFi).

The below graph represents individual throughput for 2 clients running BE (WiFi) traffic. X- axis shows "number of clients" and Y-axis shows "Throughput in Mbps".

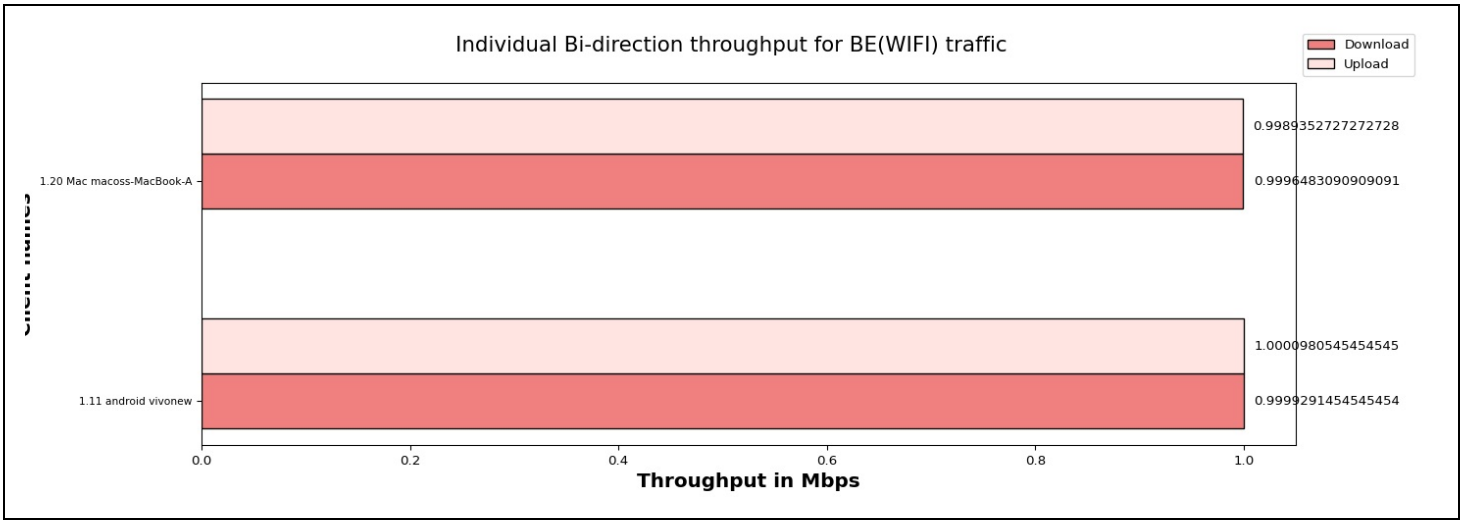

Client Name	MAC	SSID	Type of traffic	Offered upload rate	Offered download rate	Observed average upload rate	Observed average download rate	Observed Upload Drop (%)	Observed Download Drop (%)
1.11 android vivonew	92:da:84:1a:a3:75	NETGEAR_5G_wpa2	Besteffort	1.0 Mbps	1.0 Mbps	1.0000980545454545 Mbps	0.9999291454545454 Mbps	0.000000	0.000000
1.20 Mac macoss-MacBook-Air.local	30:35:ad:c5:e1:be	NETGEAR_5G_wpa2	Besteffort	1.0 Mbps	1.0 Mbps	0.9989352727272728 Mbps	0.9996483090909091 Mbps	0.000797	0.008966

Individual Bi-direction throughput with intended load Upload:1.0 Mbps,Download:1.0 Mbps/station for traffic VI(WiFi).

The below graph represents individual throughput for 2 clients running VI (WiFi) traffic. X- axis shows "number of clients" and Y-axis shows "Throughput in Mbps".

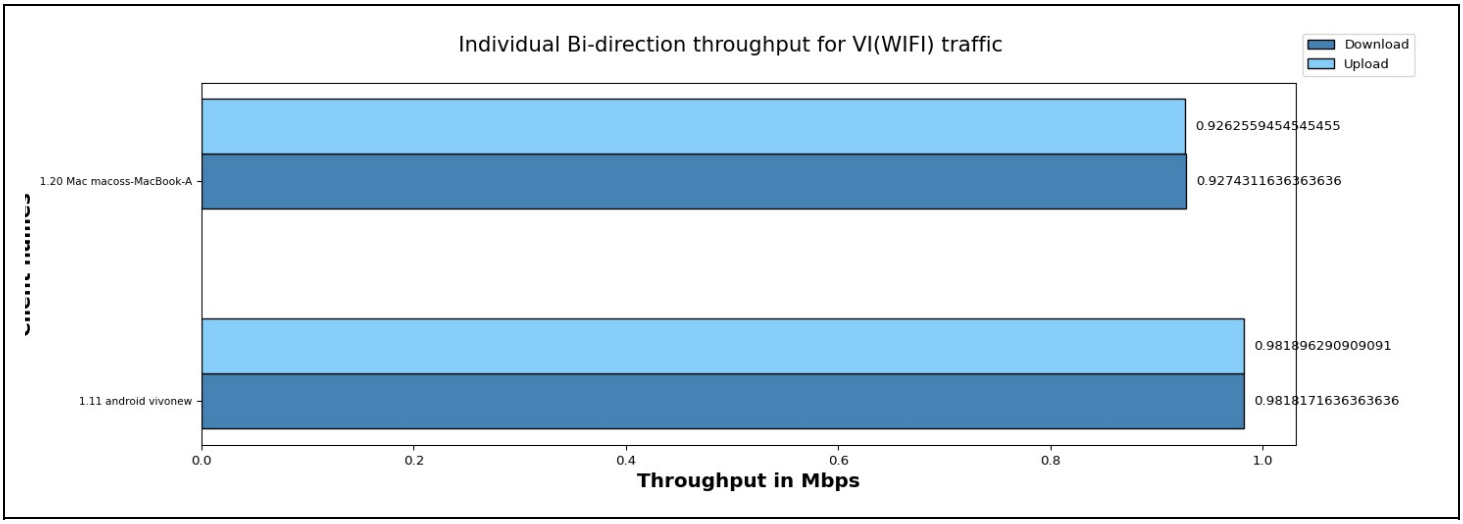

Client Name	MAC	SSID	Type of traffic	Offered upload rate	Offered download rate	Observed average upload rate	Observed average download rate	Observed Upload Drop (%)	Observed Download Drop (%)
1.11 android vivonew	92:da:84:1a:a3:75	NETGEAR_5G_wpa2	Video	1.0 Mbps	1.0 Mbps	0.981896290909091 Mbps	0.9818171636363636 Mbps	0.000000	0.00000
1.20 Mac macoss-MacBook-Air.local	30:35:ad:c5:e1:be	NETGEAR_5G_wpa2	Video	1.0 Mbps	1.0 Mbps	0.9262559454545455 Mbps	0.9274311636363636 Mbps	0.003869	0.00516

Individual Bi-direction throughput with intended load Upload:1.0 Mbps,Download:1.0 Mbps/station for traffic VO(WiFi).

The below graph represents individual throughput for 2 clients running VO (WiFi) traffic. X- axis shows “number of clients” and Y-axis shows “Throughput in Mbps”.

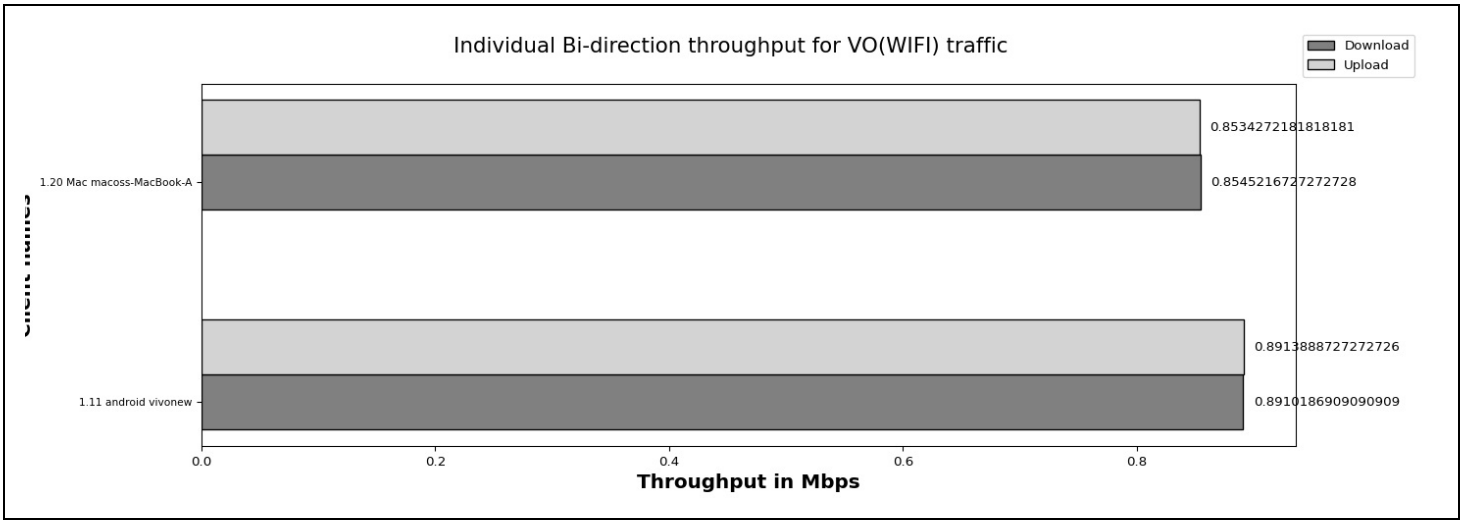

Client Name	MAC	SSID	Type of traffic	Offered upload rate	Offered download rate	Observed average upload rate	Observed average download rate	Observed Upload Drop (%)	Observed Download Drop (%)
1.11 android vivonew	92:da:84:1a:a3:75	NETGEAR_5G_wpa2	Voice	1.0 Mbps	1.0 Mbps	0.8913888727272726 Mbps	0.8910186909090909 Mbps	0.001084	0.000000
1.20 Mac macoss-MacBook-Air.local	30:35:ad:c5:e1:be	NETGEAR_5G_wpa2	Voice	1.0 Mbps	1.0 Mbps	0.8534272181818181 Mbps	0.8545216727272728 Mbps	0.006723	0.003995

Information	contact	support@candelatech.com