Interop QOS

2026-03-23-13-24-32

Objective

The objective of the QoS (Quality of Service) traffic throughput test is to measure the maximum achievable throughput of a network under specific QoS settings and conditions. By conducting this test, we aim to assess the capacity of network to handle high volumes of traffic while maintaining acceptable performance levels, ensuring that the network meets the required QoS standards and can adequately support the expected user demands.

Test Configuration	Device List	vivonew(Android), macoss-MacBook-Air.local(Mac)
	Number of Stations	Total(2) Android(1) Mac(1)
	AP Model	Cisco
	SSID	NETGEAR_5G_wpa2
	Traffic Duration in hours	0.02
	Security	wpa2
	Protocol	UDP
	Traffic Direction	Bi-direction
	TOS	['BK', 'BE', 'VI', 'VO']
	Per TOS Load in Mbps	Upload:1.0 Mbps,Download:1.0 Mbps

Overall Bi-direction Throughput for all TOS i.e BK | BE | Video (VI) | Voice (VO)

No of Stations	Throughput for Load 1.0 Mbps-upload	Throughput for Load 1.0 Mbps-download
2	BK : 1.6, BE : 1.6, VI: 1.45, VO: 1.32	BK : 2.0, BE : 1.98, VI: 1.83, VO: 1.73

Overall Bi-direction throughput for 2 clients with different TOS.

The below graph represents overall Bi-direction throughput for all connected stations running BK, BE, VO, VI traffic with different intended loadsUpload:1.0 Mbps,Download:1.0 Mbps per tos

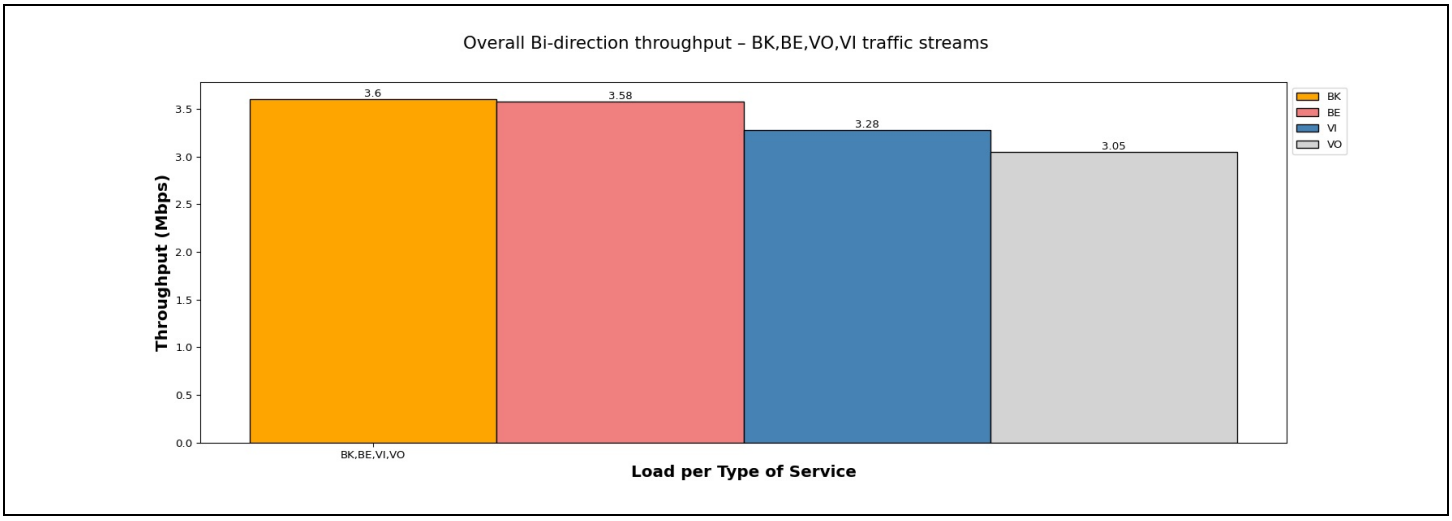

Individual Bi-direction throughput with intended load Upload:1.0 Mbps,Download:1.0 Mbps/station for traffic BK(WiFi).

The below graph represents individual throughput for 2 clients running BK (WiFi) traffic. X- axis shows “Throughput in Mbps” and Y-axis shows “number of clients”.

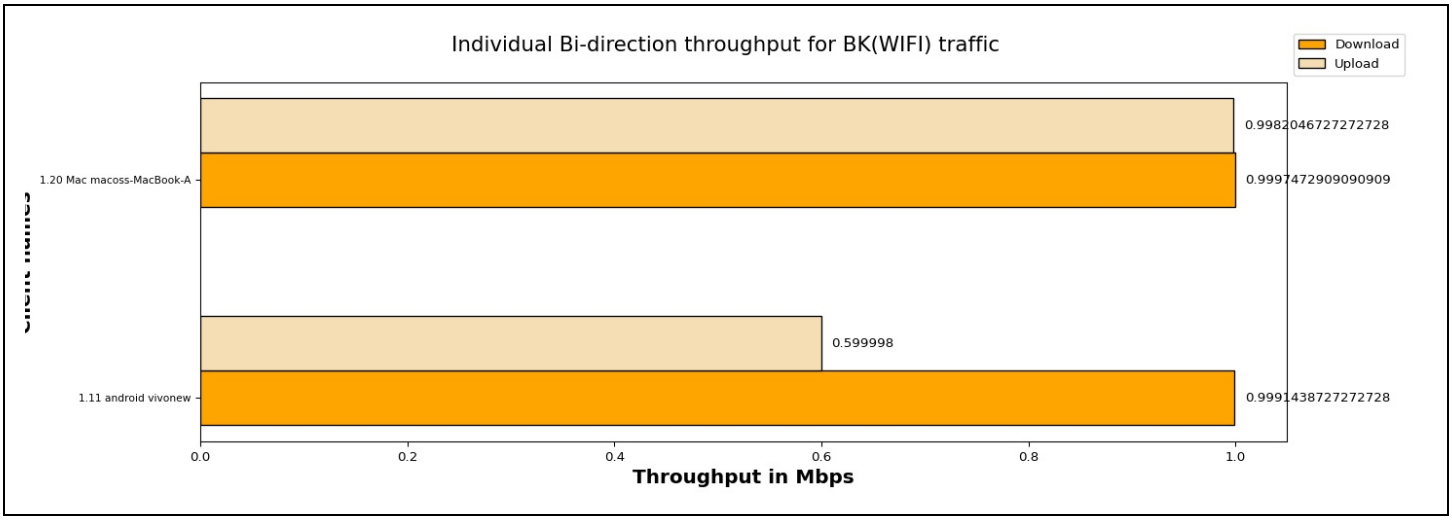

Client Name	MAC	SSID	Type of traffic	Offered upload rate	Offered download rate	Observed average upload rate	Observed average download rate	Observed Upload Drop (%)	Observed Download Drop (%)
1.11 android vivonew	92:da:84:1a:a3:75	NETGEAR_5G_wpa2	Background	1.0 Mbps	1.0 Mbps	0.599998 Mbps	0.9991438727272728 Mbps	0.002853	0.165500
1.20 Mac macoss-MacBook-Air.local	30:35:ad:c5:e1:be	NETGEAR_5G_wpa2	Background	1.0 Mbps	1.0 Mbps	0.9982046727272728 Mbps	0.9997472909090909 Mbps	0.002145	0.006247

Individual Bi-direction throughput with intended load Upload:1.0 Mbps,Download:1.0 Mbps/station for traffic BE(WiFi).

The below graph represents individual throughput for 2 clients running BE (WiFi) traffic. X- axis shows “number of clients” and Y-axis shows “Throughput in Mbps”.

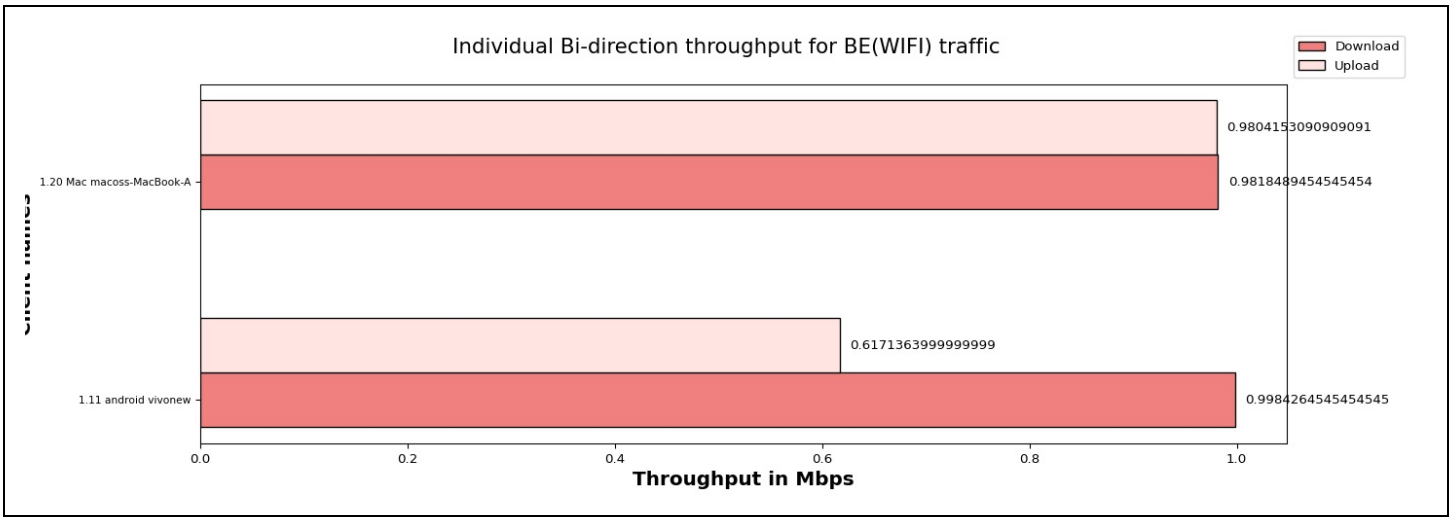

Client Name	MAC	SSID	Type of traffic	Offered upload rate	Offered download rate	Observed average upload rate	Observed average download rate	Observed Upload Drop (%)	Observed Download Drop (%)
1.11 android vivonew	92:da:84:1a:a3:75	NETGEAR_5G_wpa2	Besteffort	1.0 Mbps	1.0 Mbps	0.6171363999999999 Mbps	0.9984264545454545 Mbps	0.005277	0.521339
1.20 Mac macoss-MacBook-Air.local	30:35:ad:c5:e1:be	NETGEAR_5G_wpa2	Besteffort	1.0 Mbps	1.0 Mbps	0.9804153090909091 Mbps	0.9818489454545454 Mbps	0.004057	0.003404

Individual Bi-direction throughput with intended load Upload:1.0 Mbps,Download:1.0 Mbps/station for traffic VI(WiFi).

The below graph represents individual throughput for 2 clients running VI (WiFi) traffic. X- axis shows “number of clients” and Y-axis shows “Throughput in Mbps”.

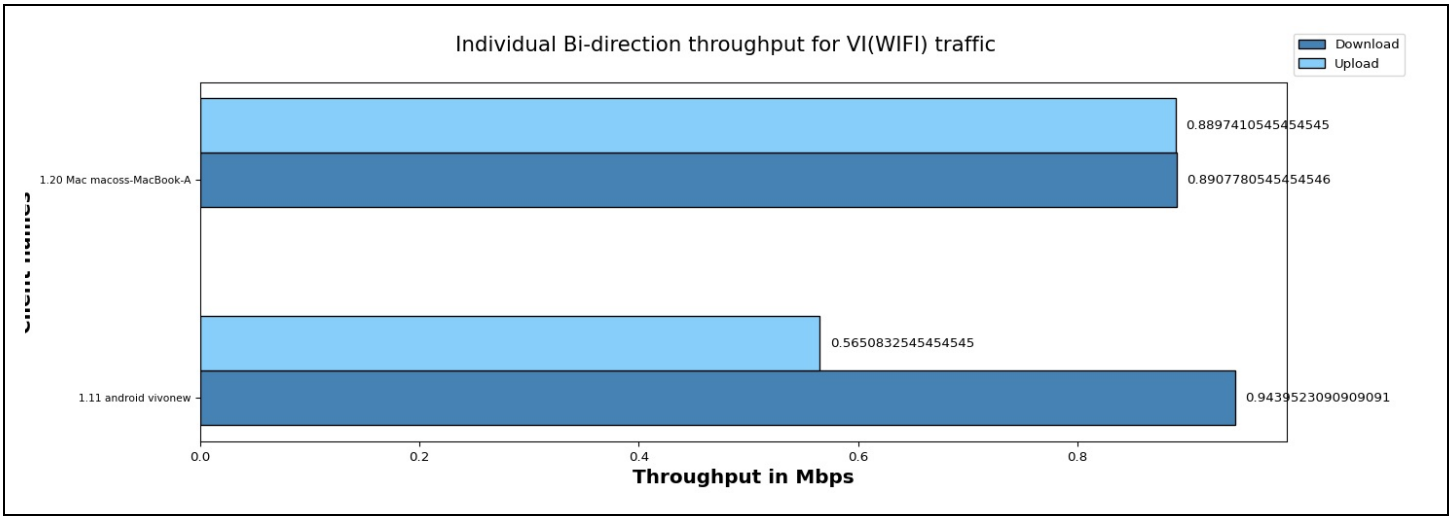

Client Name	MAC	SSID	Type of traffic	Offered upload rate	Offered download rate	Observed average upload rate	Observed average download rate	Observed Upload Drop (%)	Observed Download Drop (%)
1.11 android vivonew	92:da:84:1a:a3:75	NETGEAR_5G_wpa2	Video	1.0 Mbps	1.0 Mbps	0.5650832545454545 Mbps	0.9439523090909091 Mbps	0.00000	0.368896
1.20 Mac macoss-MacBook-Air.local	30:35:ad:c5:e1:be	NETGEAR_5G_wpa2	Video	1.0 Mbps	1.0 Mbps	0.8897410545454545 Mbps	0.8907780545454546 Mbps	0.00731	0.004959

Individual Bi-direction throughput with intended load Upload:1.0 Mbps,Download:1.0 Mbps/station for traffic VO(WiFi).

The below graph represents individual throughput for 2 clients running VO (WiFi) traffic. X- axis shows "number of clients" and Y-axis shows "Throughput in Mbps".

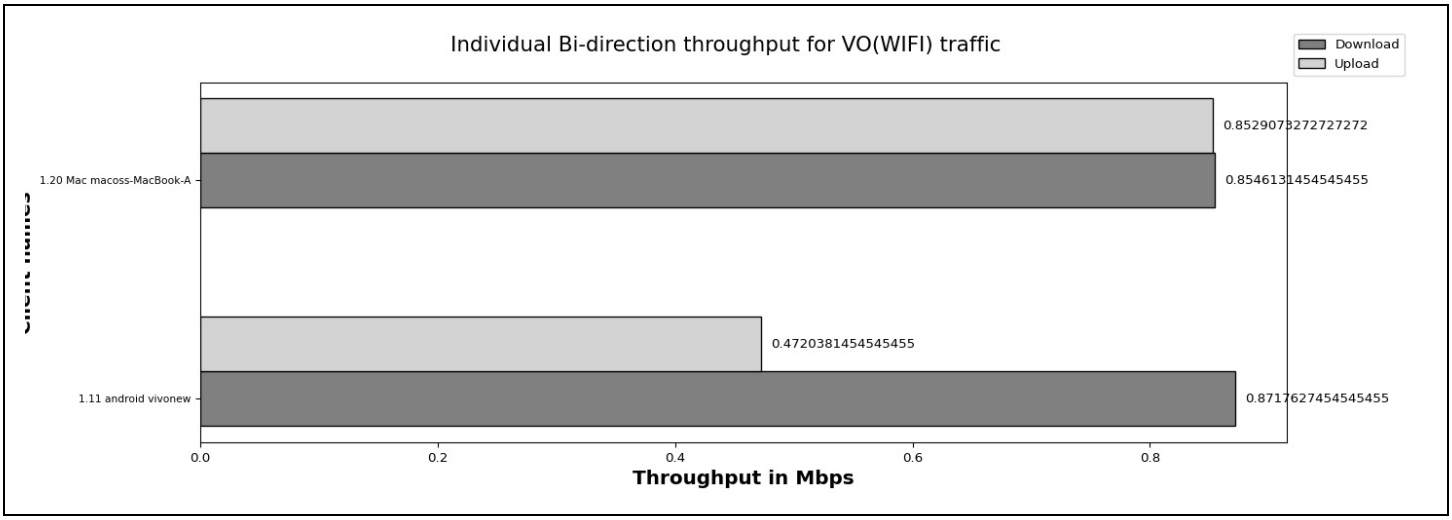

Client Name	MAC	SSID	Type of traffic	Offered upload rate	Offered download rate	Observed average upload rate	Observed average download rate	Observed Upload Drop (%)	Observed Download Drop (%)
1.11 android vivonew	92:da:84:1a:a3:75	NETGEAR_5G_wpa2	Voice	1.0 Mbps	1.0 Mbps	0.4720381454545455 Mbps	0.8717627454545455 Mbps	0.001584	0.739979
1.20 Mac macoss-MacBook-Air.local	30:35:ad:c5:e1:be	NETGEAR_5G_wpa2	Voice	1.0 Mbps	1.0 Mbps	0.8529073272727272 Mbps	0.8546131454545455 Mbps	0.000000	0.000000

Information	contact	support@candelatech.com