Mixed Traffic Test (Serial)

2026-02-19-16-10-16

Test Setup Information

Overall Setup Info For all Tests	DUT Model	Test_DUT
	DUT Firmware	NA
	SSID	Test Configured
	Security	Test Configured
	No of Devices	1 (Virtual Clients: 0, Windows: 1, Linux: 0, Mac: 0, Android: 0 ,iOS: 0)
	Test Duration (HH:MM:SS)	00:13:00

Objective

The Candela mixed traffic test is designed to measure the access point performance andstability by running multiple traffic on real clients like Android, Linux, Windows, and IOSconnected to the access point. This test allows the user to choose multiple types of traffic likeclient capacity test, web browser test, video streaming test ping test. Along with theperformance measurements are client connection times, Station 4-Way Handshake time, DHCPtimes, and more. The expected behavior is for the AP to be able to handle all types of traffic onthe several stations (within the limitations of the AP specs) and Make sure all clients can run alltypes of traffic.

Traffic Details

Sno	Test Cases	Test Duration	Test Status
1	Ping Test		
2	Quality Of Service(QOS) Test ['VO', 'BK', 'BE', 'VI']	1.0 minute	Executed
3	FTP Test		
4	HTTP Test		
5	Multicast Test		

2. Quality Of Service(QOS) Test

Test Configuration

Test Setup Information	Protocol	TCP
	Traffic Direction	Bi-direction
	Security	Test Configured
	TOS	['VO', 'BK', 'BE', 'VI']
	Per TOS Load	Upload:100.0 Mbps,Download:100.0 Mbps

Overall Bi-direction Throughput for all TOS i.e BK | BE | Video (VI) | Voice (VO)

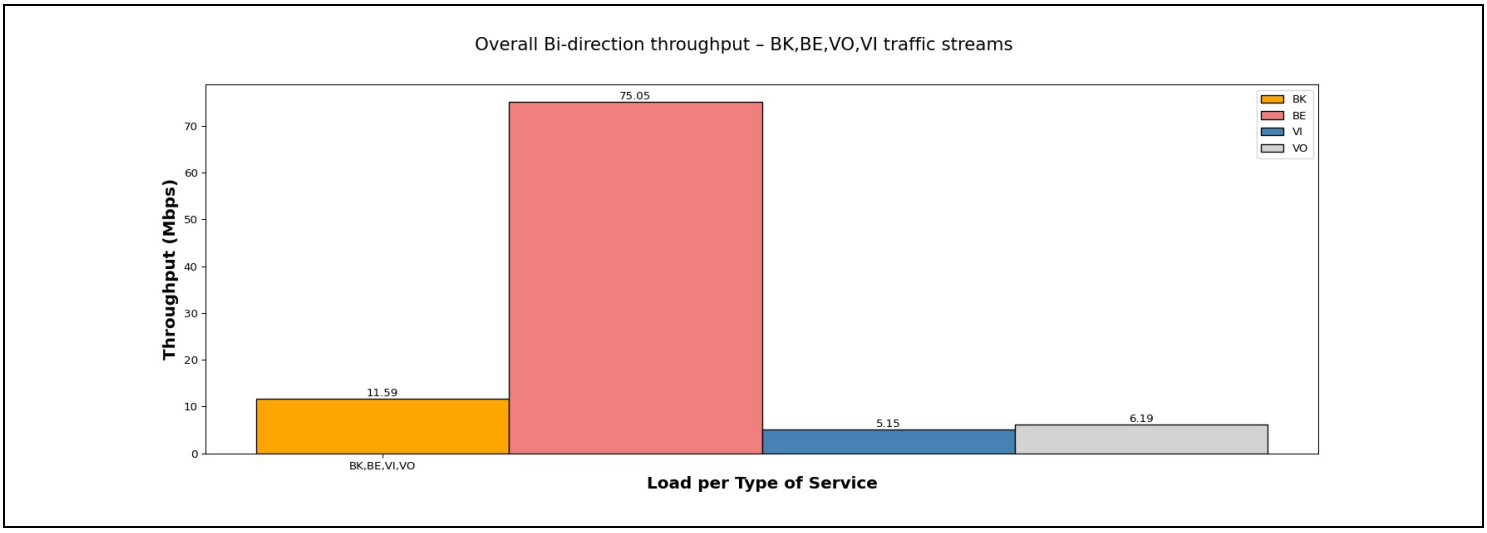

Individual Bi-direction throughput with intended load Upload:100.0 Mbps,Download:100.0 Mbps/station for traffic BK(WiFi).

The below graph represents individual throughput for 1 clients running BK (WiFi) traffic. X- axis shows "Throughput in Mbps" and Y-axis shows "number of clients".

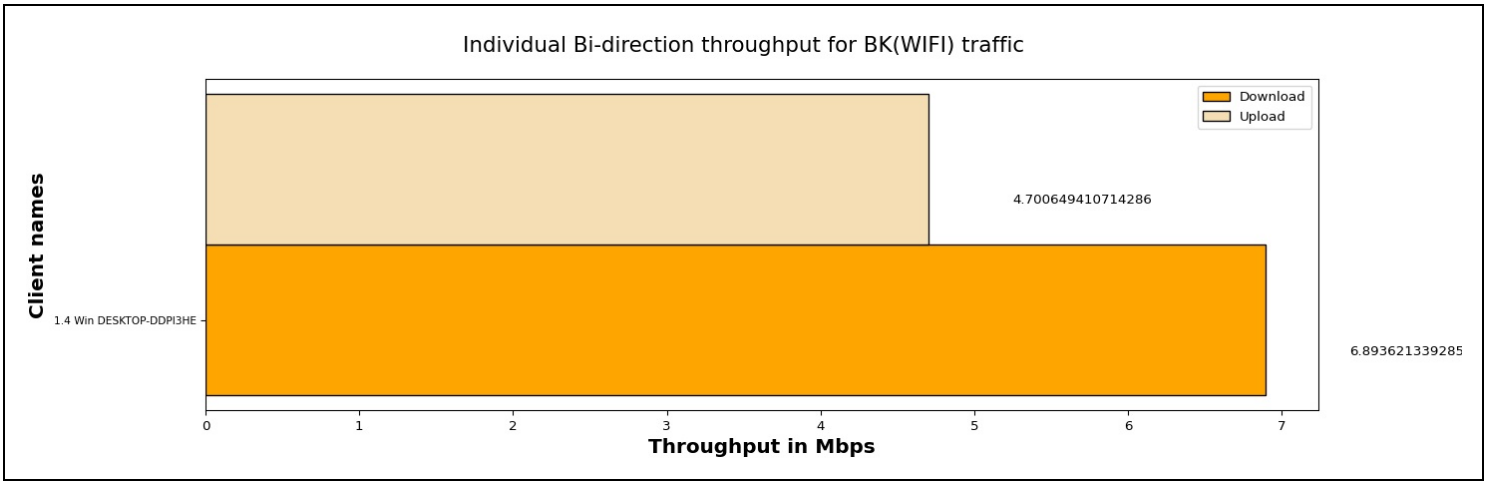

Client Name	MAC	SSID	Type of traffic	Offered upload rate	Offered download rate	Observed average upload rate	Observed average download rate	Observed Upload Drop (%)	Observed Download Drop (%)
1.4 Win DESKTOP-DDPI3HE	e4:a4:71:93:70:e7	NETGEAR_2G_wpa2	Background	100.0 Mbps	100.0 Mbps	4.700649410714286 Mbps	6.893621339285715 Mbps	0.145406	22.473775

Individual Bi-direction throughput with intended load Upload:100.0 Mbps,Download:100.0 Mbps/station for traffic BE(WiFi).

The below graph represents individual throughput for 1 clients running BE (WiFi) traffic. X- axis shows "number of clients" and Y-axis shows "Throughput in Mbps".

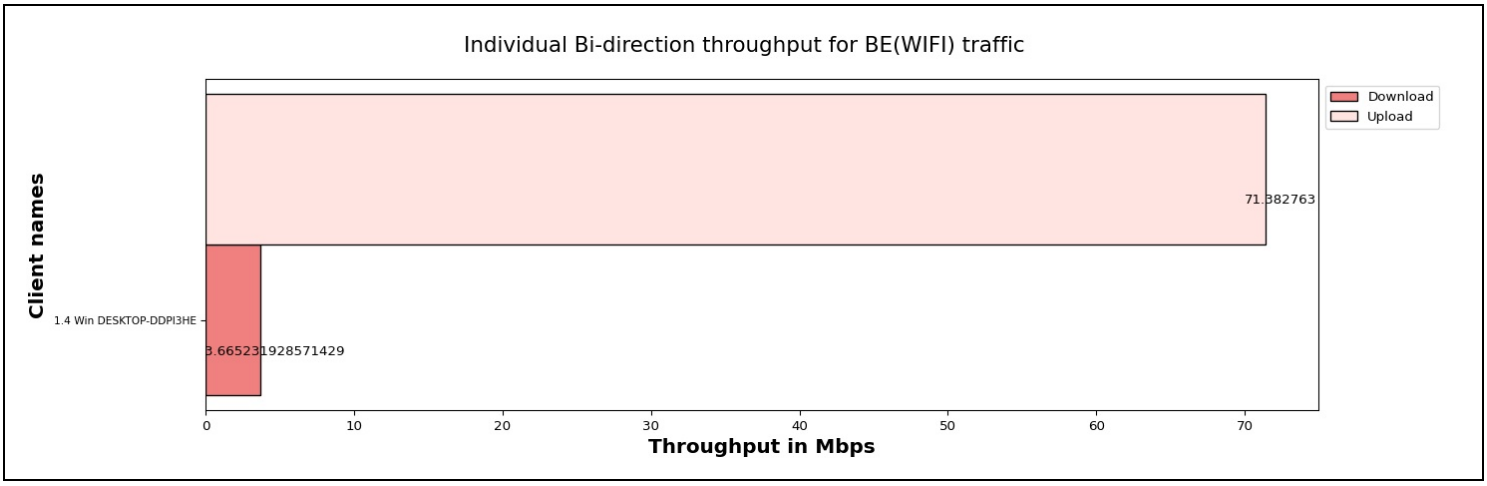

Client Name	MAC	SSID	Type of traffic	Offered upload rate	Offered download rate	Observed average upload rate	Observed average download rate	Observed Upload Drop (%)	Observed Download Drop (%)
1.4 Win DESKTOP-DDPI3HE	e4:a4:71:93:70:e7	NETGEAR_2G_wpa2	Besteffort	100.0 Mbps	100.0 Mbps	71.382763 Mbps	3.665231928571429 Mbps	0.344839	20.468165

Individual Bi-direction throughput with intended load Upload:100.0 Mbps,Download:100.0 Mbps/station for traffic VI(WiFi).

The below graph represents individual throughput for 1 clients running VI (WiFi) traffic. X- axis shows "number of clients" and Y-axis shows "Throughput in Mbps".

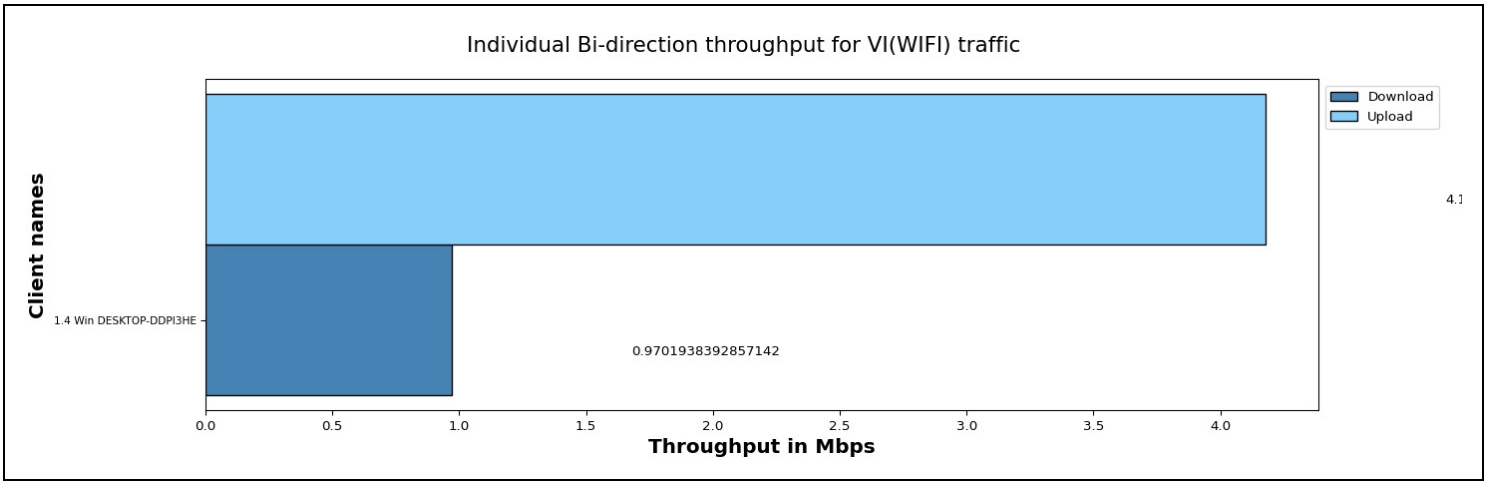

Client Name	MAC	SSID	Type of traffic	Offered upload rate	Offered download rate	Observed average upload rate	Observed average download rate	Observed Upload Drop (%)	Observed Download Drop (%)
1.4 Win DESKTOP-DDPI3HE	e4:a4:71:93:70:e7	NETGEAR_2G_wpa2	Video	100.0 Mbps	100.0 Mbps	4.1780770714285715 Mbps	0.9701938392857142 Mbps	0.099093	13.598531

Individual Bi-direction throughput with intended load Upload:100.0 Mbps,Download:100.0 Mbps/station for traffic VO(WiFi).

The below graph represents individual throughput for 1 clients running VO (WiFi) traffic. X- axis shows "number of clients" and Y-axis shows "Throughput in Mbps".

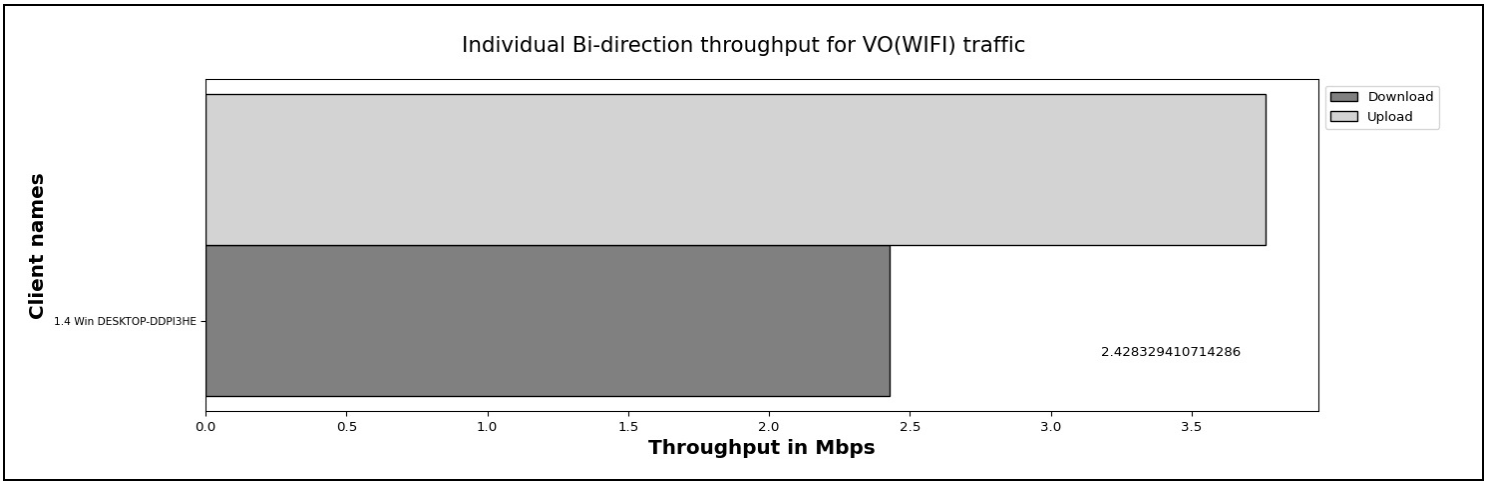

Client Name	MAC	SSID	Type of traffic	Offered upload rate	Offered download rate	Observed average upload rate	Observed average download rate	Observed Upload Drop (%)	Observed Download Drop (%)
1.4 Win DESKTOP-DDPI3HE	e4:a4:71:93:70:e7	NETGEAR_2G_wpa2	Voice	100.0 Mbps	100.0 Mbps	3.76193425 Mbps	2.428329410714286 Mbps	0.166113	33.123871

Overall Info	contact	support@candelatech.com