Mixed Traffic Test (Serial)

2026-03-11-16-28-33

Test Setup Information

Overall Setup Info For all Tests	DUT Model	Test_DUT
	DUT Firmware	NA
	SSID	Test Configured
	Security	Test Configured
	No of Devices	4 (Virtual Clients: 0, Windows: 1, Linux: 0, Mac: 1, Android: 2 ,iOS: 0)
	Test Duration (HH:MM:SS)	00:13:00

Objective

The Candela mixed traffic test is designed to measure the access point performance andstability by running multiple traffic on real clients like Android, Linux, Windows, and IOSconnected to the access point. This test allows the user to choose multiple types of traffic likeclient capacity test, web browser test, video streaming test ping test. Along with theperformance measurements are client connection times, Station 4-Way Handshake time, DHCPtimes, and more. The expected behavior is for the AP to be able to handle all types of traffic onthe several stations (within the limitations of the AP specs) and Make sure all clients can run alltypes of traffic.

Traffic Details

Sno	Test Cases	Test Duration	Test Status
1	Ping Test		
2	Quality Of Service(QOS) Test ['VI', 'VO', 'BK', 'BE']	1.0 minute	Executed
3	FTP Test		
4	HTTP Test		
5	Multicast Test		

2. Quality Of Service(QOS) Test

Test Configuration

Test Setup Information	Protocol	TCP
	Traffic Direction	Bi-direction
	Security	Test Configured
	TOS	['VI', 'VO', 'BK', 'BE']
	Per TOS Load	Upload:100.0 Mbps,Download:100.0 Mbps

Overall Bi-direction Throughput for all TOS i.e BK | BE | Video (VI) | Voice (VO)

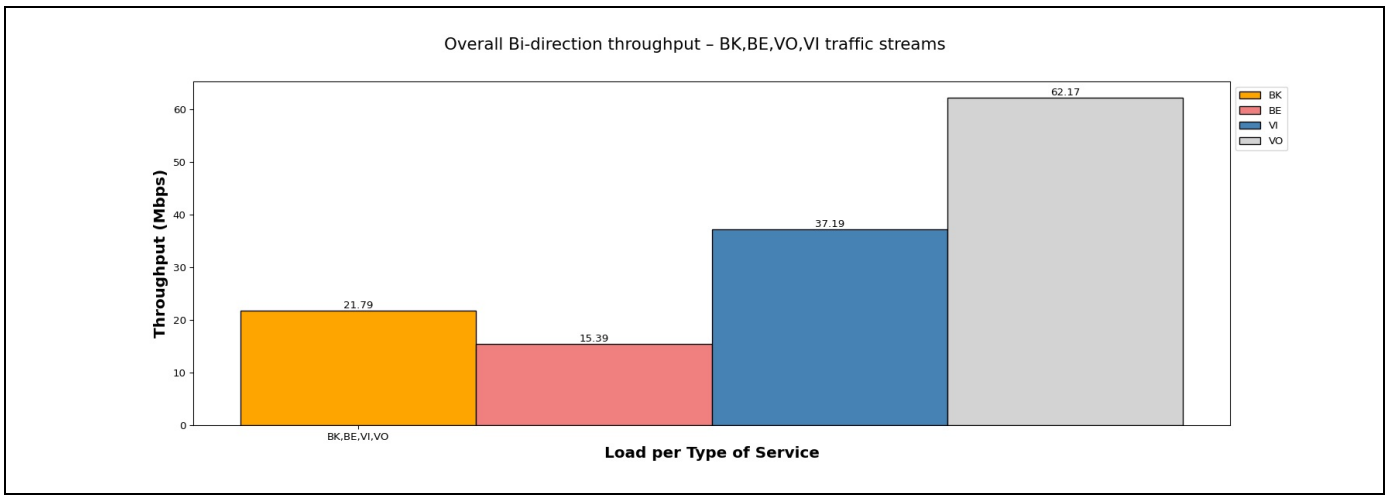

Individual Bi-direction throughput with intended load Upload:100.0 Mbps,Download:100.0 Mbps/station for traffic BK(WiFi).

The below graph represents individual throughput for 4 clients running BK (WiFi) traffic. X- axis shows "Throughput in Mbps" and Y-axis shows "number of clients".

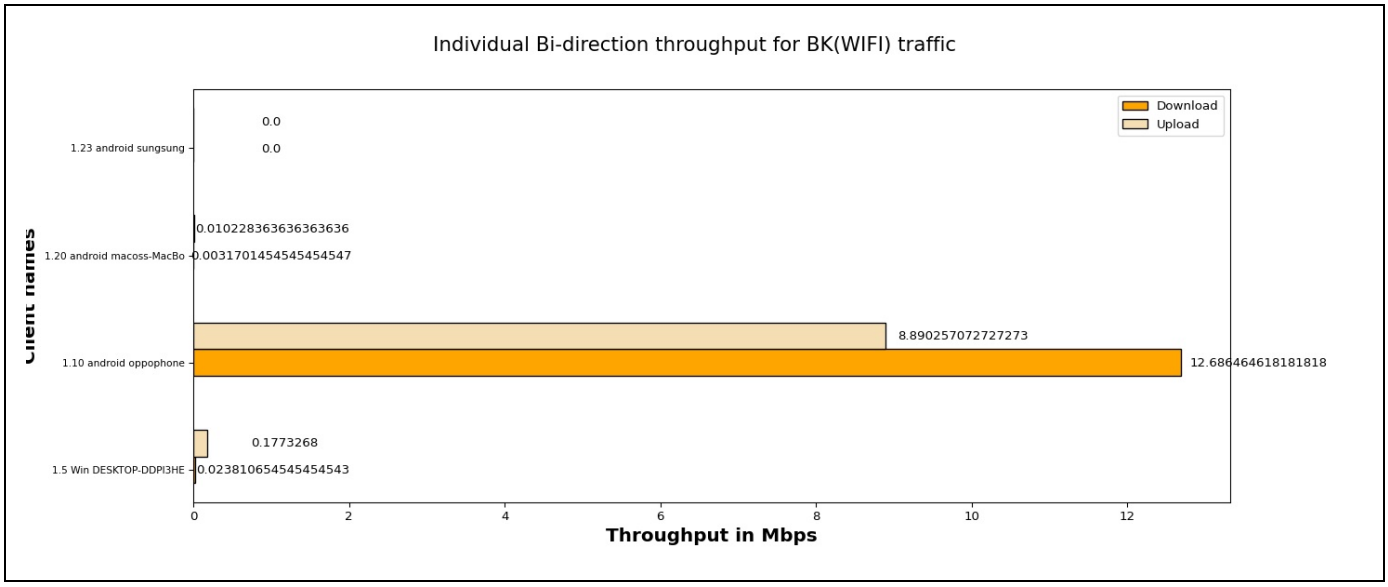

Client Name	MAC	SSID	Type of traffic	Offered upload rate	Offered download rate	Observed average upload rate	Observed average download rate	Observed Upload Drop (%)	Observed Download Drop (%)
1.5 Win DESKTOP-DDPI3HE	e4:a4:71:93:70:e7	NETGEAR_2G_wpa2	Background	100.0 Mbps	100.0 Mbps	0.1773268 Mbps	0.023810654545454543 Mbps	25.275179	77.854545
1.10 android oppophone	e6:5b:3a:c3:48:ed	NETGEAR_2G_Open	Background	100.0 Mbps	100.0 Mbps	8.890257072727273 Mbps	12.686464618181818 Mbps	3.976179	40.047656
1.20 android macoss-MacBo	30:35:ad:c5:e1:be	NETGEAR_2G_wpa2	Background	100.0 Mbps	100.0 Mbps	0.010228363636363636 Mbps	0.0031701454545454547 Mbps	99.943182	98.181818
1.23 android sungsung	46:ca:12:8c:58:67	NETGEAR_2G_wpa2	Background	100.0 Mbps	100.0 Mbps	0.0 Mbps	0.0 Mbps	0.000000	0.000000

Individual Bi-direction throughput with intended load Upload:100.0 Mbps,Download:100.0 Mbps/station for traffic BE(WiFi).

The below graph represents individual throughput for 4 clients running BE (WiFi) traffic. X- axis shows "number of clients" and Y-axis shows "Throughput in Mbps".

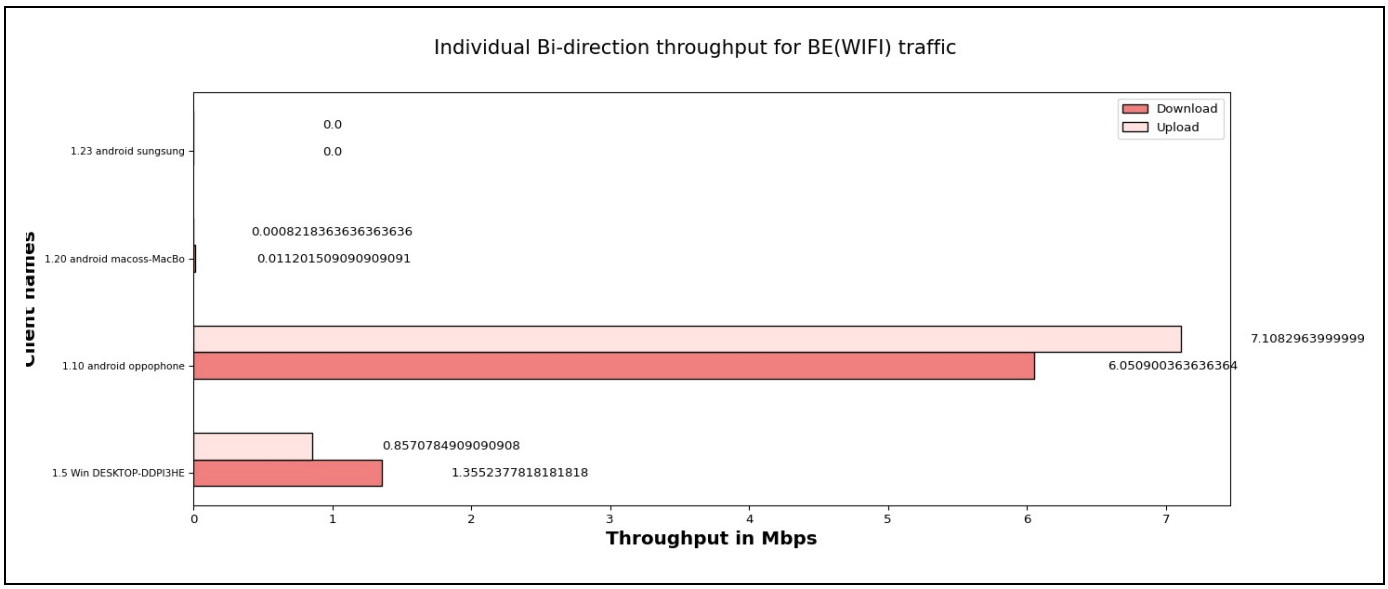

Client Name	MAC	SSID	Type of traffic	Offered upload rate	Offered download rate	Observed average upload rate	Observed average download rate	Observed Upload Drop (%)	Observed Download Drop (%)
1.5 Win DESKTOP-DDPI3HE	e4:a4:71:93:70:e7	NETGEAR_2G_wpa2	Besteffort	100.0 Mbps	100.0 Mbps	0.8570784909090908 Mbps	1.3552377818181818 Mbps	5.213002	37.496182
1.10 android oppophone	e6:5b:3a:c3:48:ed	NETGEAR_2G_Open	Besteffort	100.0 Mbps	100.0 Mbps	7.1082963999999995 Mbps	6.050900363636364 Mbps	2.717970	39.460035
1.20 android macoss-MacBo	30:35:ad:c5:e1:be	NETGEAR_2G_wpa2	Besteffort	100.0 Mbps	100.0 Mbps	0.0008218363636363636 Mbps	0.011201509090909091 Mbps	87.272727	83.636364
1.23 android sungsung	46:ca:12:8c:58:67	NETGEAR_2G_wpa2	Besteffort	100.0 Mbps	100.0 Mbps	0.0 Mbps	0.0 Mbps	0.000000	0.000000

Individual Bi-direction throughput with intended load Upload:100.0 Mbps,Download:100.0 Mbps/station for traffic VI(WiFi).

The below graph represents individual throughput for 4 clients running VI (WiFi) traffic. X- axis shows "number of clients" and Y-axis shows "Throughput in Mbps".

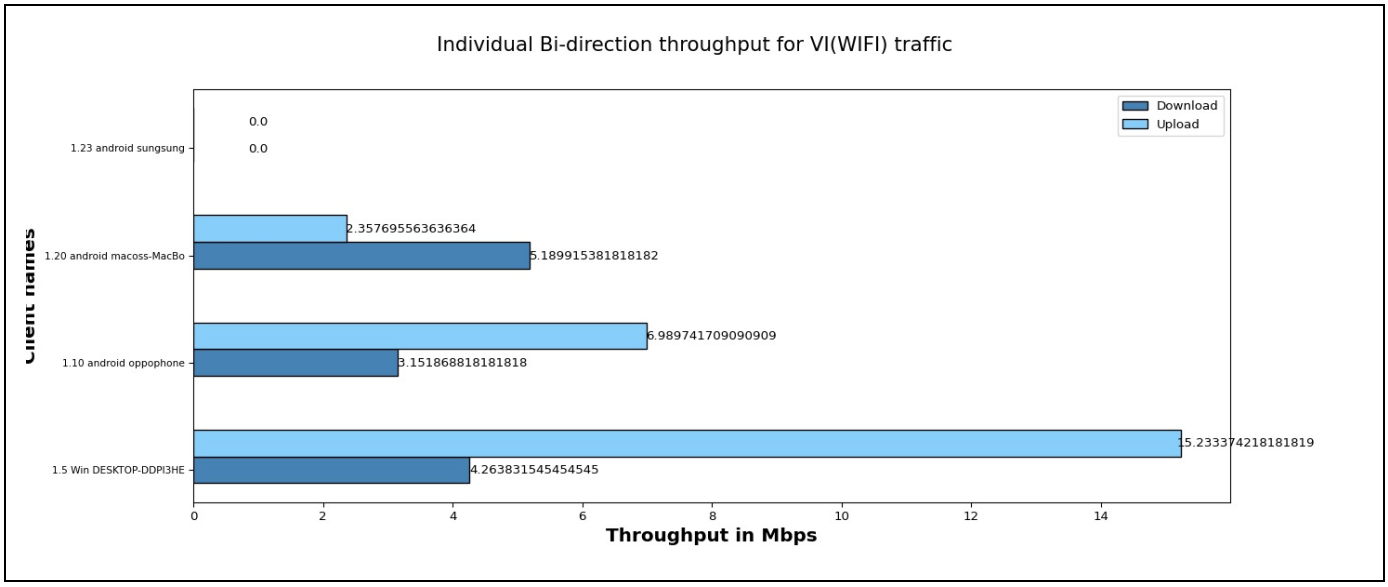

Client Name	MAC	SSID	Type of traffic	Offered upload rate	Offered download rate	Observed average upload rate	Observed average download rate	Observed Upload Drop (%)	Observed Download Drop (%)
1.5 Win DESKTOP-DDPI3HE	e4:a4:71:93:70:e7	NETGEAR_2G_wpa2	Video	100.0 Mbps	100.0 Mbps	15.233374218181819 Mbps	4.263831545454545 Mbps	0.102040	8.481573
1.10 android oppophone	e6:5b:3a:c3:48:ed	NETGEAR_2G_Open	Video	100.0 Mbps	100.0 Mbps	6.989741709090909 Mbps	3.151868818181818 Mbps	0.138014	47.166101
1.20 android macoss-MacBo	30:35:ad:c5:e1:be	NETGEAR_2G_wpa2	Video	100.0 Mbps	100.0 Mbps	2.357695563636364 Mbps	5.189915381818182 Mbps	0.579257	11.644143

1.23 android sungsung	46:ca:12:8c:58:67	NETGEAR_2G_wpa2	Video	100.0 Mbps	100.0 Mbps	0.0 Mbps	0.0 Mbps	0.000000	0.000000

Individual Bi-direction throughput with intended load Upload:100.0 Mbps,Download:100.0 Mbps/station for traffic VO(WiFi).

The below graph represents individual throughput for 4 clients running VO (WiFi) traffic. X- axis shows "number of clients" and Y-axis shows "Throughput in Mbps".

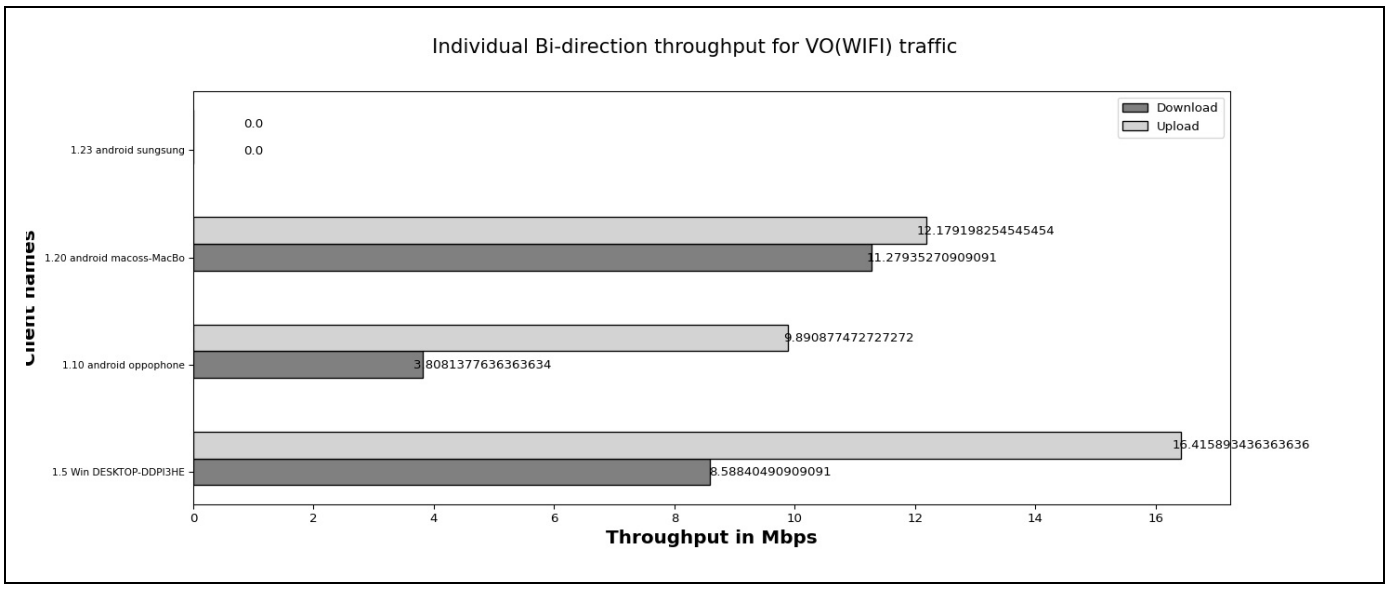

Client Name	MAC	SSID	Type of traffic	Offered upload rate	Offered download rate	Observed average upload rate	Observed average download rate	Observed Upload Drop (%)	Observed Download Drop (%)
1.5 Win DESKTOP-DDPI3HE	e4:a4:71:93:70:e7	NETGEAR_2G_wpa2	Voice	100.0 Mbps	100.0 Mbps	16.415893436363636 Mbps	8.58840490909091 Mbps	0.213221	7.214951
1.10 android oppophone	e6:5b:3a:c3:48:ed	NETGEAR_2G_Open	Voice	100.0 Mbps	100.0 Mbps	9.890877472727272 Mbps	3.8081377636363634 Mbps	4.467763	44.555710
1.20 android macoss-MacBo	30:35:ad:c5:e1:be	NETGEAR_2G_wpa2	Voice	100.0 Mbps	100.0 Mbps	12.179198254545454 Mbps	11.27935270909091 Mbps	1.630540	12.184148
1.23 android sungsung	46:ca:12:8c:58:67	NETGEAR_2G_wpa2	Voice	100.0 Mbps	100.0 Mbps	0.0 Mbps	0.0 Mbps	0.000000	0.000000

Overall Info	contact	support@candelatech.com