

Power Supply


- 3.7V Li-ion Battery
- TP4056 Type-C Charging Module
- VCC = Battery Output (3.0V - 4.2V)

ESP8266 OLED Interface
Wi-Fi Security Tool
Version: 1.0
Designed by: Manoj A N

Educational Purpose Only

Repository:
ESP-Wireless-Security-Tools

© Manoj A N

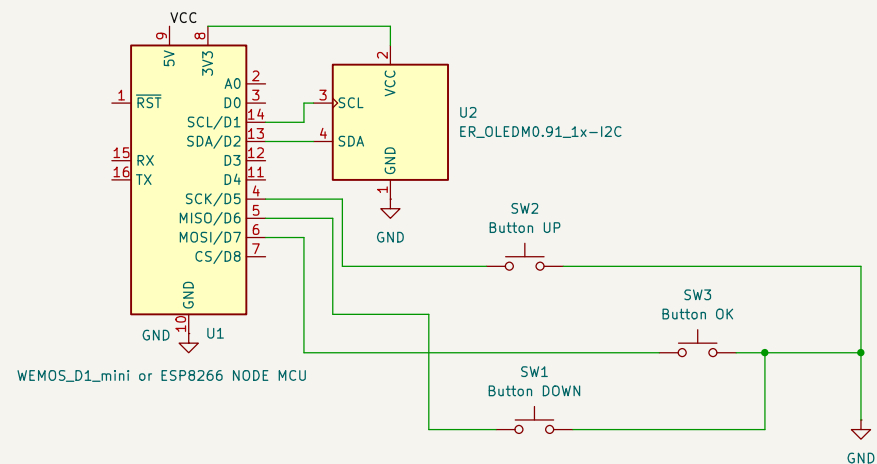

Controller

ESP8266 Wemos D1 Mini

OLED_SCL → D1 (GPIO5)
OLED_SDA → D2 (GPIO4)

BTN_UP → D5 (GPIO14)
BTN_DOWN → D6 (GPIO12)
BTN_OK → D7 (GPIO13)

Button Functions

BTN_UP → Menu Up
BTN_DOWN → Menu Down
BTN_OK → Select / Enter

GitHub: github.com/manojan282006
Author: Manoj A N
ESP8266 NodeMCU + 0.96" OLED Display
Educational & Research Project

MR-BotX

Sheet: /
File: deauther.kicad_sch

Title: deauther

Size: A4 Date: 2026-07-06

KiCad E.D.A. 10.0.4

Rev: v1

Id: 1/1