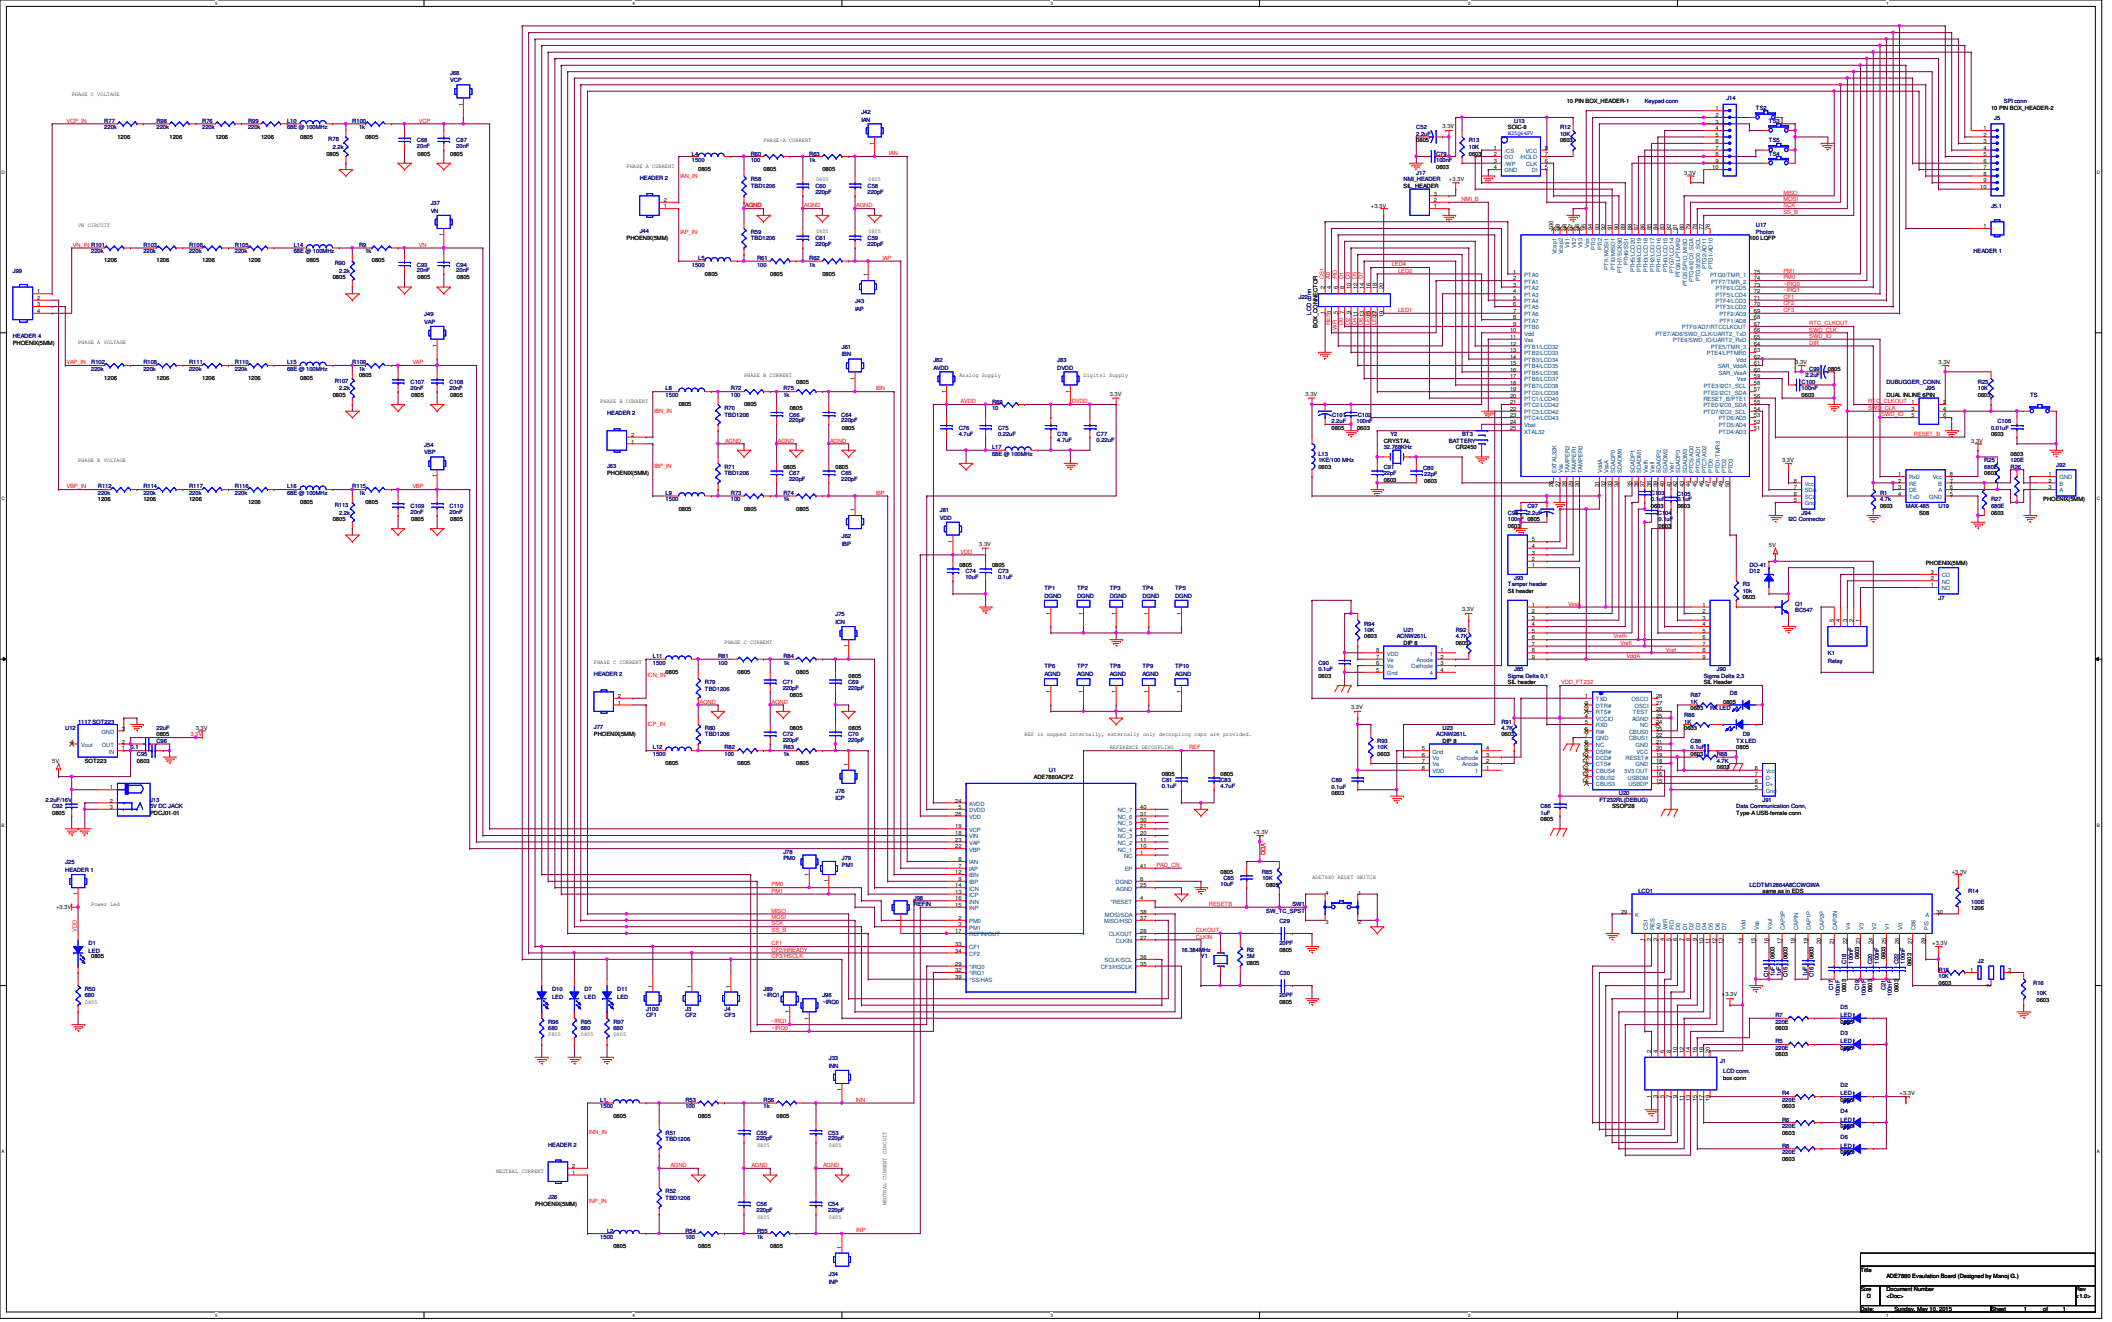
PHASE C VOLTAGE
VN CIRCUIT
PHASE A VOLTAGE
PHASE B VOLTAGE
PHASE A CURRENT
PHASE B CURRENT
PHASE C CURRENT
NEUTRAL CURRENT
NEUTRAL CURRENT CIRCUIT
HEADER 4 PHOENIX(5MM)
PHOENIX(5MM)
HEADER 1
HEADER 2
Analog Supply
Digital Supply
REFERENCE DECOUPLING
REF is mapped internally, externally only decoupling caps are provided.
ADE7880 RESET SWITCH
Power Led
10 PIN BOX_HEADER-1
Keypad conn
SPI conn
10 PIN BOX_HEADER-2
DUBUGGER_CONN.
DUAL INLINE-8PIN
SC Connector
Temper header
S4 header
Sigma Delta 0.1
S4_header
Sigma Delta 2.3
S4_Header
Data Communication Conn.
Type-A USB-female conn
LCD conn.
box conn
Relay
ADE7880 Evaluation Board (Designed by Manoj G.)
Document Number
Sunday, May 10, 2015