Thermo King

R-SERIES: RLF

SOP 2024

Specifications

Weight – 986 lbs.

Length - 144”

Width - 66”

Height – 22”

300 North Pacific Coast Hwy Suite #1060
El Segundo, CA, 90245

Section 1: Unit Overview

Front View Collapsed

Side View Collapsed

Top View Collapsed

Open View – By Component

The RLF Crate has four [4] individual components that make up a complete unit in RMS. A complete RLF Crate consists of the following:

- [1] R-Series-Base-RLF
- [3] R-Series-Bars-RLF

The right and left gates are attached to the base and considered supporting hardware for the base (not recorded as a separate component in RMS).

** Note- RLF Crates cannot be stored, loaded, or received in this status, but always must be collapsed. **

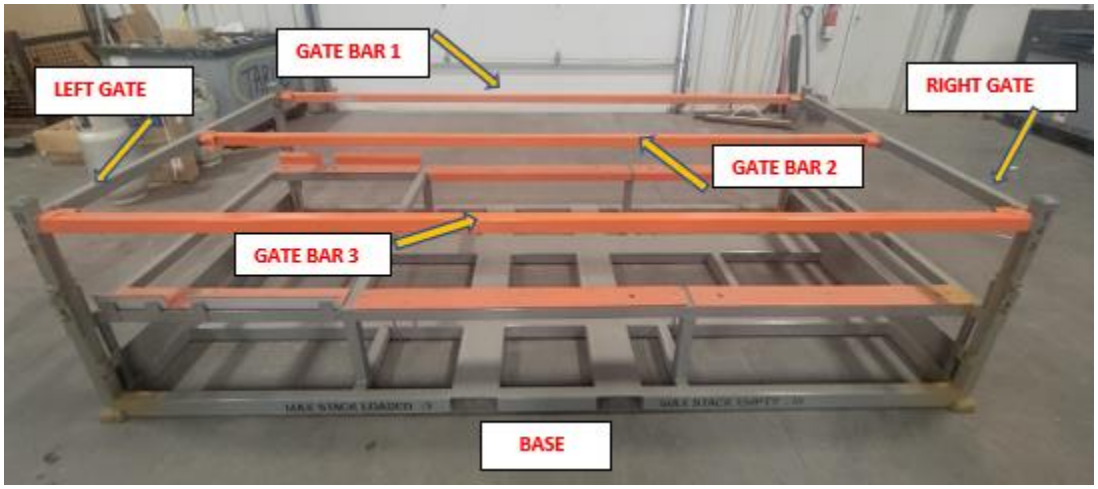

How to Collapse an RLF Crate

To view the video, please click the below play icon.

20221201_142425.mp4

Section 2: Provider Count Expectations

EZRack contracted warehouse locations are expected to perform the following function:

Receiving Count and RMS System Inventory Management:

- Upon product arrival to the warehouse, the units are to be counted and verified against the BOL quantities and any OS&D exceptions noted on the physical BOL.
- Provider is expected to log into RMS in real time to take the following actions:
  - Complete BOL with actual quantities in WIP received.
  - Add any additional SKUs to BOL with quantities in WIP received, if applicable, to match total quantities received from the shipment.

Section 3: Recovery, Shipping and Receiving

IMPORTANT PICK UP NOTE:

Providers must call TK Dealer location to schedule a pickup appointment prior to dispatching a driver for recovery.

<u>RLF Crates loaded quantities into a 26’ Box Truck</u>

- Max stack height is 4 RLF units, collapsed.
- 8 units max can be loaded into a 26’ Box Truck.
- Ensure all gates and bars are closed and are attached properly.
  ** See Video **
- RLF crates cannot be loaded in any other configuration than the collapsed stage as seen in the picture.

RLF Crates loaded quantities into a 53’ Dry Van/ 48’ Flatbed

- Max stack height is 4 RLF units, collapsed.
- 16 units max can be loaded into a 53’Van/ 48’ Flatbed.
- Ensure all gates and bars are closed and are attached properly.
  ** See Video **
- RLF crate cannot be loaded in any other configuration than the collapsed stage as seen in the picture.

IMPORTANT LOADING NOTE:

*****DO NOT LOAD VERTICALLY.**

NEVER LOAD ON TOP OF ANY OTHER TYPES OF TK UNITS.

ONLY THE SAME TYPES OF UNITS CAN BE STACKED ON EACH OTHER. DO NOT STACK MIXED UNITS TOGETHER. EACH TYPE OF UNIT MUST BE IN ITS OWN STACK.***

Section 4: Storage
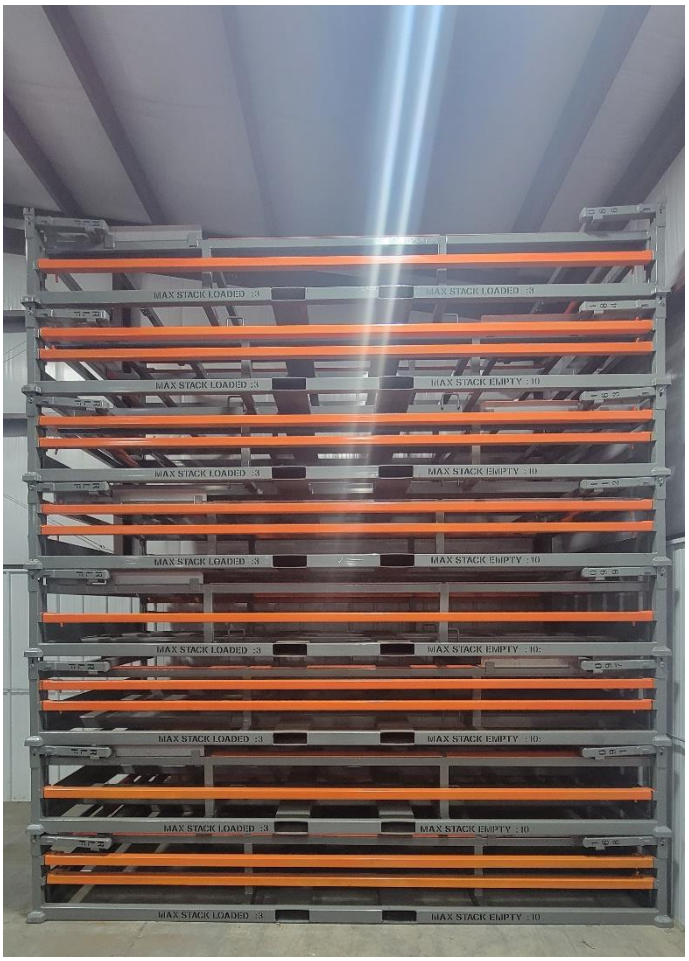
- Empty RLF crates can be stored up to 8 units high, all collapsed.
- An RLF unit will fill 3 pallet positions of floor space.
- Both gates and 3 bars of the RLF unit must be in the closed position to stack for storage.