Thermo-King

R-Series: R2E/TE

SOP 2024

(Also known as R2E or R2E/TE 18)

Specifications

Weight – 646 lbs.

Length - 62”

Width - 74”

Height – 23”

300 North Pacific Coast Hwy Suite #1060
El Segundo, CA, 90245

Section 1: Unit Overview

Front View Collapsed

Side View Collapsed

Top View Collapsed

Open View – By Component

The R2E/TE crate has four (4) individual components that make up a complete unit in RMS. A complete R2E/TE crate consists of the following:

- [1] R-Series-Base-R2E/TE
  (attached front and rear gates are removeable but considered supporting hardware for the base and not recorded in RMS)
- [3] R-Series - Bars-R2E/TE

** Note- R2E/TE Crates cannot be stored, loaded, or received in this status, but always must be collapsed.**

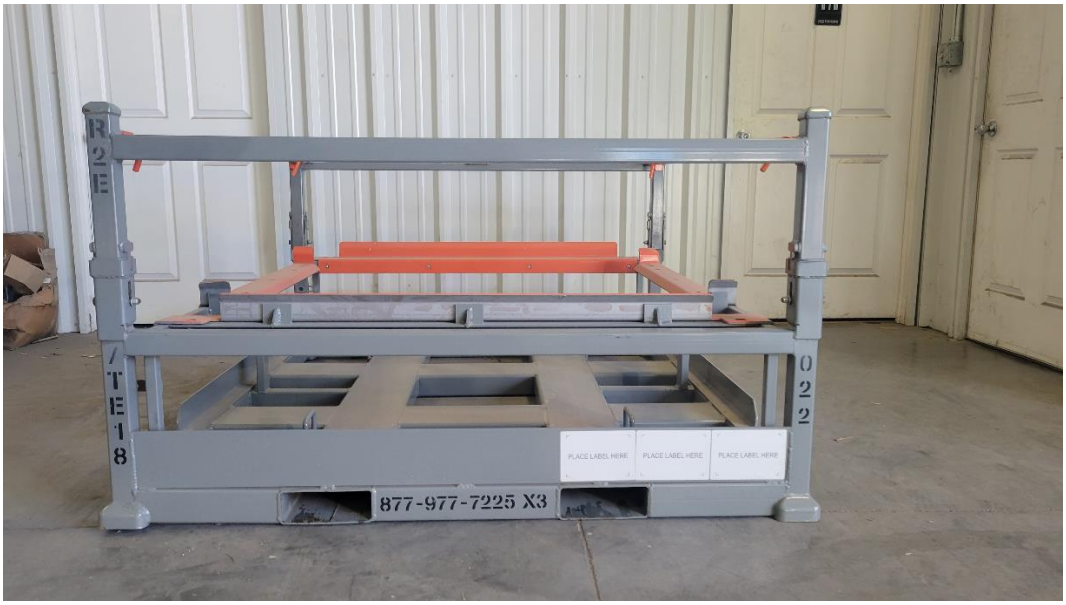

How to Collapse a R2E/TE-Series Crate

To view the video, please click the below play icon.

20221206_125351.mp4

Section 2: Provider Count Expectations

EZRack contracted warehouse locations are expected to perform the following function:

Receiving Count and RMS System Inventory Management:

- Upon product arrival to the warehouse, the units are to be counted and verified against the BOL quantities and any OS&D exceptions noted on the physical BOL.
- Provider is expected to log into RMS in real time to take the following actions:
  - Complete BOL with actual quantities in WIP received.
  - Add any additional SKUs to BOL with quantities in WIP received, if applicable, to match total quantities received from the shipment.

Section 3: Recovery, Shipping and Receiving

IMPORTANT PICK UP NOTE:

Providers must call TK Dealer location to schedule a pickup appointment prior to dispatching a driver for recovery.

R2E-TE Series Crates loading quantities in a 26' Box Truck

- Max stack height is 4 units, collapsed.
- 16 units max can be loaded on a 26' Box truck.
- All gates and bars must be closed and attached properly.
  ** See Video **
- R2E-TE-Series cannot be loaded in any other configuration than
  the collapsed stage as seen in the picture.

R2E-TE-Series Crates loading quantities in a 53' Dry Van

- Max stack height is 4 units, collapsed.
- 40 units max can be loaded on a 53’ Dry Van.
- All gates and bars must be closed and attached properly.
  ** See Video **
- R2E-TE units cannot be loaded in any other configuration than
  the collapsed stage as seen in the picture.

IMPORTANT LOADING NOTE:

*****DO NOT LOAD VERTICALLY.**

NEVER LOAD ON TOP OF ANY OTHER TYPES OF TK UNITS.

ONLY THE SAME TYPES OF UNITS CAN BE STACKED ON EACH OTHER. DO NOT STACK MIXED UNITS TOGETHER. EACH TYPE OF UNIT MUST BE IN ITS OWN STACK.***

Section 4: Storage

- R2E-TE Series crates can be stored up to 6 units high, all collapsed.
- A R2E-TE unit will fill pallet positions of floor space.
- Both gates and 3 bars of the R2E-TE unit must be in the closed position to stack for storage.