Thermo King

SP Crate

(Also known as Large Truck Crate)

SOP 2024

Specifications

Weight: 519 lbs

Length: 78”

Width: 82”

Heights: 15”

300 North Pacific Coast Hwy Suite #1060
El Segundo, CA, 90245

Section 1: Unit Overview

Front View Collapsed

Side View Collapsed

Open View – By Component

SP Crate has three [3] individual components that make up a complete unit in RMS. A complete SP Crate consists of the following:

- [1] SP Truck Base
- [1] SP Truck L Upright BK
- [1] SP Truck R Upright GN

The gates are attached to the base and considered supporting hardware for the base (not recorded as a separate component in RMS).

** Note- SP Crates cannot be stored, loaded, or received in this status, but always must be collapsed. **

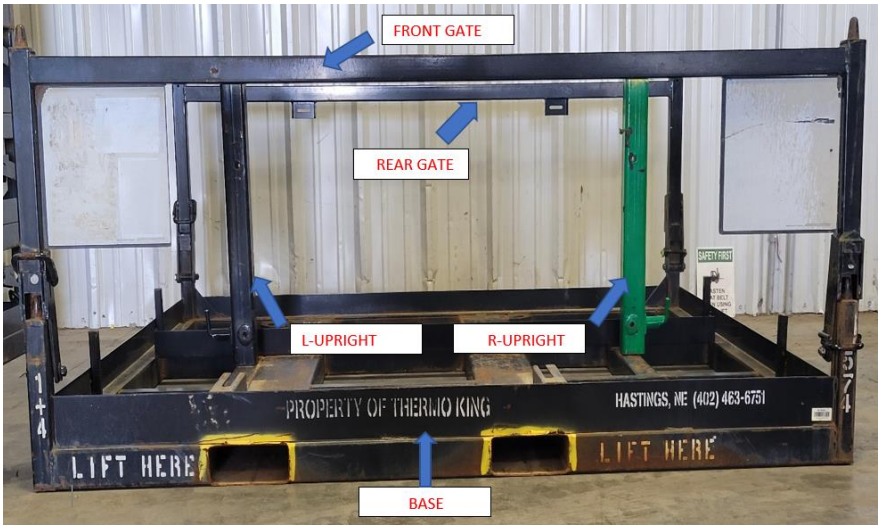

Unit Inspection:

Each complete SP Crate Unit has 1 Base, 1 Left Black Upright and 1 Right Green Upright. Be sure to report the correct count of each individual component when receiving into inventory or shipping outbound (RMS). In each stack, visually check for the **Left Black Upright** bar and the **Right Green Upright** bar attached to each crate base.

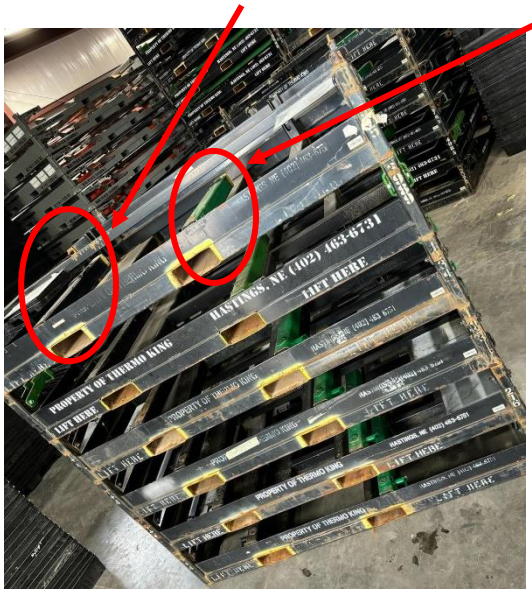

IF ONE OR BOTH UPRIGHTS ARE MISSING, THE COMPONENT QUANTITY IN RMS MUST BE ADJUSTED TO THE CORRECT QUANTITY RECEIVED AND/OR SHIPPED.

Visual of Individual L Upright BK and R Upright GN

How to Collapse a SP Crate

To view the video, please click the below play icon.

20221108_074332001.mp4

Section 2: Provider Count Expectations

EZRack contracted warehouse locations are expected to perform the following function:

Receiving Count and RMS System Inventory Management:

- Upon product arrival to the warehouse, the units are to be counted and verified against the BOL quantities and any OS&D exceptions noted on the physical BOL.
- Provider is expected to log into RMS in real time to take the following actions:
    - Complete BOL with actual quantities in WIP received.
    - Add any additional SKUs to BOL with quantities in WIP received, if applicable, to match total quantities received from the shipment.

Section 3: Recovery, Shipping and Receiving

IMPORTANT PICK-UP NOTE:

Providers must call TK Dealer location to schedule a pickup appointment prior to dispatching a driver for recovery.

SP Crates loaded into a 26' Box Truck

- Max stack height of 6 SP Crates, collapsed.
- 18 units max can be loaded into a 26' Box Truck.
- Ensure all uprights (Left and Right) are attached properly.
  ** See Video **
- SP Crates cannot be loaded in any other configuration than the collapsed stage as seen in the picture.

SP Crates loaded into a 53' Dry Van or Reefer Trailer

- Max stack height of 6 SP Crates, collapsed.
- 48 units max can be loaded into a 53' Trailer.
- Ensure all uprights (Left and Right) are attached properly.
  ** See Video **
- SP Crates cannot be loaded in any other configuration than the collapsed stage as seen in the picture.

IMPORTANT LOADING NOTE:

*****DO NOT LOAD VERTICALLY.**

NEVER LOAD ON TOP OF ANY OTHER TYPES OF TK UNITS.

ONLY THE SAME TYPES OF UNITS CAN BE STACKED ON EACH OTHER. DO NOT STACK MIXED UNITS TOGETHER. EACH TYPE OF UNIT MUST BE IN ITS OWN STACK.***

Section 4: Storage

- SP Crates can be stored up to 12 units high, all collapsed.
- A SP Crate will fill 4 pallet positions of floor space.
- Ensure all uprights (Left and Right) are attached properly. ** See Video **
- SP Crates cannot be stored in any other configuration than the collapsed stage as shown.
- Do not stack crates any higher than 12 for storage.