



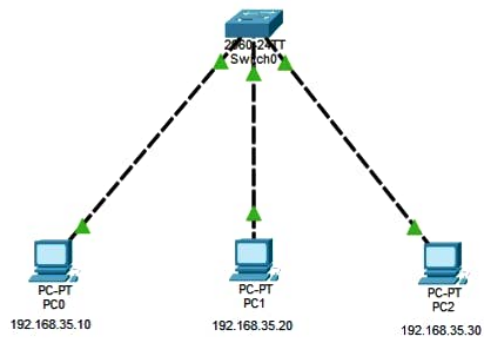

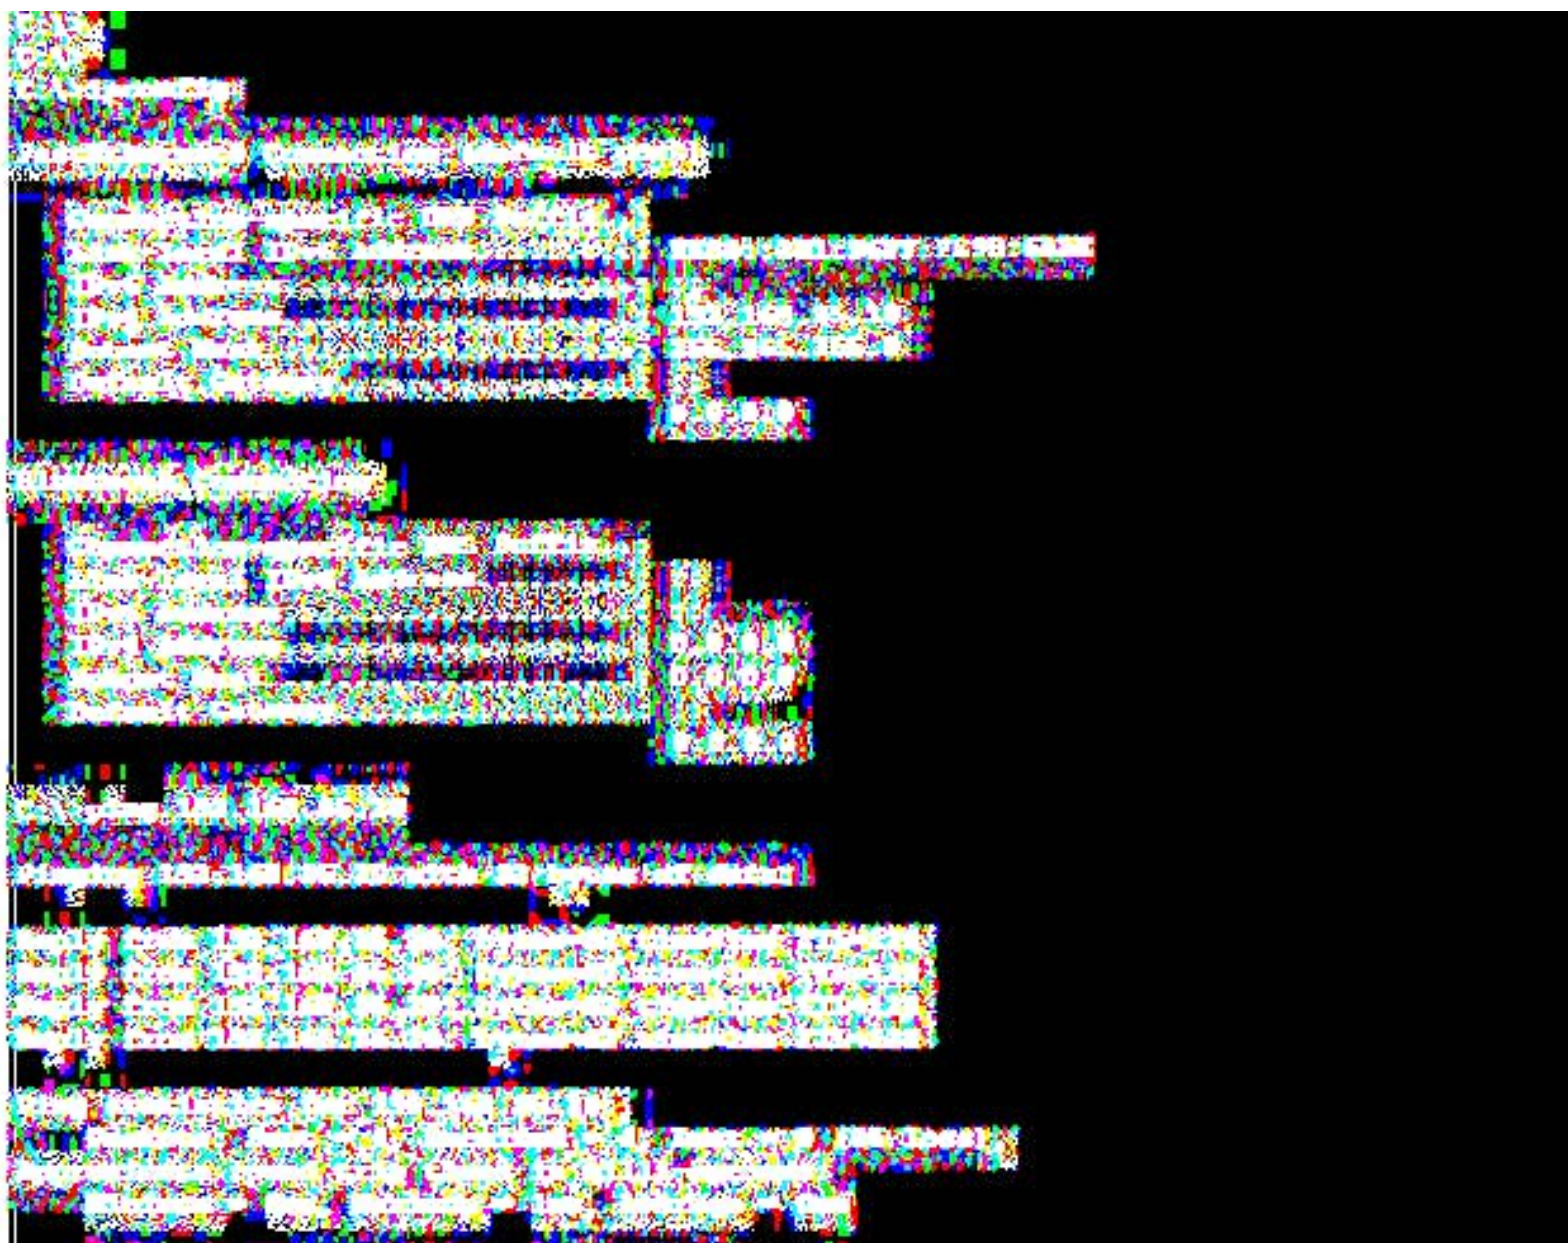

PC0

Physical Config Desktop Programming Attributes

Command Prompt

X

FastEthernet0 Connection: (default port)

```
Connection-specific DNS Suffix...:
Link-local IPv6 Address . . . . .: FE80::201:96FF:FE9B:6AAE
IPv6 Address . . . . .: ::
IPv4 Address . . . . .: 192.168.35.10
Subnet Mask . . . . .: 255.255.255.0
Default Gateway . . . . .: ::
                                0.0.0.0
```

Bluetooth Connection:

```
Connection-specific DNS Suffix...:
Link-local IPv6 Address . . . . .: ::
IPv6 Address . . . . .: ::
IPv4 Address . . . . .: 0.0.0.0
Subnet Mask . . . . .: 0.0.0.0
Default Gateway . . . . .: ::
                                0.0.0.0
```

C:\>ping 192.168.35.20

Pinging 192.168.35.20 with 32 bytes of data:

```
Reply from 192.168.35.20: bytes=32 time<1ms TTL=128
Reply from 192.168.35.20: bytes=32 time<1ms TTL=128
Reply from 192.168.35.20: bytes=32 time=1ms TTL=128
Reply from 192.168.35.20: bytes=32 time=1ms TTL=128
```

Ping statistics for 192.168.35.20:

```
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms
```

C:\>ping 192.168.35.30

Pinging 192.168.35.30 with 32 bytes of data:

```
Reply from 192.168.35.30: bytes=32 time=285ms TTL=128
Reply from 192.168.35.30: bytes=32 time<1ms TTL=128
Reply from 192.168.35.30: bytes=32 time=1ms TTL=128
Reply from 192.168.35.30: bytes=32 time<1ms TTL=128
```

Command Prompt

FastEthernet0 Connection: (default port)

```
Connection-specific DNS Suffix...:
Link-local IPv6 Address . . . . .: FE80::202:16FF:FEBC:8BA4
IPv6 Address . . . . .: ::
IPv4 Address . . . . .: 192.168.35.20
Subnet Mask . . . . .: 255.255.255.0
Default Gateway . . . . .: ::
                        0.0.0.0
```

Bluetooth Connection:

```
Connection-specific DNS Suffix...:
Link-local IPv6 Address . . . . .: ::
IPv6 Address . . . . .: ::
IPv4 Address . . . . .: 0.0.0.0
Subnet Mask . . . . .: 0.0.0.0
Default Gateway . . . . .: ::
                        0.0.0.0
```

C:\>ping 192.168.35.10

Pinging 192.168.35.10 with 32 bytes of data:

```
Reply from 192.168.35.10: bytes=32 time<1ms TTL=128
Reply from 192.168.35.10: bytes=32 time=3ms TTL=128
Reply from 192.168.35.10: bytes=32 time=5ms TTL=128
Reply from 192.168.35.10: bytes=32 time<1ms TTL=128
```

Ping statistics for 192.168.35.10:

```
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 5ms, Average = 2ms
```

C:\>ping 192.168.35.30

Pinging 192.168.35.30 with 32 bytes of data:

```
Reply from 192.168.35.30: bytes=32 time<1ms TTL=128
Reply from 192.168.35.30: bytes=32 time<1ms TTL=128
Reply from 192.168.35.30: bytes=32 time<1ms TTL=128
Reply from 192.168.35.30: bytes=32 time<1ms TTL=128
```


Command Prompt

```
FastEthernet0 Connection: (default port)

Connection-specific DNS Suffix...:
Link-local IPv6 Address . . . . .: FE80::2D0:BAFF:FEE6:43A
IPv6 Address . . . . .: ::
IPv4 Address . . . . .: 192.168.35.30
Subnet Mask . . . . .: 255.255.255.0
Default Gateway . . . . .: ::
                                0.0.0.0

Bluetooth Connection:

Connection-specific DNS Suffix...:
Link-local IPv6 Address . . . . .: ::
IPv6 Address . . . . .: ::
IPv4 Address . . . . .: 0.0.0.0
Subnet Mask . . . . .: 0.0.0.0
Default Gateway . . . . .: ::
                                0.0.0.0

C:\>ping 192.168.35.10

Pinging 192.168.35.10 with 32 bytes of data:

Reply from 192.168.35.10: bytes=32 time<1ms TTL=128
Reply from 192.168.35.10: bytes=32 time<1ms TTL=128
Reply from 192.168.35.10: bytes=32 time<1ms TTL=128
Reply from 192.168.35.10: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.35.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping 192.168.35.20

Pinging 192.168.35.20 with 32 bytes of data:

Reply from 192.168.35.20: bytes=32 time<1ms TTL=128
Reply from 192.168.35.20: bytes=32 time<1ms TTL=128
Reply from 192.168.35.20: bytes=32 time<1ms TTL=128
Reply from 192.168.35.20: bytes=32 time=1ms TTL=128
```