


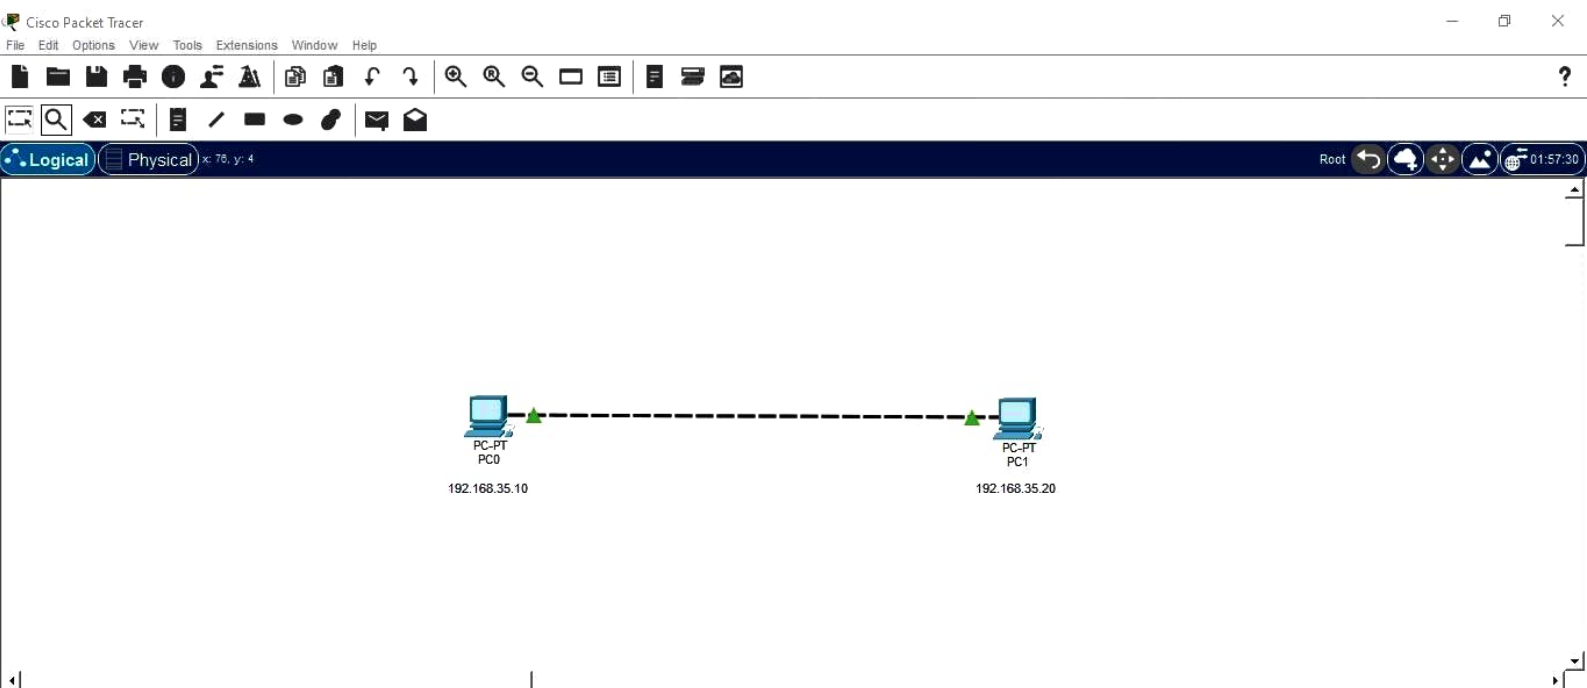

Command Prompt

Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ipconfig

FastEthernet0 Connection: (default port)

Connection-specific DNS Suffix...:
Link-local IPv6 Address.....: FE80::201:96FF:FE9B:6AAE
IPv6 Address.....: ::
IPv4 Address.....: 192.168.35.10
Subnet Mask.....: 255.255.255.0
Default Gateway.....: ::
0.0.0.0

Bluetooth Connection:

Connection-specific DNS Suffix...:
Link-local IPv6 Address.....: ::
IPv6 Address.....: ::
IPv4 Address.....: 0.0.0.0
Subnet Mask.....: 0.0.0.0
Default Gateway.....: ::
0.0.0.0



PC1

Physical Config Desktop Programming Attributes

Command Prompt

X

Cisco Packet Tracer PC Command Line 1.0

C:\>ipconfig

FastEthernet0 Connection: (default port)

Connection-specific DNS Suffix...:

Link-local IPv6 Address.....: FE80::202:16FF:FEBC:8BA4

IPv6 Address.....: ::

IPv4 Address.....: 192.168.35.20

Subnet Mask.....: 255.255.255.0

Default Gateway.....: ::

0.0.0.0

Bluetooth Connection:

Connection-specific DNS Suffix...:

Link-local IPv6 Address.....: ::

IPv6 Address.....: ::

IPv4 Address.....: 0.0.0.0

Subnet Mask.....: 0.0.0.0

Default Gateway.....: ::

0.0.0.0

C:\>ping 192.168.35.10 -t

Invalid Command.

C:\>ping 192.168.35.10

Pinging 192.168.35.10 with 32 bytes of data:

Reply from 192.168.35.10: bytes=32 time<1ms TTL=128

Reply from 192.168.35.10: bytes=32 time<1ms TTL=128

Reply from 192.168.35.10: bytes=32 time<1ms TTL=128

Reply from 192.168.35.10: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.35.10:

Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),

Approximate round trip times in milli-seconds:

Minimum = 0ms, Maximum = 0ms, Average = 0ms