

VIEW 01 PLAN VIEW · SECTION A-A Ordinate dims from G54 datum · mm

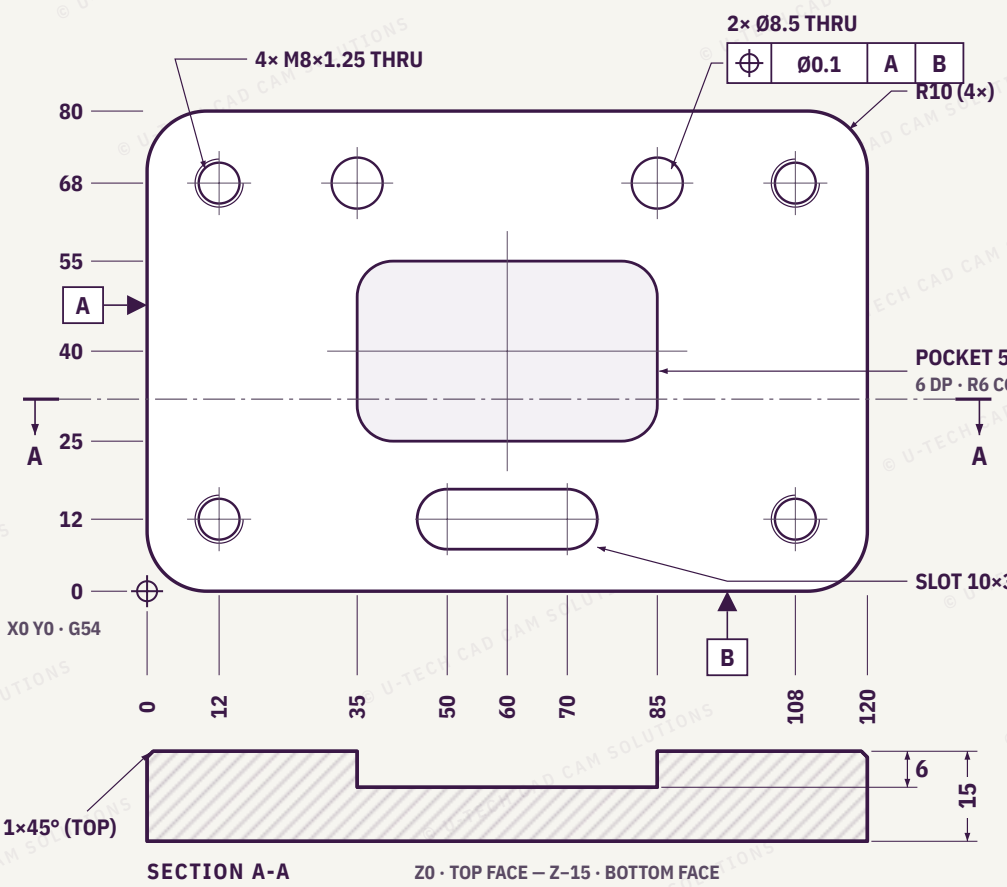

VIEW 02 ISOMETRIC
Rendered · not to scale

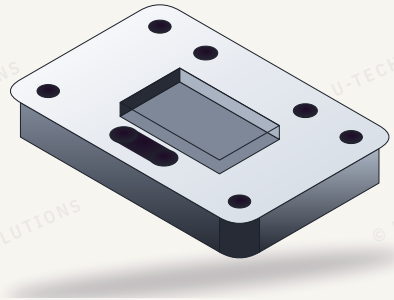

SETUP · G54

X0 Y0 — bottom-left corner of plate
Z0 — top face, after facing
Work holding — vice on parallels, stop on left
Program — G90 G54 G17 G40 G80 · absolute
Contour — G41 climb, Ø12 EM, 2 passes

GENERAL NOTES

01 Material: AL 6061-T6, stock 125 × 85 × 18.
02 All dimensions in mm, from datum X0 Y0.
03 Untoleranced dimensions: ISO 2768-mK.
04 Break edges 0.2×45°; 1×45° on top edge only.
05 G54: X0 Y0 bottom-left corner, Z0 top face.
06 Contour: G41 climb, Ø12 EM, finish pass 0.3.
07 Pocket: rough Ø12, finish Ø8, two depth steps.
08 M8: Ø6.8 drill G83, rigid tap G84, deburr.
09 Slot: Ø8 EM, ramp entry 3°, through in 2 passes.

FEATURE TABLE

G54 · mm

ID	X	Y	FEATURE	Z
H1	12	12	M8×1.25	THRU
H2	108	12	M8×1.25	THRU
H3	12	68	M8×1.25	THRU
H4	108	68	M8×1.25	THRU
H5	35	68	Ø8.5 H13	THRU
H6	85	68	Ø8.5 H13	THRU
S1	60	12	SLOT 10×30	THRU
P1	60	40	PKT 50×30 R6	−6

U-TECH
CAD CAM SOLUTIONS
SHAPING SKILLS · BUILDING FUTURE
ISO 9001:2015 CERTIFIED
www.u-tech.in
WhatsApp +91 93094 30169

TITLE

2D MILLING PLATE

DRG. NO. UTCCS-VMC-M-003	SHEET 1 / 1
MATERIAL AL 6061-T6	STOCK 125 × 85 × 18
SCALE NTS · UNIT mm	PROJECTION 1st angle
GENERAL TOL. ISO 2768-mK	SURFACE Ra 3.2 (√)

LIMITS OF SIZE

FEATURE	FIT	UPPER	LOWER
PKT 50×30	—	+0.050	0.000
Ø8.5	H13	+0.220	0.000
THK 15	—	+0.050	−0.050

REQUIRED TOOLING

VMC · 3-AXIS

T01	Face top	Ø50 face mill
T02	Contour G41 · pocket rough	Ø12 end mill
T03	Slot · pocket finish	Ø8 end mill
T04	Spot all holes	Ø6 spot 90°
T05	Tap drill G83	Ø6.8 drill
T06	Rigid tap G84	M8×1.25 tap
T07	Through holes G81	Ø8.5 drill

CONFIDENTIAL

© 2026 U-Tech CAD CAM Solutions. Not to be copied without written permission.
www.u-tech.in · WhatsApp +91 93094 30169