

VIEW 01 **SECTION A-A · END VIEW** Scale NTS · dimensions in mm

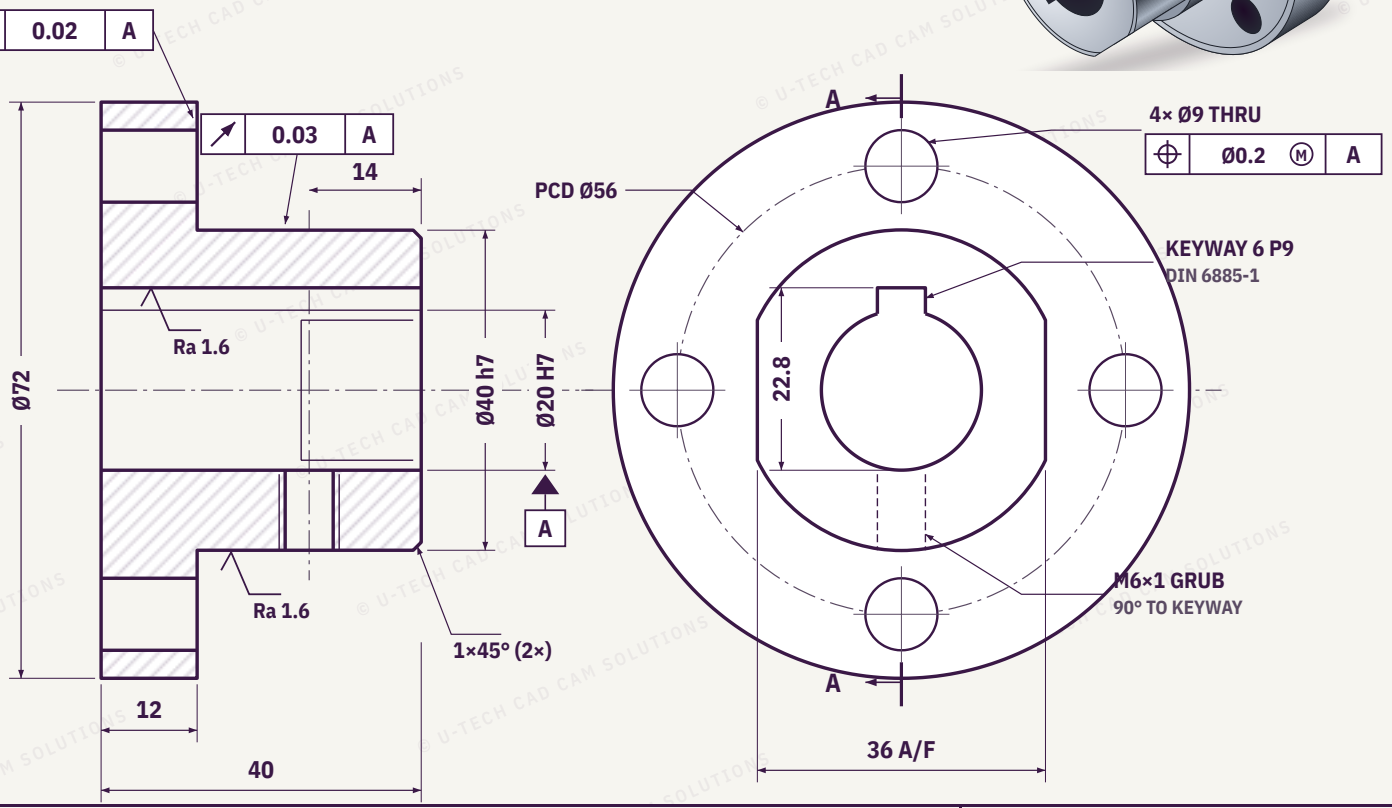

VIEW 02 **ISOMETRIC**
Rendered · not to scale

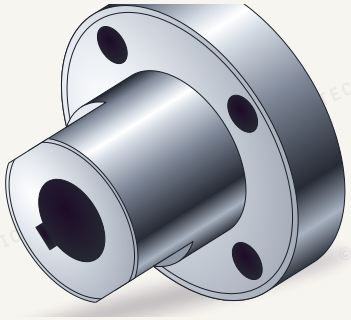

GENERAL NOTES

01 Material: SS 304 bright bar, Ø75 × 45 lg.

02 All dimensions are in millimetres.

03 Untoleranced dimensions: ISO 2768-mK.

04 Break all sharp edges 0.2×45° max.

05 4× Ø9 holes on Ø56 PCD, C-axis live drilled in one setting.

06 Keyway 6 P9 × 22.8 to DIN 6885-1, Y-axis slotted.


07 Flats 36 A/F × 15 lg, live-tool milled, 90° to holes.

08 M6×1 grub hole 14 from hub end, 90° to keyway.

09 Ra 1.6 µm on Ø40 h7 and Ø20 H7; all else Ra 3.2.

DETAIL B

KEYWAY · 5:1



U-TECH
CAD CAM SOLUTIONS
SHAPING SKILLS · BUILDING FUTURE
ISO 9001:2015 CERTIFIED
www.u-tech.in
WhatsApp +91 93094 30169

TITLE

FLANGED HUB

DRG. NO. UTCCS-TM-L-002	SHEET 1 / 1
MATERIAL SS 304	STOCK Ø75 × 45
SCALE NTS · UNIT mm	PROJECTION 1st angle
GENERAL TOL. ISO 2768-mK	SURFACE Ra 3.2 (√)

LIMITS OF SIZE

FEATURE	FIT	UPPER	LOWER
Ø40	h7	0.000	−0.025
Ø20	H7	+0.021	0.000
Key 6	P9	−0.012	−0.042

REQUIRED TOOLING

TURN-MILL · C/Y AXIS

T01	Face & OD rough	CNMG 120408
T02	OD / face finish	DNMG 150604
T03	Bore Ø20 H7	Ø19 drill + bar
T04	Live drill 4× Ø9	Ø9 carbide
T05	Live mill flats	Ø10 end mill
T06	M6 tap · keyway	tap + slot cutter

Gauges: Ø20 H7 plug · 25–50 micrometer · 36 A/F caliper

CONFIDENTIAL

© 2026 U-Tech CAD CAM Solutions. Not to be copied without written permission.
www.u-tech.in · WhatsApp +91 93094 30169