

VIEW 01 **FRONT ELEVATION** Scale NTS · dimensions in mm

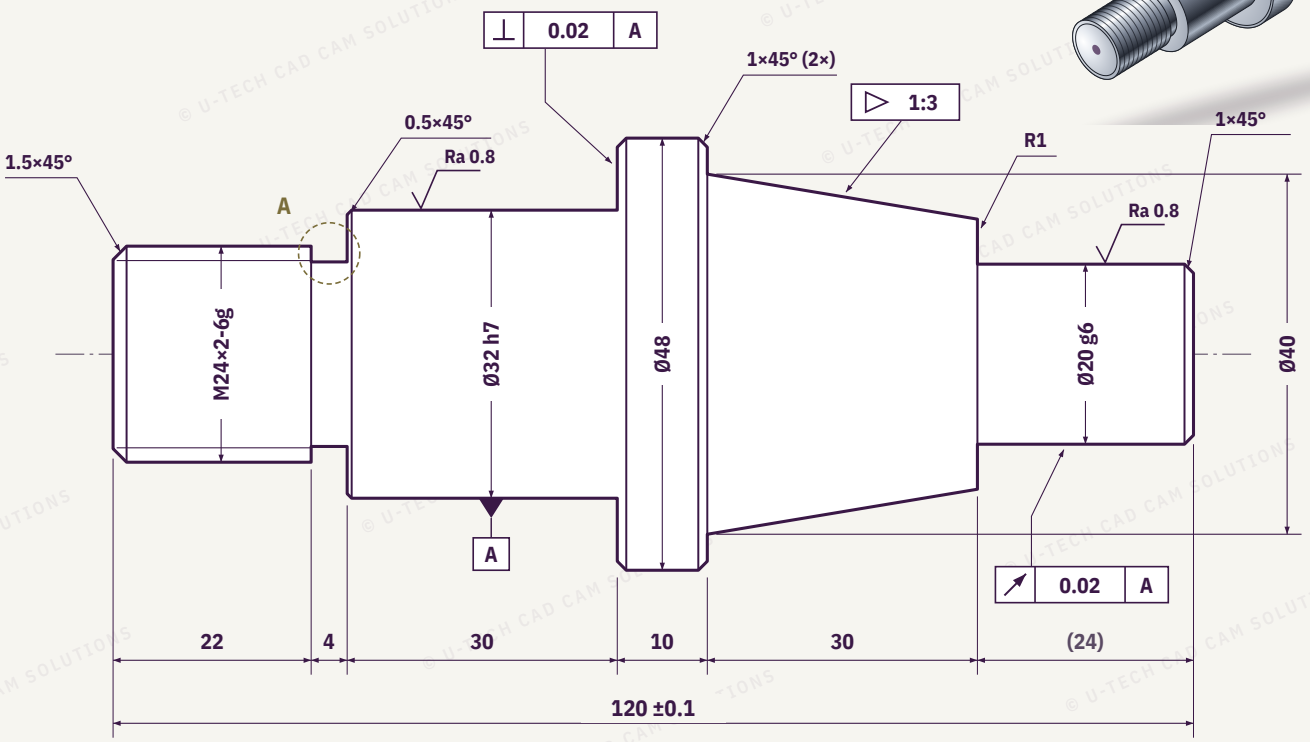

VIEW 02 **ISOMETRIC**
Rendered · not to scale



GENERAL NOTES

01 Material: EN8 (080M40) bright bar, Ø50 × 125 lg.

02 All dimensions are in millimetres.

03 Untoleranced dimensions: ISO 2768-mK.

04 Break all sharp edges 0.2×45° max.

05 Thread M24×2-6g; undercut as per Detail A.

06 Taper 1:3 — check with ring gauge, ≥80% contact.


07 Ra 0.8 µm on Ø32 h7 and Ø20 g6.

08 Centre holes A2.5 permitted both ends.

09 Included taper angle 18°55′ (ref.).

DETAIL A

SCALE 5:1

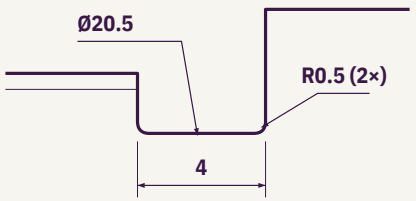

U-TECH CAD CAM SOLUTIONS
SHAPING SKILLS · BUILDING FUTURE
ISO 9001:2015 CERTIFIED
www.u-tech.in
WhatsApp +91 93094 30169

TITLE

STEPPED TAPER SHAFT

DRG. NO. UTCCS-CNC-L-001	SHEET 1 / 1
MATERIAL SS 304	STOCK Ø50 × 125
SCALE NTS · UNIT mm	PROJECTION 1st angle
GENERAL TOL. ISO 2768-mK	SURFACE Ra 3.2 (√)

LIMITS OF SIZE

FEATURE	FIT	UPPER	LOWER
Ø32	h7	0.000	−0.025
Ø20	g6	−0.007	−0.020
L 120	—	+0.100	−0.100

REQUIRED TOOLING

CNC LATHE

T01	OD rough turn	CNMG 120408
T02	OD finish / taper	VNMG 160404
T03	Undercut groove	3 mm groove
T04	Thread M24×2	16ER 2.0 ISO
T05	Centre drill	A2.5 HSS
T06	Face & part-off	3 mm blade

Gauges: M24×2-6g ring · 1:3 taper ring · 25–50 micrometer

CONFIDENTIAL

© 2026 U-Tech CAD CAM Solutions. Not to be copied without written permission.
www.u-tech.in · WhatsApp +91 93094 30169