

POWER IN: 5 V from terminal J1 or USB-C J2 (data: D+ IO20, D- IO19) -> AMS1117-3.3 LDO

3V3A = 3.3 V buffered mid-point shared by all CT channels (MCP6002 unit A)


U2 ESP32-S3-WROOM-1U-N16R8 module (U.FL antenna) + LDO, USB-C data, RESET/BOOT, UART

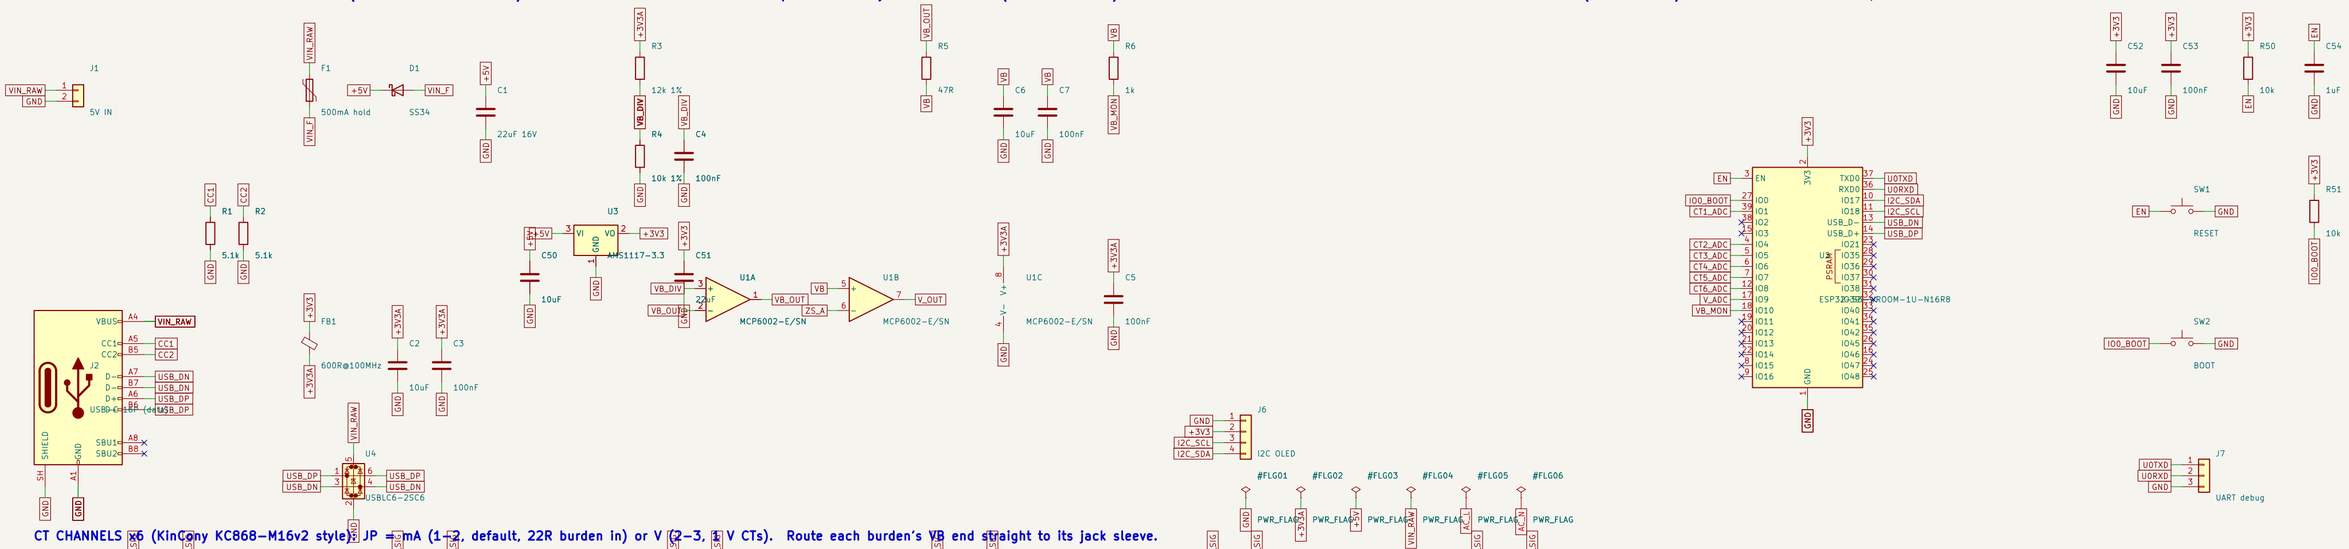


CT CHANNELS x6 (KinCony KC868-M16v2 style) JP = mA (1-2, default, 22R burden in) or V (2-3, 1 V CTs). Route each burden's VB end straight to its jack sleeve.

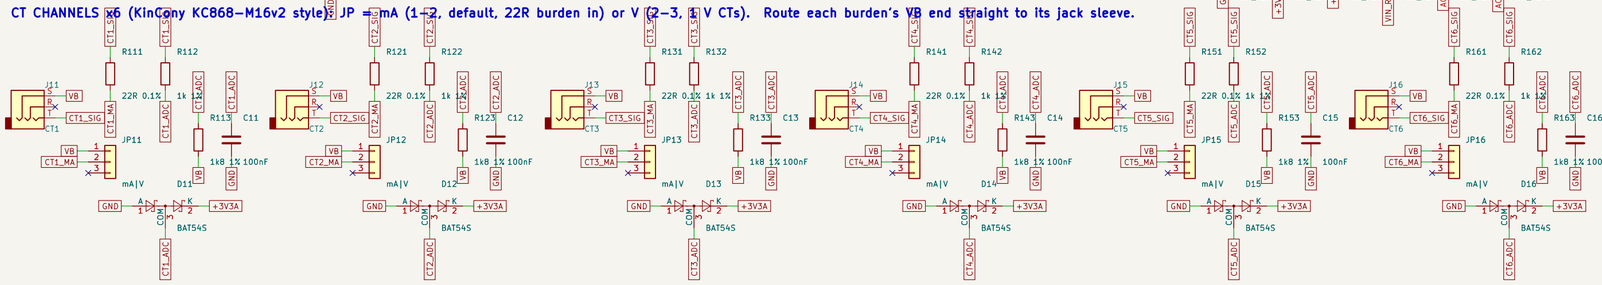


!! MAINS 230 V SECTION — keep >= 6.5 mm creepage to everything else (see .kicad_dru) !!

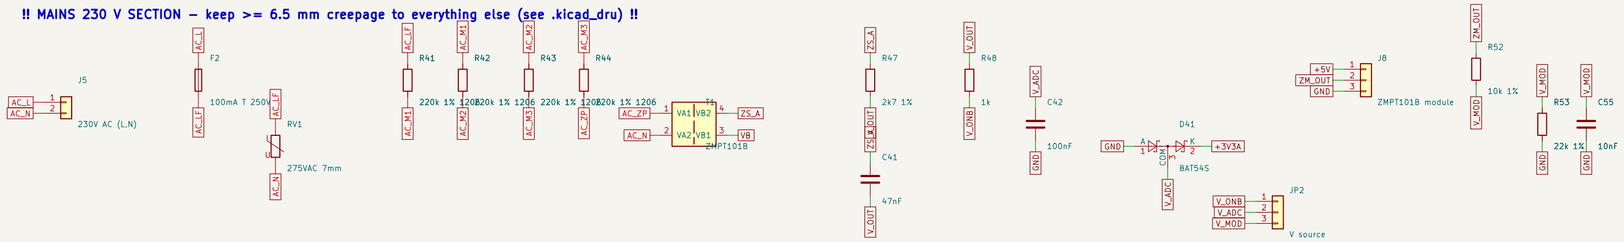





Generated by hardware/generate_kicad.py — edit the script, not this file

**ElectroIoT**

Sheet: /

File: ct6-energy-monitor-v02.kicad_sch

***Title: CT6 Energy Monitor v0.2 — ESP32-S3-WROOM-1U + 6 CT + ZMPT101***

| | | |
|---|---|---|
| Size: A2 | Date: 2026-09-24 | **Rev: 0.2** |
| KiCad E.D.A. 10.0.6 | | Id: 1/1 |