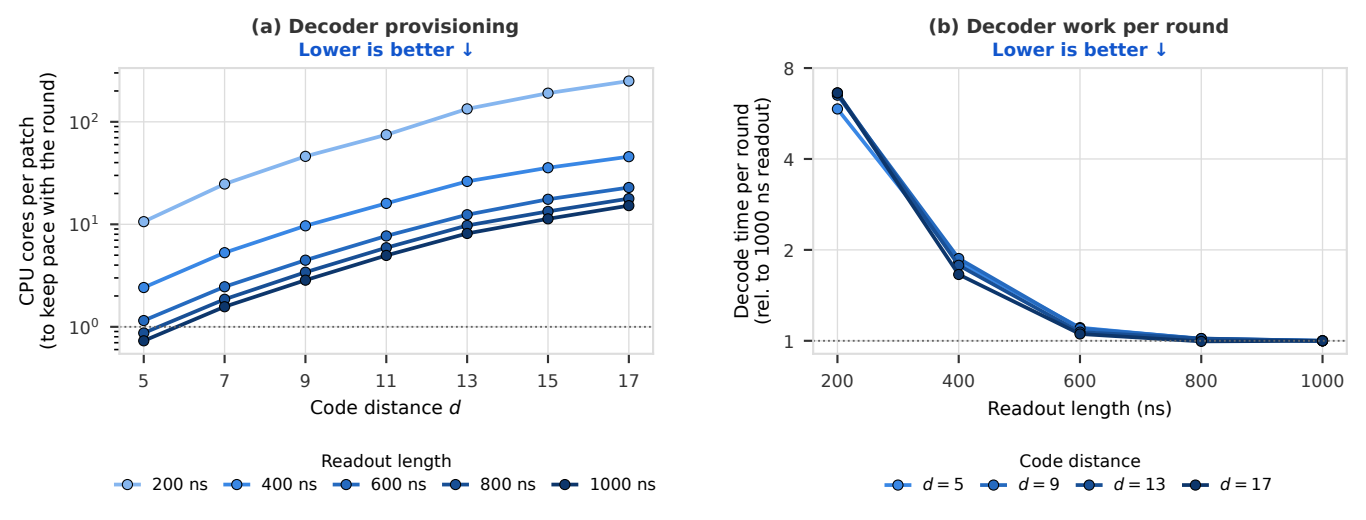
(a) Decoder provisioning
Lower is better ↓
CPU cores per patch
(to keep pace with the round)
10^2
10^1
10^0
5
7
9
11
13
15
17
Code distance d
Readout length
200 ns
400 ns
600 ns
800 ns
1000 ns
(b) Decoder work per round
Lower is better ↓
Decode time per round
(rel. to 1000 ns readout)
8
4
2
1
200
400
600
800
1000
Readout length (ns)
Code distance
$d = 5$
$d = 9$
$d = 13$
$d = 17$