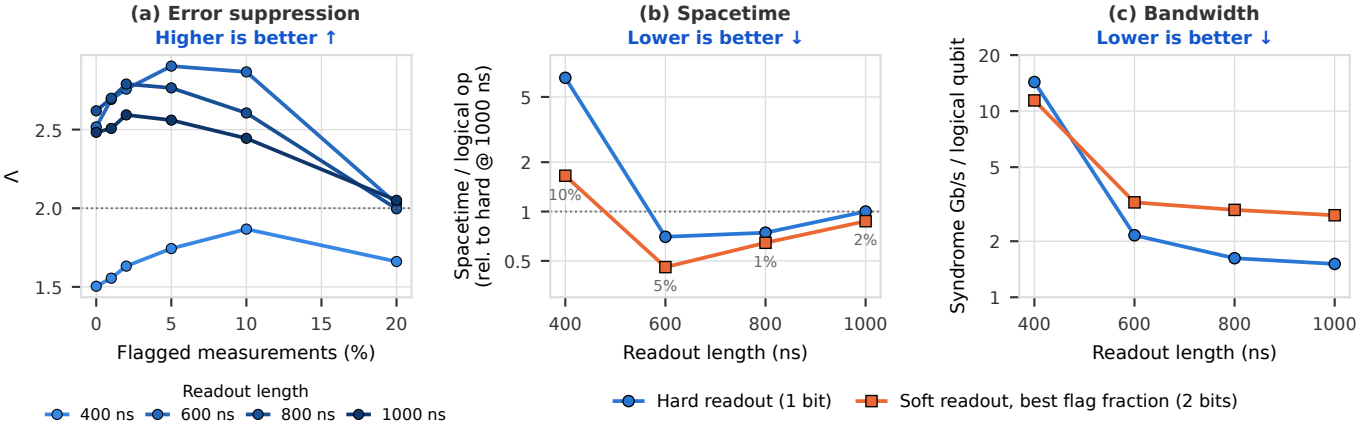
(a) Error suppression
Higher is better ↑
Λ
2.5
2.0
1.5
0
5
10
15
20
Flagged measurements (%)
Readout length
400 ns
600 ns
800 ns
1000 ns
(b) Spacetime
Lower is better ↓
Spacetime / logical op
(rel. to hard @ 1000 ns)
5
2
1
0.5
10%
5%
1%
2%
400
600
800
1000
Readout length (ns)
(c) Bandwidth
Lower is better ↓
Syndrome Gb/s / logical qubit
20
10
5
2
1
400
600
800
1000
Readout length (ns)
Hard readout (1 bit)
Soft readout, best flag fraction (2 bits)