

EX NO: 3a

**GENERATION OF PHASE MODULATED (PM) SIGNALS AND
CALCULATION OF PHASE DEVIATION USING MATLAB SIMULATION**

Objectives:

- i) To generate a Phase Modulated (PM) signal in MATLAB using specified carrier and message signal parameters.
- ii) To observe and analyze the time-domain characteristics of the message signal, carrier signal, and phase modulated signal through MATLAB simulation.
- iii) To calculate the phase deviation of the PM signal using the phase sensitivity constant and message signal amplitude.
- iv) To determine the modulation index of the PM signal and examine its relationship with phase deviation.
- v) To investigate the effect of varying message signal amplitude on the phase deviation and modulation characteristics of the PM signal.
- vi) To compare PM waveforms obtained for different phase deviation values and analyze their modulation behavior using MATLAB.

PROGRAM (MATLAB CODE)

```
clc;
```

```
clear;
```

```
close all;

% Parameters

Am = 1; % Message Amplitude (V)
fm = 100; % Message Frequency (Hz)
Ac = 5; % Carrier Amplitude (V)
fc = 1000; % Carrier Frequency (Hz)
fs = 20*fc; % Sampling Frequency (Hz)
kp = pi/2; % Phase Sensitivity (rad/V)

% Time Vector

t = 0:1/fs:4/fm;

% Message Signal

m = Am*sin(2*pi*fm*t);

% Carrier Signal

c = Ac*cos(2*pi*fc*t);

% Phase Modulated Signal

pm = Ac*cos(2*pi*fc*t + kp*m);

% Phase Deviation

phase_dev = kp*Am;

% PM Modulation Index

mp = phase_dev;

% Display Results

fprintf('%39;Message Amplitude = %.2f V\n%39;,Am);
fprintf('%39;Message Frequency = %.0f Hz\n%39;,fm);
fprintf('%39;Carrier Amplitude = %.2f V\n%39;,Ac);
```

```
fprintf(&#39;Carrier Frequency = %.0f Hz\n&#39;,fc);  
fprintf(&#39;Phase Sensitivity = %.2f rad/V\n&#39;,kp);  
fprintf(&#39;Phase Deviation = %.2f radians\n&#39;,phase_dev);  
fprintf(&#39;PM Modulation Index = %.2f\n&#39;,mp);  
  
% Plotting  
  
figure(&#39;Name&#39;,&#39;Phase Modulation and Phase  
Deviation&#39;,...  
  
&#39;NumberTitle&#39;,&#39;off&#39;);  
  
subplot(2,2,1);  
  
plot(t,m,&#39;LineWidth&#39;,1.5);  
  
title(&#39;Message Signal&#39;);  
  
xlabel(&#39;Time (s)&#39;);  
  
ylabel(&#39;Amplitude&#39;);  
  
grid on;  
  
subplot(2,2,2);  
  
plot(t,c,&#39;LineWidth&#39;,1.5);  
  
title(&#39;Carrier Signal&#39;);  
  
xlabel(&#39;Time (s)&#39;);  
  
ylabel(&#39;Amplitude&#39;);  
  
grid on;  
  
subplot(2,2,3);  
  
plot(t,pm,&#39;LineWidth&#39;,1.5);  
  
title(&#39;Phase Modulated Signal&#39;);  
  
xlabel(&#39;Time (s)&#39;);  
  
ylabel(&#39;Amplitude&#39;);
```

```
grid on;  
subplot(2,2,4);  
bar(phase_dev);  
title('Phase Deviation');  
ylabel('Radians');  
  
set(gca,'XTickLabel',{'PM Signal'});  
grid on;
```

Procedure:

1. Open MATLAB and create a new script file.
2. Initialize the MATLAB workspace by clearing all variables, command window contents,
and open figure windows using:

```
MATLAB>clc; clear; close all;
```

3. Define the message signal amplitude (), message frequency (), carrier amplitude (),
carrier frequency (), sampling frequency (), and phase sensitivity constant ().
4. Generate the time vector required for simulation using the specified sampling frequency.
5. Generate the message signal using a sinusoidal waveform with frequency .
6. Generate the carrier signal using a sinusoidal waveform with frequency .
7. Generate the Phase Modulated (PM) signal

8. Plot the message signal, carrier signal, and phase modulated signal using MATLAB

plotting commands.

9. Observe the phase variations in the PM waveform corresponding to changes in the

message signal amplitude.

10. Calculate the phase deviation of the PM signal

11. Determine the PM modulation index from the calculated phase deviation.

12. Display the values of phase deviation and modulation index in the MATLAB Command

Window using the fprintf() function.

13. Repeat the simulation for different message signal amplitudes and observe the

corresponding change in phase deviation.


14. Compare the generated PM waveforms for different phase deviation values.

15. Record the observations and verify the relationship between message amplitude, phase

deviation, and modulation index.

16. Analyze the simulation results and validate the characteristics of Phase Modulation.

OUTPUT (GRAPH)

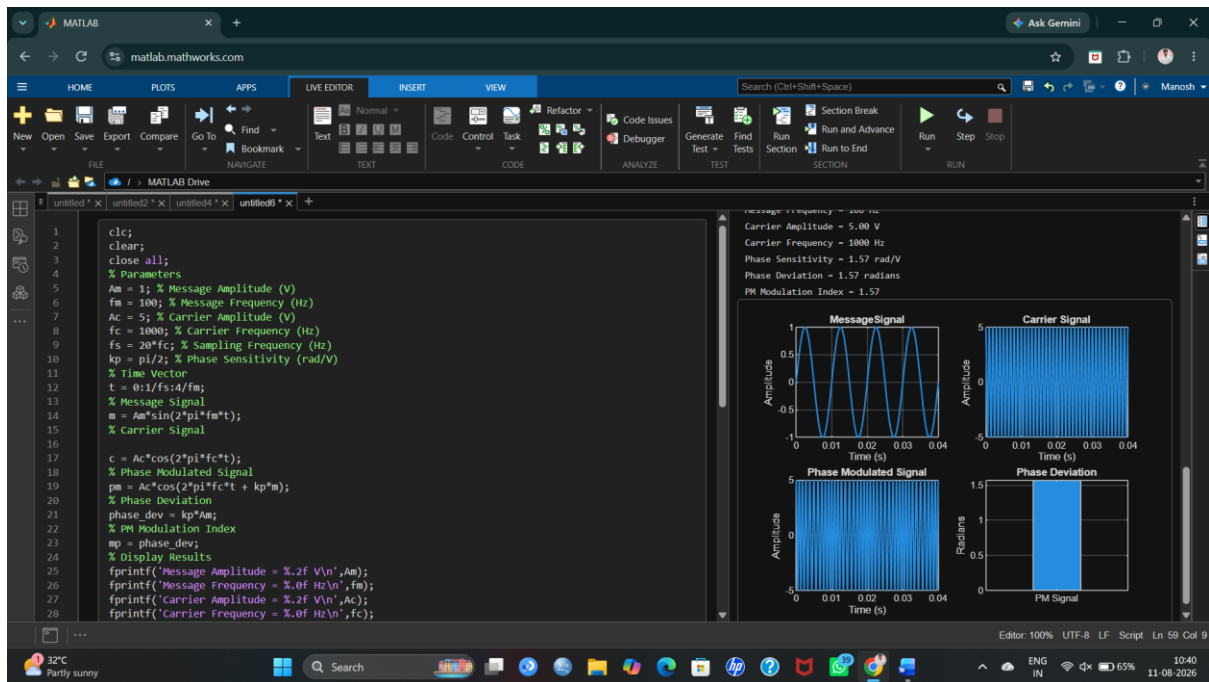

RESULT:

The Phase Modulated (PM) signal was successfully generated and analyzed using MATLAB. The phase deviation was calculated from the phase sensitivity constant and message amplitude.

- Message Frequency = 100 Hz
- Carrier Frequency = 1000 Hz
- Phase Sensitivity = 1.57 rad/V
- Phase Deviation = 1.57 radians
- PM Modulation Index = 1.57
- The PM waveform exhibited phase variations proportional to the message signal amplitude, verifying the characteristics of Phase Modulation.