

TIGER Neo

72HL4-BDV

570-590 Watt

BIFACIAL MODULE WITH DUAL GLASS

N-type




N-type Technology

N-type modules with Tunnel Oxide Passivating Contacts (TOPCon) technology offer lower LID/LeTID degradation and better low light performance.



HOT 2.0 Technology

N-type modules with JinkoSolar's HOT 2.0 technology offer better reliability and efficiency.

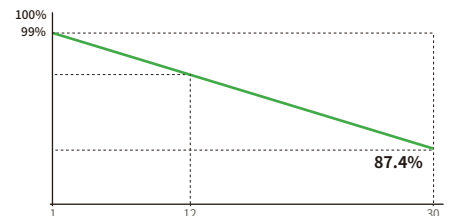

Dual-Sided Power Generation

Dual-sided power generation gain increases with backside exposure to light, significantly reducing LCOE.



Mechanical Load Enhanced

Certified to withstand:
5400 Pa front side max static test load
2400 Pa rear side max static test load

12 Year Product Warranty	30 Year Linear Power Warranty	1% First-year Degradation	0.4% Annual Degradation Over 30 Years
------------------------------------	--	--	--

- IEC61215 (2016) / IEC61730 (2016)
- IEC61701 / IEC62716 / IEC60068 / IEC62804
- ISO9001:2015: Quality Management System
- ISO14001:2015: Environment Management System
- ISO45001:2018: Occupational health and safety management systems



SMBB Technology

Better light trapping and current collection to improve module power output and reliability.



Anti-PID Guarantee

Minimizes the chance of degradation caused by PID phenomena through optimization of cell production technology and material control.



POSITIVE QUALITY™
Continuous Quality Assurance

JKM570-590N-72HL4-BDV-F8-EN

72HL4-BDV 570-590 Watt

Mechanical Characteristics

Cell Type	N- type Mono-crystalline
No. of cells	144 (72×2)
Dimensions	2278×1134×30 mm
Weight	31.0 kg
Front Glass	2.0 mm, Anti-Reflection Coating
Back Glass	2.0 mm, Heat Strengthened Glass
Frame	Anodized Aluminium Alloy
Junction Box	IP68 Rated
Protection Class	Class II
IEC Fire Type	Class C
Output Cables	4.0 mm ² (+): 400 mm , (-): 200 mm or Customized Length

Packaging Configuration

Pallet Dimensions	2338×1140×1251 mm
Packing Detail (Two pallets = One stack)	36 pcs/pallets, 72 pcs/stack, 720 pcs/ 40'HQ Container

Specifications (STC)

Maximum Power - Pmax [Wp]	570	575	580	585	590
Maximum Power Voltage - Vmp [V]	43.58	43.73	43.88	44.02	44.17
Maximum Power Current - Imp [A]	13.08	13.15	13.22	13.29	13.36
Open-circuit Voltage - Voc [V]	52.10	52.30	52.50	52.70	52.90
Short-circuit Current - Isc [A]	13.83	13.89	13.95	14.01	14.07
Module Efficiency STC [%]	22.07	22.26	22.45	22.65	22.84
Power Tolerance	0 ~ + 3 %				
Temperature Coefficients of Pmax	-0.29 %/°C				
Temperature Coefficients of Voc	-0.25 %/°C				
Temperature Coefficients of Isc	0.045 %/°C				

STC: Irradiance 1000W/m², Cell Temperature 25°C, AM=1.5

Specifications (NOCT)


Maximum Power - Pmax [Wp]	430	433	437	441	445
Maximum Power Voltage - Vmp [V]	40.56	40.73	40.89	41.05	41.21
Maximum Power Current - Imp [A]	10.59	10.64	10.69	10.74	10.79
Open-circuit Voltage - Voc [V]	49.49	49.68	49.87	50.06	50.25
Short-circuit Current - Isc [A]	11.16	11.21	11.26	11.31	11.36

NOCT: Irradiance 800W/m², Ambient Temperature 20°C, AM=1.5, Wind Speed 1m/s

Application Conditions

Operating Temperature	-40 °C ~ +85 °C
Maximum System Voltage	1500 VDC (IEC)
Maximum Series Fuse Rating	30 A
Nominal Operating Cell Temperature -NOCT	45±2 °C
Refer. Bifacial Factor	80±5 %


Engineering Drawings

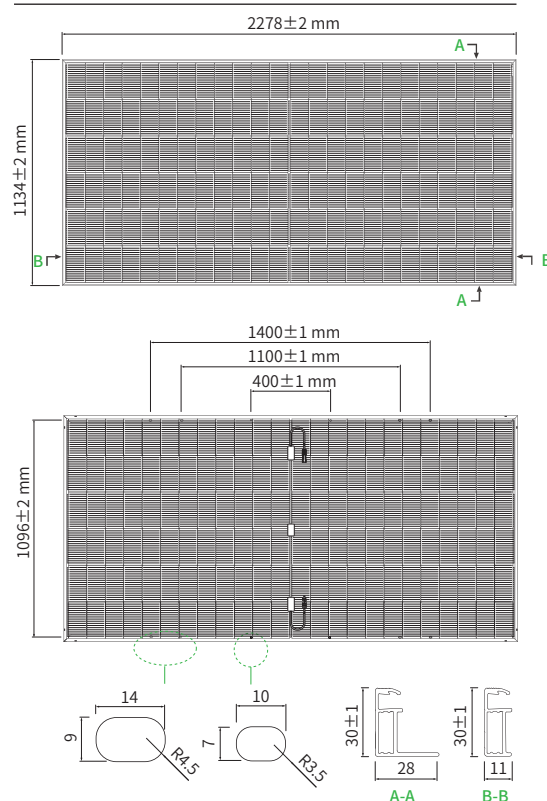


Note: For specific dimensions and tolerance ranges, please refer to the corresponding detailed module drawings.

Electrical Performance

Power-Voltage Curves (72HL4-BDV 580 W)

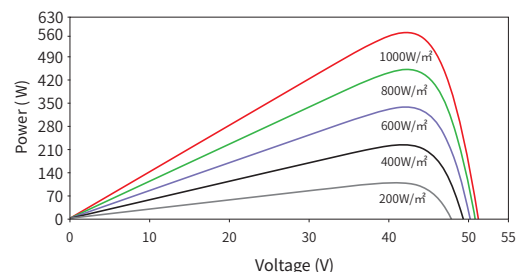

Current-Voltage Curves (72HL4-BDV 580 W)

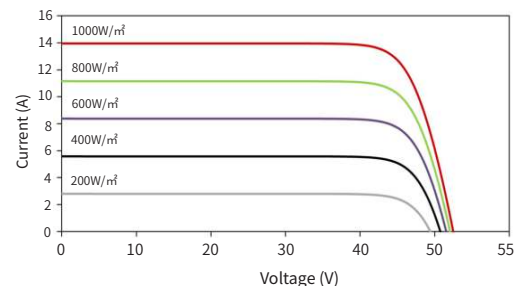

CERTIFICATE OF COMPLIANCE

Certificate Number E362479
Report Reference E362479-20190628
Date 2023-July-15

Issued to: JINKO SOLAR CO LTD
No.1, Yingbin Road, Economic Development Zone
Shangrao Jiangxi Sheng 334100 CN

**This is to certify that
representative samples of** PHOTOVOLTAIC MODULES AND PANELS WITH
SYSTEM VOLTAGE RATINGS OVER 600 VOLTS

See Addendum Page for Product Designation(s).

Have been evaluated by UL in accordance with the
Standard(s) indicated on this Certificate.


Standard(s) for Safety: Standard for the Safety for Photovoltaic (PV) Module Safety
Qualification - Part 1: Requirements for Construction, UL
61730-1, and UL Standard for Safety for Photovoltaic (PV)
Module Safety Qualification - Part 2: Requirements for
Testing, UL 61730-2,. CSA-C22.2 No. 61730-1:19
December 2019, Photovoltaic (PV) module safety
qualification — Part 1: Requirements for construction and
CSA-C22.2 No. 61730-2:19 December 2019, Photovoltaic
(PV) module safety qualification — Part 2: Requirements for
testing.

Additional Information: See the UL Online Certifications Directory at
<https://iq.ulprospector.com> for additional information

This Certificate of Compliance indicates that representative samples of the product described in the certification report have met the requirements for UL certification. It does not provide authorization to apply the UL Mark. Only the Authorization Page that references the Follow-Up Services Procedure for ongoing surveillance provides authorization to apply the UL Mark.

Only those products bearing the UL Mark should be considered as being UL Certified and covered under UL's Follow-Up Services.

Look for the UL Certification Mark on the product.


Deborah Jennings-Conner, VP Regulatory Services
UL LLC



Any information and documentation involving UL Mark services are provided on behalf of UL LLC (UL) or any authorized licensee of UL. For questions, please contact a local UL Customer Service Representative at <http://ul.com/aboutul/locations/>

CERTIFICATE OF COMPLIANCE

Certificate Number E362479
Report Reference E362479-20190628
Date 2023-July-15

This is to certify that representative samples of the product as specified on this certificate were tested according to the current UL requirements

Photovoltaic (Solar) Modules,

USL – Models:

JKM305M-60L-BDVP, JKM310M-60L-BDVP, JKM315M-60L-BDVP, JKM320M-60L-BDVP,
JKM325M-60L-BDVP, JKM330M-60L-BDVP, JKM330M-60L-BDVP

JKM310M-60HL-BDVP, JKM315M-60HL-BDVP, JKM320M-60HL-BDVP, JKM325M-60HL-BDVP,
JKM330M-60HL-BDVP, JKM335M-60HL-BDVP

JKM370M-72L-BDVP, JKM375M-72L-BDVP, JKM380M-72L-BDVP, JKM385M-72L-BDVP,
JKM390M-72L-BDVP, JKM395M-72L-BDVP, JKM400M-72L-BDVP

JKM375M-72HL-BDVP, JKM380M-72HL-BDVP, JKM385M-72HL-BDVP, JKM390M-72HL-BDVP,
JKM395M-72HL-BDVP, JKM400M-72HL-BDVP, JKM405M-72HL-BDVP

JKM315M-60L-BDV, JKM320M-60L-BDV, JKM325M-60L-BDV, JKM330M-60L-BDV, JKM335M-60L-BDV,
JKM340M-60L-BDV, JKM345M-60L-BDV

JKM315M-60HL-BDV, JKM320M-60HL-BDV, JKM325M-60HL-BDV, JKM330M-60HL-BDV,
JKM335M-60HL-BDV, JKM340M-60HL-BDV, JKM345M-60HL-BDV

JKM370M-72L-BDV, JKM375M-72L-BDV, JKM380M-72L-BDV, JKM385M-72L-BDV, JKM390M-72L-BDV,
JKM395M-72L-BDV, JKM400M-72L-BDV, JKM405M-72L-BDV, JKM410M-72L-BDV


JKM375M-72HL-BDV, JKM380M-72HL-BDV, JKM385M-72HL-BDV, JKM390M-72HL-BDV,
JKM395M-72HL-BDV, JKM400M-72HL-BDV, JKM405M-72HL-BDV, JKM410M-72HL-BDV

USL/CNL – Models:

JKM500M-72HL4-BDVP, JKM505M-72HL4-BDVP, JKM510M-72HL4-BDVP, JKM515M-72HL4-BDVP,
JKM520M-72HL4-BDVP, JKM525M-72HL4-BDVP, JKM530M-72HL4-BDVP, JKM535M-72HL4-BDVP,
JKM540M-72HL4-BDVP, JKM545M-72HL4-BDVP, JKM550M-72HL4-BDVP.

JKM460M-66HL4-BDVP, JKM465M-66HL4-BDVP, JKM470M-66HL4-BDVP, JKM475M-66HL4-BDVP,
JKM480M-66HL4-BDVP, JKM485M-66HL4-BDVP, JKM490M-66HL4-BDVP, JKM495M-66HL4-BDVP,
JKM500M-66HL4-BDVP.

JKM420M-60HL4-BDVP, JKM425M-60HL4-BDVP, JKM430M-60HL4-BDVP, JKM435M-60HL4-BDVP,
JKM440M-60HL4-BDVP, JKM445M-60HL4-BDVP, JKM450M-60HL4-BDVP, JKM455M-60HL4-BDVP,
JKM375M-54HL4-BDVP, JKM380M-54HL4-BDVP, JKM385M-54HL4-BDVP, JKM390M-54HL4-BDVP,
JKM395M-54HL4-BDVP, JKM400M-54HL4-BDVP, JKM405M-54HL4-BDVP, JKM410M-54HL4-BDVP.


Deborah Jennings-Conner, VP Regulatory Services

UL LLC



Any information and documentation involving UL Mark services are provided on behalf of UL LLC (UL) or any authorized licensee of UL. For questions, please contact a local UL Customer Service Representative at <http://ul.com/aboutul/locations/>

CERTIFICATE OF COMPLIANCE

Certificate Number E362479
Report Reference E362479-20190628
Date 2023-July-15

JKM570N-78HL4-BDV, JKM575N-78HL4-BDV, JKM580N-78HL4-BDV, JKM585N-78HL4-BDV,
JKM590N-78HL4-BDV, JKM595N-78HL4-BDV, JKM600N-78HL4-BDV, JKM605N-78HL4-BDV,
JKM610N-78HL4-BDV, JKM615N-78HL4-BDV, JKM620N-78HL4-BDV, JKM625N-78HL4-BDV,
JKM630N-78HL4-BDV, JKM635N-78HL4-BDV, JKM640N-78HL4-BDV.

JKM515N-72HL4-BDV, JKM520N-72HL4-BDV, JKM525N-72HL4-BDV, JKM530N-72HL4-BDV,
JKM535N-72HL4-BDV, JKM540N-72HL4-BDV, JKM545N-72HL4-BDV, JKM550N-72HL4-BDV,
JKM555N-72HL4-BDV, JKM560N-72HL4-BDV, JKM565N-72HL4-BDV, JKM570N-72HL4-BDV,
JKM575N-72HL4-BDV, JKM580N-72HL4-BDV, JKM585N-72HL4-BDV, JKM590N-72HL4-BDV.

JKM470N-66HL4-BDV, JKM475N-66HL4-BDV, JKM480N-66HL4-BDV, JKM485N-66HL4-BDV,
JKM490N-66HL4-BDV, JKM495N-66HL4-BDV, JKM500N-66HL4-BDV, JKM505N-66HL4-BDV,
JKM510N-66HL4-BDV, JKM515N-66HL4-BDV, JKM520N-66HL4-BDV.

JKM430N-60HL4-BDV, JKM435N-60HL4-BDV, JKM440N-60HL4-BDV, JKM445N-60HL4-BDV,
JKM450N-60HL4-BDV, JKM455N-60HL4-BDV, JKM460N-60HL4-BDV, JKM465N-60HL4-BDV,
JKM470N-60HL4-BDV, JKM475N-60HL4-BDV, JKM480N-60HL4-BDV, JKM485N-60HL4-BDV,
JKM490N-60HL4-BDV.


JKM385N-54HL4-BDV, JKM390N-54HL4-BDV, JKM395N-54HL4-BDV, JKM400N-54HL4-BDV,
JKM405N-54HL4-BDV, JKM410N-54HL4-BDV, JKM415N-54HL4-BDV, JKM420N-54HL4-BDV,
JKM425N-54HL4-BDV, JKM430N-54HL4-BDV, JKM435N-54HL4-BDV, JKM440N-54HL4-BDV.

JKM585N-78HL4R-BDV, JKM590N-78HL4R-BDV, JKM595N-78HL4R-BDV,
JKM600N-78HL4R-BDV, JKM605N-78HL4R-BDV, JKM610N-78HL4R-BDV,
JKM615N-78HL4R-BDV, JKM620N-78HL4R-BDV, JKM625N-78HL4R-BDV,
JKM630N-78HL4R-BDV, JKM635N-78HL4R-BDV, JKM640N-78HL4R-BDV,
JKM645N-78HL4R-BDV, JKM650N-78HL4R-BDV.

JKM540N-72HL4R-BDV, JKM545N-72HL4R-BDV, JKM550N-72HL4R-BDV,
JKM555N-72HL4R-BDV, JKM560N-72HL4R-BDV, JKM565N-72HL4R-BDV,
JKM570N-72HL4R-BDV, JKM575N-72HL4R-BDV, JKM580N-72HL4R-BDV,
JKM585N-72HL4R-BDV, JKM590N-72HL4R-BDV, JKM595N-72HL4R-BDV,
JKM600N-72HL4R-BDV.

JKM450N-60HL4R-BDV, JKM455N-60HL4R-BDV, JKM460N-60HL4R-BDV,
JKM465N-60HL4R-BDV, JKM470N-60HL4R-BDV, JKM475N-60HL4R-BDV,
JKM480N-60HL4R-BDV, JKM485N-60HL4R-BDV, JKM490N-60HL4R-BDV,
JKM495N-60HL4R-BDV, JKM500N-60HL4R-BDV.

JKM405N-54HL4R-BDV, JKM410N-54HL4R-BDV, JKM415N-54HL4R-BDV,
JKM420N-54HL4R-BDV, JKM425N-54HL4R-BDV, JKM430N-54HL4R-BDV,
JKM435N-54HL4R-BDV, JKM440N-54HL4R-BDV, JKM445N-54HL4R-BDV,
JKM450N-54HL4R-BDV.


Deborah Jennings-Conner, VP Regulatory Services

UL LLC



Any information and documentation involving UL Mark services are provided on behalf of UL LLC (UL) or any authorized licensee of UL. For questions, please contact a local UL Customer Service Representative at <http://ul.com/aboutul/locations/>