MAKING RAPID PROTOTYPING
ADDITIVE MANUFACTURING

3CUBIC™
BUILD YOUR FUTURE



INDIAN 3DPRINTER & CNC & LASER MANUFACTURER

Factory.39, Babrik industrial Estate,
Opp. BOB., Katargam GIDC,
Surat, Gujarat-395004

Web www.3dcubic.in
Email info@3dcubic.in
Phone 95370 02444
88665 74992

3CUBIC™
BUILD YOUR FUTURE

CUB 2.25 / 2.4

INDUSTRIAL BASED 3DPRINTER
WITH FUSED DEPOSITION
(FFF/FDM) 3DPRINTER



TECH SPECS

BUILD SIZE
250mm X 250mm X 250mm/400mm

NOZZLE DIAMETER
0.4mm- 1.0mm (Optional)

EXTRUDER
High Torque Direct Drive
Single (Upgradable to Duel)

PRINTING SPEED
200mm/s as per material

EXTRUDER TEMPERATURE
30-300 degree (Upgradable)

BED TEMPERATURE
30-150 degree

DIMENSIONS
610 X 610 X 800/990 mm

ACCURACY (Z LAYER HEIGHT)
80-600 Micron(Depends Nozzle)

CONNECTIVITY
USB, Udisk, SD Card,Wi-Fi

WEIGHT
48/56 Kg

INPUT
220V-4A-50Hz

MATERIAL COMPATIBILITY
(DIAMETER 1.75MM)
PLA+, ABS, PETG, HIPS, PVA
CARBON FIBER-COMPOSITE
PC,PP,TPU 90 SHORE, WOODEN FILL


XY AXIS- THK Linear Rail- Guide For Better Layer Resolution
Z AXIS - HIWIN Ball Screw for 80 Micron Resolution
Auto Bed Levelling
Resume Capacity on Power Failure & Filament Sensor
Touch Screen Display
On Board RESET Switch for Emergency Stop
Powder Coated Robust Structure with Internal LED
Support- Windows (7/8/10/11) Mac OS
Installation & Training+Trobleshooting with On site 1 Year Warrenty
3D Printer Accessories (Free of Cost)



3CUBIC™
BUILD YOUR FUTURE

CUB 3.5

INDUSTRIAL BASED 3DPRINTER
WITH FUSED DEPOSITION
(FFF/FDM) 3DPRINTER

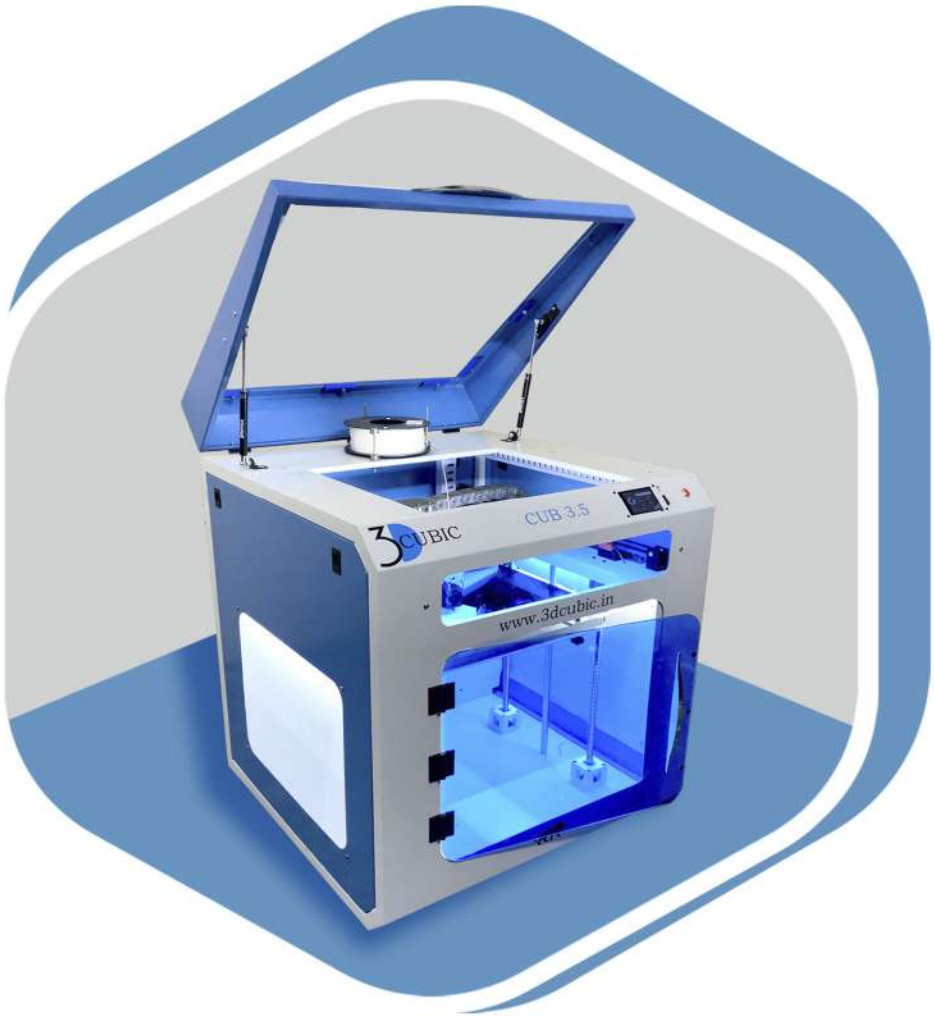

TECH SPECS

BUILD SIZE
350mm X 350mm X 350mm

NOZZLE DIAMETER
0.4mm- 1.0mm (Optional)

EXTRUDER
High Torque Direct Drive
Single (Upgradable to Duel)

PRINTING SPEED
200mm/s as per material

EXTRUDER TEMPERATURE
30-300 degree (Upgradable)

BED TEMPERATURE
30-150 degree

DIMENSIONS
780 X 780 X 990 mm

ACCURACY (Z LAYER HEIGHT)
80-600 Micron(Depends Nozzle)


CONNECTIVITY
USB, Udisk, SD Card,Wi-Fi

WEIGHT
80 Kg

INPUT
220V-4A-50Hz

MATERIAL COMPATIBILITY
(DIAMETER 1.75MM)
PLA+, ABS, PETG, HIPS, PVA
CARBON FIBER-COMPOSITE
PC,PP,TPU 90 SHORE, WOODEN FILL


XY AXIS- THK Linear Rail- Guide For Better Layer Resolution
Z AXIS - HIWIN Ball Screw for 80 Micron Resolution
Auto Bed Levelling
Resume Capacity on Power Failure & Filament Sensor
Touch Screen Display
On Board RESET Switch for Emergency Stop
Powder Coated Robust Structure with Internal LED
Support- Windows (7/8/10/11) Mac OS
Installation & Training+Trobleshooting with On site 1 Year Warrenty
3D Printer Accessories (Free of Cost)

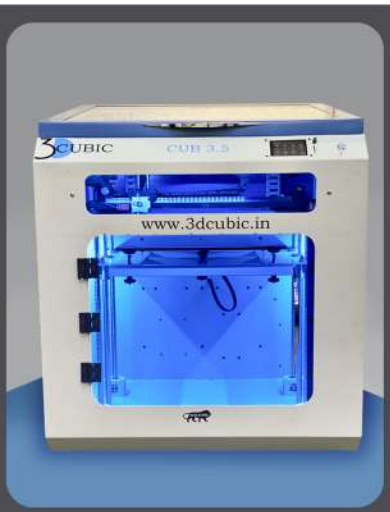

3CUBIC™
BUILD YOUR FUTURE

CUB 4.5

INDUSTRIAL BASED 3DPRINTER
WITH FUSED DEPOSITION
(FFF/FDM) 3DPRINTER

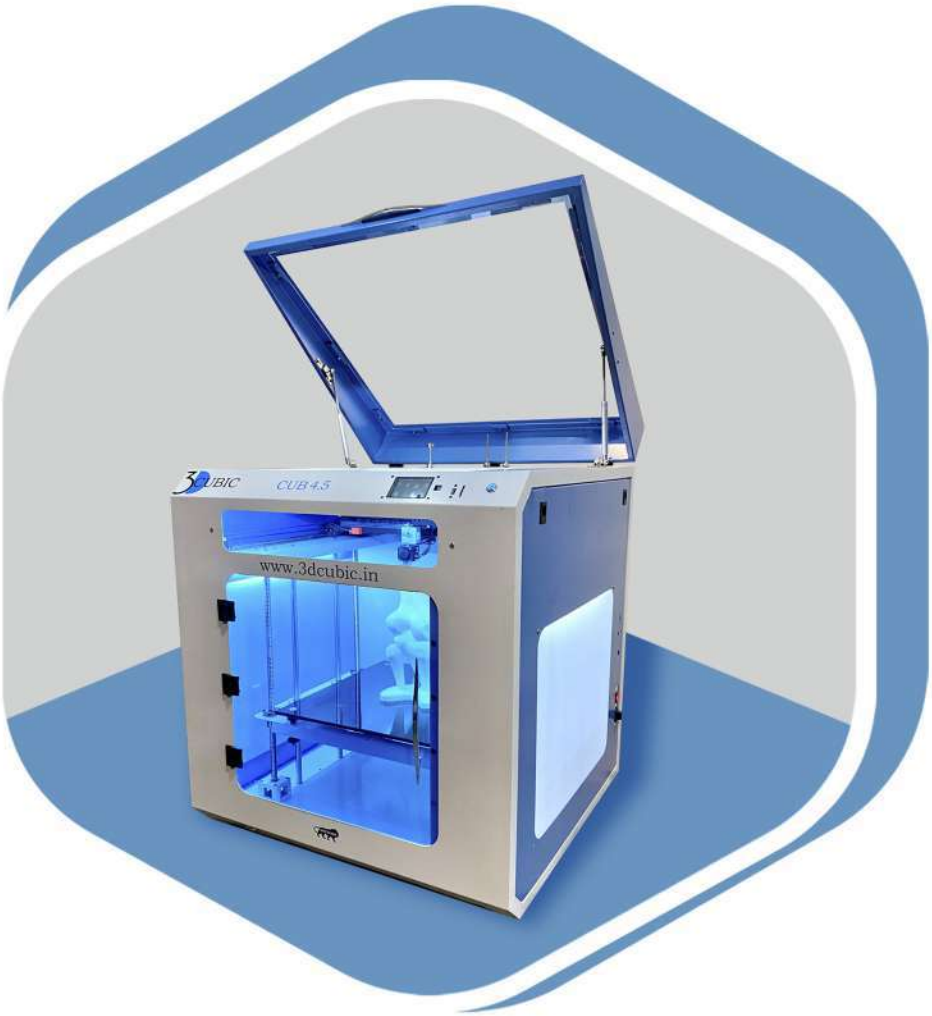

TECH SPECS

BUILD SIZE
400mm X 400mm X 450mm

NOZZLE DIAMETER
0.4mm- 1.0mm (Optional)

EXTRUDER
High Torque Direct Drive
Single (Upgradable to Duel)

PRINTING SPEED
200mm/s as per material

EXTRUDER TEMPERATURE
30-300 degree (Upgradable)

BED TEMPERATURE
30-150 degree

DIMENSIONS
840 X 840 X 990 mm

ACCURACY (Z LAYER HEIGHT)
80-600 Micron(Depends Nozzle)


CONNECTIVITY
USB, Udisk, SD Card,Wi-Fi

WEIGHT
95 Kg

INPUT
220V-4A-50Hz

MATERIAL COMPATIBILITY
(DIAMETER 1.75MM)
PLA+, ABS, PETG, HIPS, PVA
CARBON FIBER-COMPOSITE
PC,PP,TPU 90 SHORE, WOODEN FILL


XY AXIS- THK Linear Rail- Guide For Better Layer Resolution
Z AXIS - HIWIN Ball Screw for 80 Micron Resolution
Auto Bed Levelling
Resume Capacity on Power Failure & Filament Sensor
Touch Screen Display
On Board RESET Switch for Emergency Stop
Powder Coated Robust Structure with Internal LED
Support- Windows (7/8/10/11) Mac OS
Installation & Training+Trobleshooting with On site 1 Year Warrenty
3D Printer Accessories (Free of Cost)

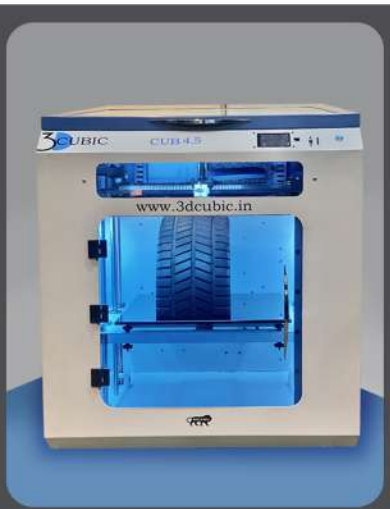

3CUBIC™
BUILD YOUR FUTURE

CUB 5.5 / 5.10

INDUSTRIAL BASED 3DPRINTER
WITH FUSED DEPOSITION
(FFF/FDM) 3DPRINTER

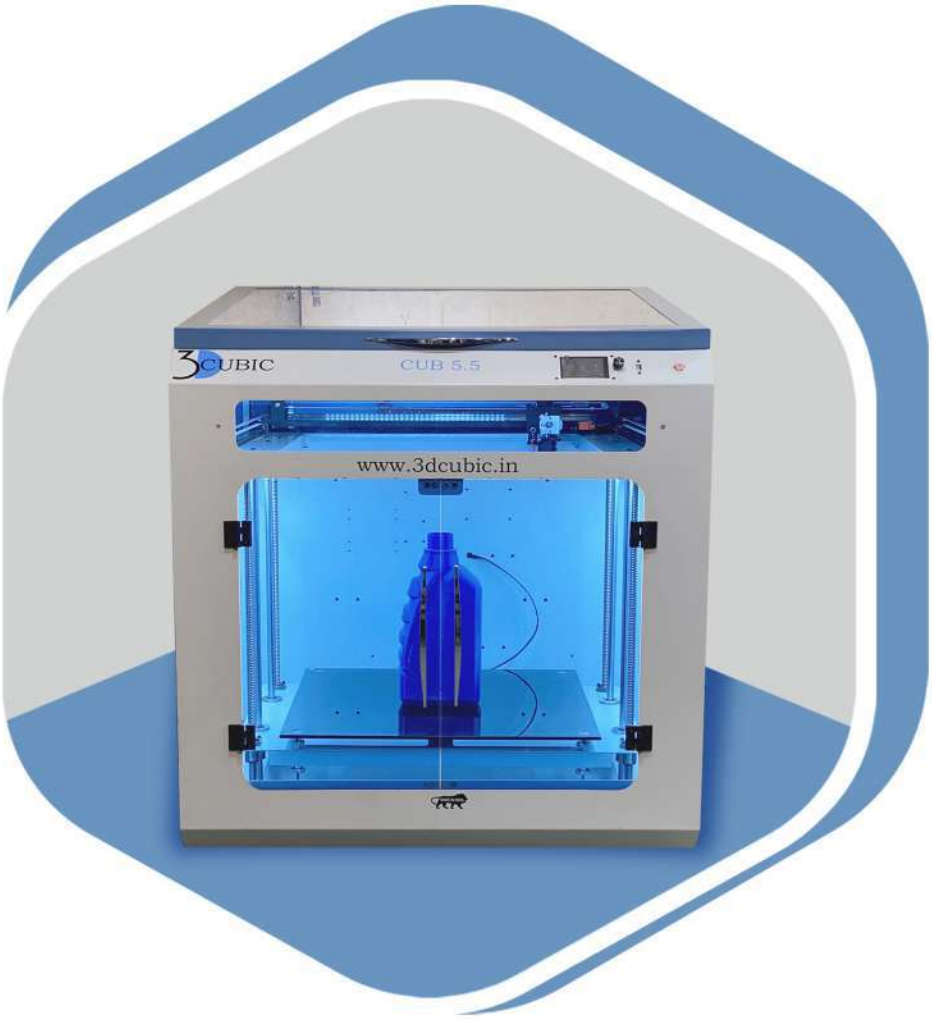

TECH SPECS

BUILD SIZE
550mm X 550mm X 550 / 1000 mm

NOZZLE DIAMETER
0.4mm- 1.0mm (Optional)

EXTRUDER
High Torque Direct Drive
Single (Upgradable to Duel)

PRINTING SPEED
200mm/s as per material

EXTRUDER TEMPERATURE
30-300 degree (Upgradable)

BED TEMPERATURE
30-150 degree

DIMENSIONS
980 X 980 X 1030 / 1680 mm

ACCURACY (Z LAYER HEIGHT)
80-600 Micron(Depends Nozzle)


CONNECTIVITY
USB, Udisk, SD Card,Wi-Fi

WEIGHT
136 / 195 Kg

INPUT
220V-4A-50Hz

MATERIAL COMPATIBILITY
(DIAMETER 1.75MM)
PLA+, ABS, PETG, HIPS, PVA
CARBON FIBER-COMPOSITE
PC,PP,TPU 90 SHORE, WOODEN FILL


XY AXIS- THK Linear Rail- Guide For Better Layer Resolution
Z AXIS - HIWIN Ball Screw for 80 Micron Resolution
Auto Bed Levelling
Resume Capacity on Power Failure & Filament Sensor
Touch Screen Display
On Board RESET Switch for Emergency Stop
Powder Coated Robust Structure with Internal LED
Support- Windows (7/8/10/11) Mac OS
Installation & Training+Trobleshooting with On site 1 Year Warrenty
3D Printer Accessories (Free of Cost)

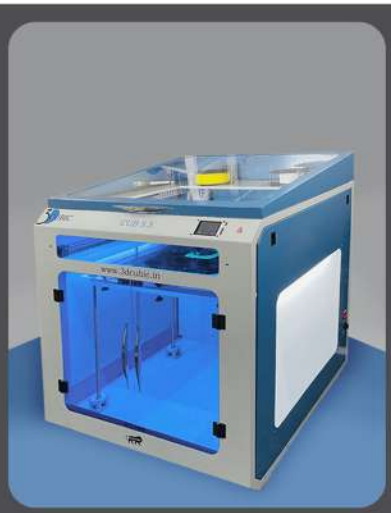

3CUBIC™
BUILD YOUR FUTURE

CUB 6.0

INDUSTRIAL BASED 3DPRINTER
WITH FUSED DEPOSITION
(FFF/FDM) 3DPRINTER

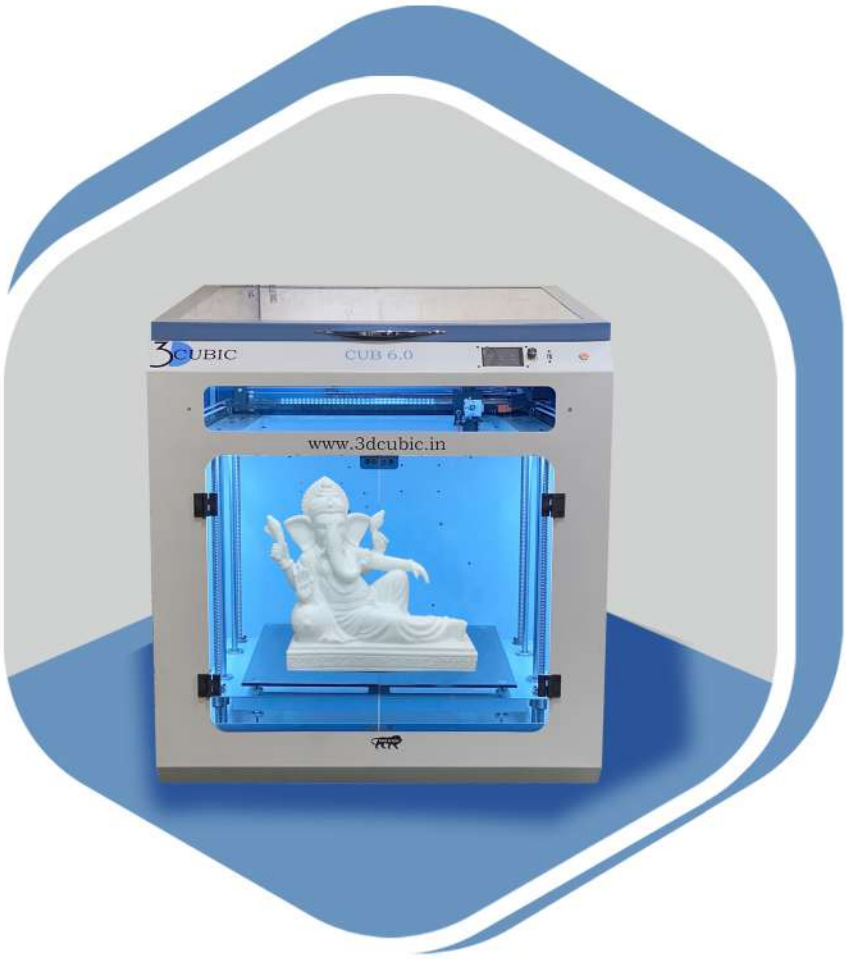

TECH SPECS

BUILD SIZE
600mm X 600mm X 600 mm

NOZZLE DIAMETER
0.4mm- 1.0mm (Optional)

EXTRUDER
High Torque Direct Drive
Single (Upgradable to Duel)

PRINTING SPEED
200mm/s as per material

EXTRUDER TEMPERATURE
30-300 degree (Upgradable)

BED TEMPERATURE
30-150 degree

DIMENSIONS
1050 X 1050 X 1200 mm

ACCURACY (Z LAYER HEIGHT)
80-600 Micron(Depends Nozzle)


CONNECTIVITY
USB, Udisk, SD Card,Wi-Fi

WEIGHT
158 Kg

INPUT
220V-4A-50Hz

MATERIAL COMPATIBILITY
(DIAMETER 1.75MM)
PLA+, ABS, PETG, HIPS, PVA
CARBON FIBER-COMPOSITE
PC,PP,TPU 90 SHORE, WOODEN FILL


XY AXIS- THK Linear Rail- Guide For Better Layer Resolution
Z AXIS - HIWIN Ball Screw for 80 Micron Resolution
Auto Bed Levelling
Resume Capacity on Power Failure & Filament Sensor
Touch Screen Display
On Board RESET Switch for Emergency Stop
Powder Coated Robust Structure with Internal LED
Support- Windows (7/8/10/11) Mac OS
Installation & Training+Trobleshooting with On site 1 Year Warrenty
3D Printer Accessories (Free of Cost)

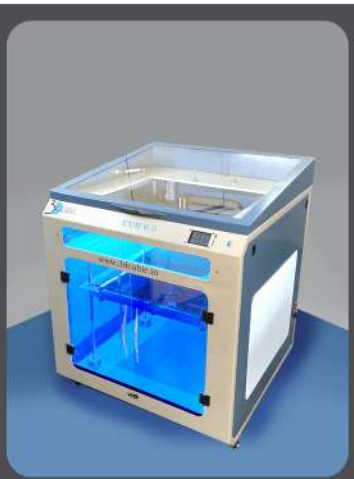

3CUBIC™
BUILD YOUR FUTURE

CUB 7.10

INDUSTRIAL BASED 3DPRINTER
WITH FUSED DEPOSITION
(FFF/FDM) 3DPRINTER

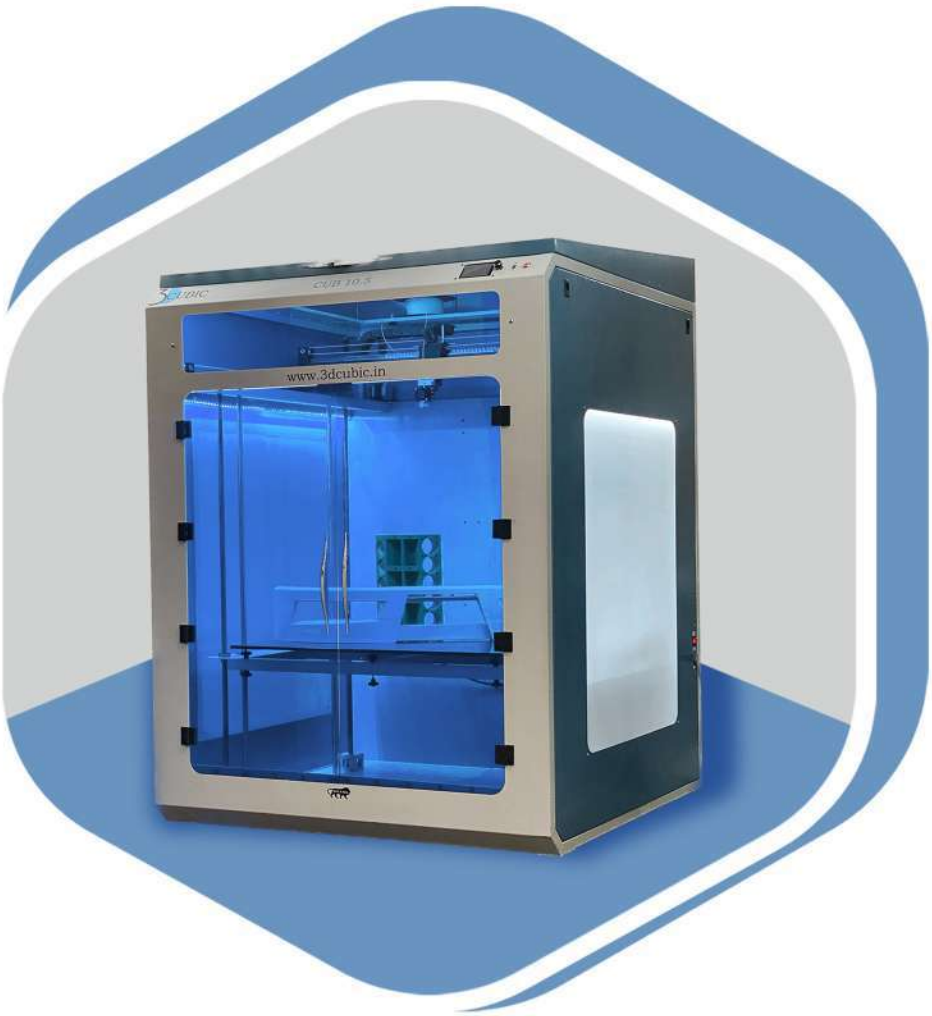

TECH SPECS

BUILD SIZE
700mm X 700mm X 1000 mm

NOZZLE DIAMETER
0.4mm- 1.0mm (Optional)

EXTRUDER
High Torque Direct Drive
Single (Upgradable to Duel)

PRINTING SPEED
200mm/s as per material

EXTRUDER TEMPERATURE
30-300 degree (Upgradable)

BED TEMPERATURE
30-150 degree

DIMENSIONS
1360 X 1360 X 1680 mm

ACCURACY (Z LAYER HEIGHT)
80-600 Micron(Depends Nozzle)


CONNECTIVITY
USB, Udisk, SD Card,Wi-Fi

WEIGHT
232 Kg

INPUT
220V-4A-50Hz

MATERIAL COMPATIBILITY
(DIAMETER 1.75MM)
PLA+, ABS, PETG, HIPS, PVA
CARBON FIBER-COMPOSITE
PC,PP,TPU 90 SHORE, WOODEN FILL


XY AXIS- THK Linear Rail- Guide For Better Layer Resolution
Z AXIS - HIWIN Ball Screw for 80 Micron Resolution
Auto Bed Levelling
Resume Capacity on Power Failure & Filament Sensor
Touch Screen Display
On Board RESET Switch for Emergency Stop
Powder Coated Robust Structure with Internal LED
Support- Windows (7/8/10/11) Mac OS
Installation & Training+Trobleshooting with On site 1 Year Warrenty
3D Printer Accessories (Free of Cost)

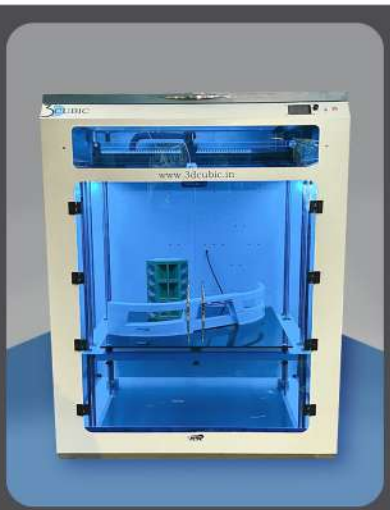

3CUBIC™
BUILD YOUR FUTURE

CUB 10.5 / 10.10

INDUSTRIAL BASED 3DPRINTER
WITH FUSED DEPOSITION
(FFF/FDM) 3DPRINTER

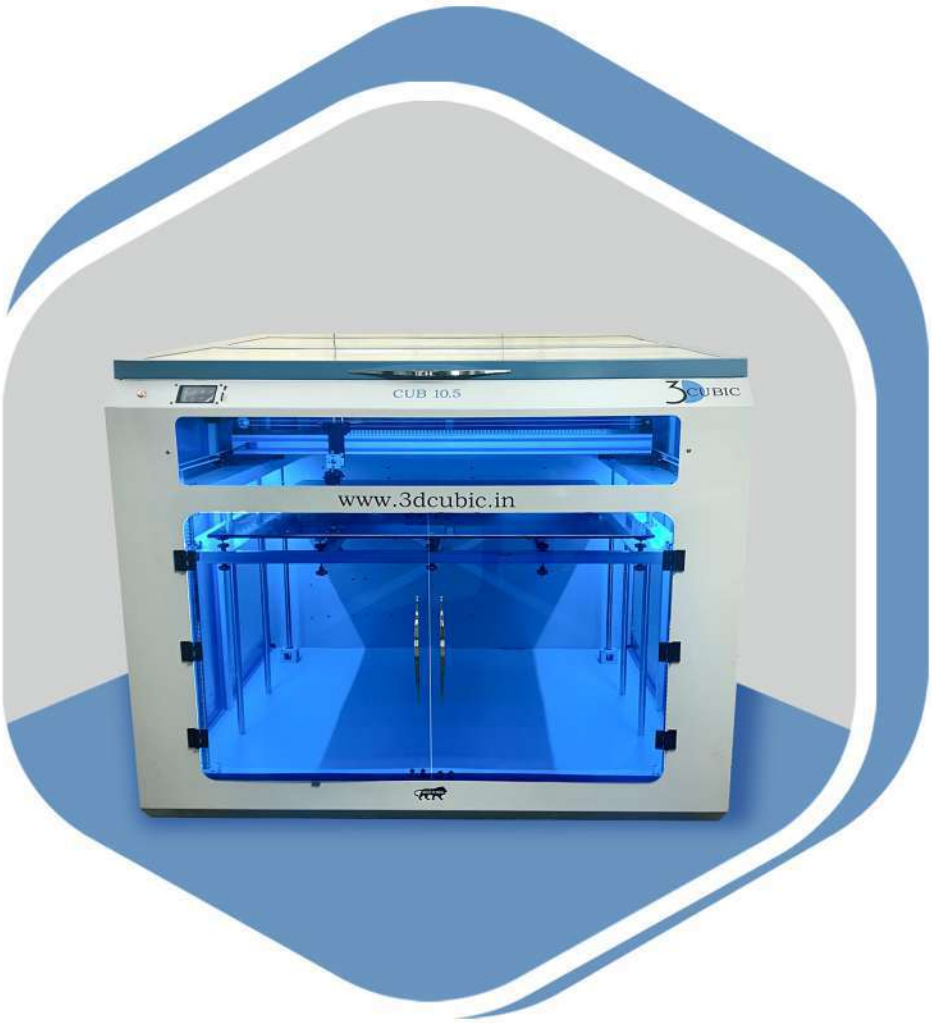

TECH SPECS

BUILD SIZE
1000mm X 1000mm X 500/1000 mm

NOZZLE DIAMETER
0.4mm- 1.0mm (Optional)

EXTRUDER
High Torque Direct Drive
Single (Upgradable to Duel)

PRINTING SPEED
200mm/s as per material

EXTRUDER TEMPERATURE
30-300 degree (Upgradable)

BED TEMPERATURE
30-150 degree

DIMENSIONS
1530 X 1530 X 1080 / 1680 mm

ACCURACY (Z LAYER HEIGHT)
80-600 Micron(Depends Nozzle)


CONNECTIVITY
USB, Udisk, SD Card,Wi-Fi

WEIGHT
260 / 292 Kg

INPUT
220V-4A-50Hz

MATERIAL COMPATIBILITY
(DIAMETER 1.75MM)
PLA+, ABS, PETG, HIPS, PVA
CARBON FIBER-COMPOSITE
PC,PP,TPU 90 SHORE, WOODEN FILL


XY AXIS- THK Linear Rail- Guide For Better Layer Resolution
Z AXIS - HIWIN Ball Screw for 80 Micron Resolution
Auto Bed Levelling
Resume Capacity on Power Failure & Filament Sensor
Touch Screen Display
On Board RESET Switch for Emergency Stop
Powder Coated Robust Structure with Internal LED
Support- Windows (7/8/10/11) Mac OS
Installation & Training+Trobleshooting with On site 1 Year Warrenty
3D Printer Accessories (Free of Cost)

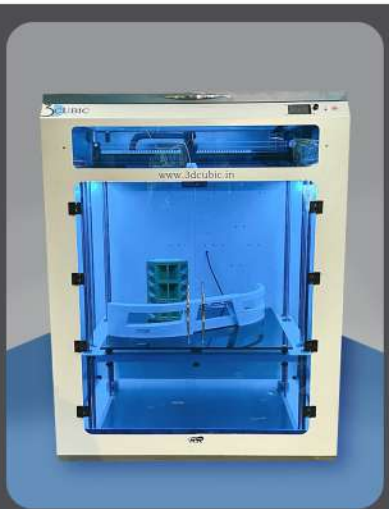

3CUBIC™
BUILD YOUR FUTURE

CUB 15.15

INDUSTRIAL BASED 3DPRINTER
WITH FUSED DEPOSITION
(FFF/FDM) 3DPRINTER

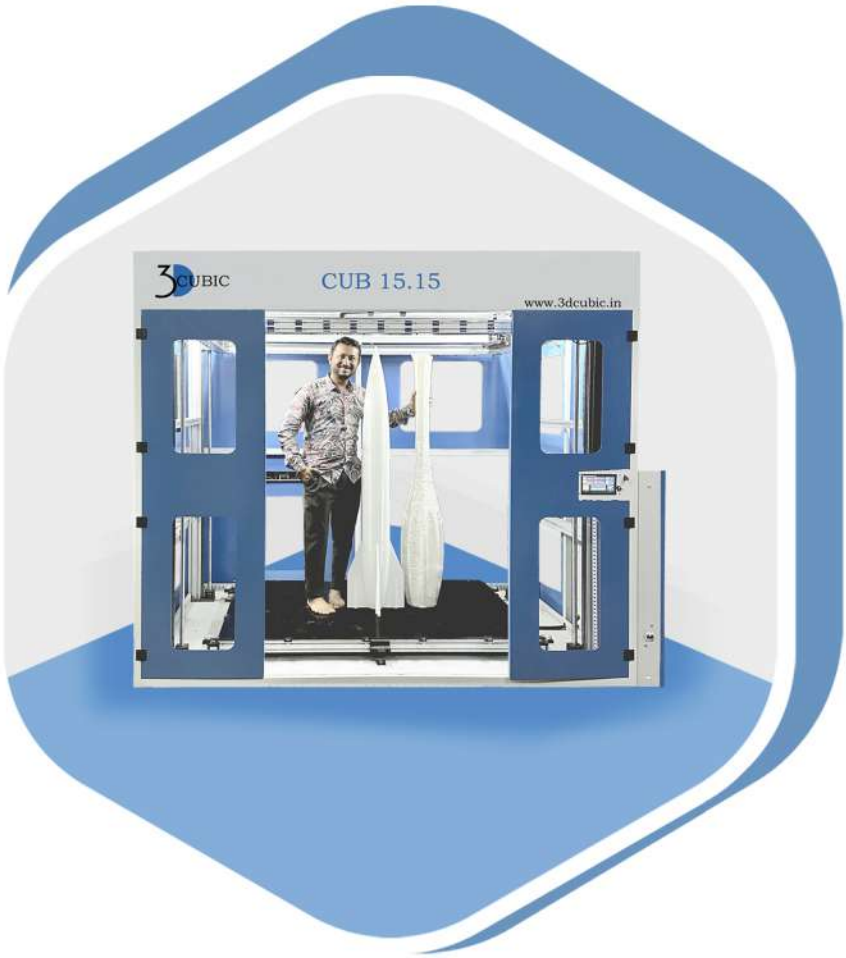

TECH SPECS

BUILD SIZE
1500mm X 1500mm X 1500mm

NOZZLE DIAMETER
0.4mm- 1.2mm (Optional)

EXTRUDER
High Torque Direct Drive
Single (Upgradable to Duel)

PRINTING SPEED
200mm/s as per material

EXTRUDER TEMPERATURE
30-300 degree (Upgradable)

BED TEMPERATURE
30-150 degree

DIMENSIONS
2400 X 2100 X 2100mm

ACCURACY (Z LAYER HEIGHT)
80-600 Micron(Depends Nozzle)

CONNECTIVITY
USB, Udisk, SD Card,Wi-Fi

WEIGHT
570 Kg

INPUT
220V-4A-50Hz

MATERIAL COMPATIBILITY
(DIAMETER 1.75MM)
PLA+, ABS, PETG, HIPS, PVA
CARBON FIBER-COMPOSITE
PC,PP,TPU 90 SHORE, WOODEN FILL

XY AXIS- THK Linear Rail- Guide For Better Layer Resolution
Z AXIS - HIWIN Ball Screw for 80 Micron Resolution
Auto Bed Levelling
Resume Capacity on Power Failure & Filament Sensor
Touch Screen Display
On Board RESET Switch for Emergency Stop
Powder Coated Robust Structure with Internal LED
Support- Windows (7/8/10/11) Mac OS
Installation & Training+Trobleshooting with On site 1 Year Warrenty
3D Printer Accessories (Free of Cost)



WHY US

An ISO 9001:2015 Certified Company,
GEM / E Procurment / N Procurment registered Company
CE, NSIC, ROHS,TM, MSME Certified Company
In house R&D facility with 7+ year Experience in 3d Industry
We believe in Quality product with giving fast Service &
Support after sell Manufacturing Customize Machine size

| OUR VALUABLE CLIENTS |

OUR CLIENTS

SAHAS
EMPOWER THE NEW

STPL 3D
THINK • CREATE • SURPRISE

cubēin

DIAM

MAX SPARE
LIMITED
QUALITY. PRECISION. SPEED.

adani

Garden VARELI

Godrej

Joy e-bike

BRAHMA3

MAXMILL
Technologies

3D MILKYWAY
WE PRINT IMAGINATIONS

SIMPLE ENERGY
REDEFINING ELECTRIC MOBILITY

1 HAIR STOP
INDIA

3D MASTERS

WOXSEN UNIVERSITY

AUR03D

Think & Build Rich!
Atelier 3D services®

PEAK TACH
ENGINEERS

Creative Trendz
PRIVATE LIMITED

AM eM
ANAND Mando eMobility

ECO PLANET

An ISO 9001:2015 certified company
PARIHAR FABRICATION
Parihar blower & fan system

SED

CUBIC SERIES

