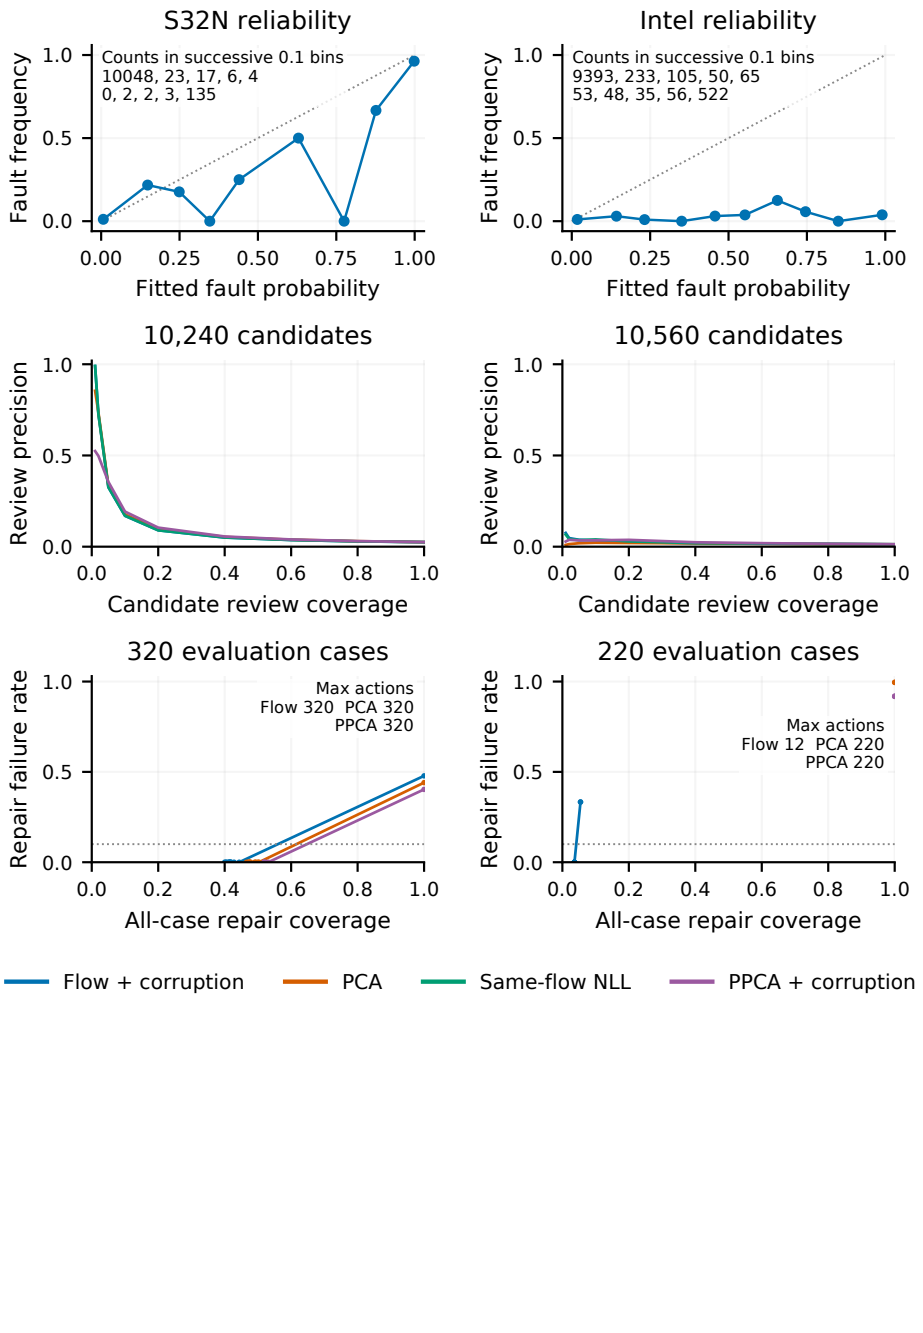
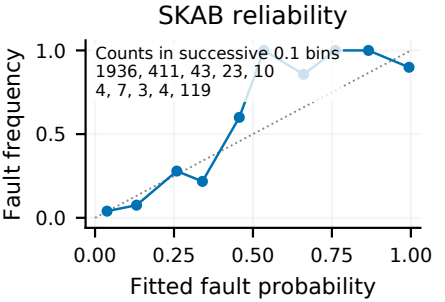
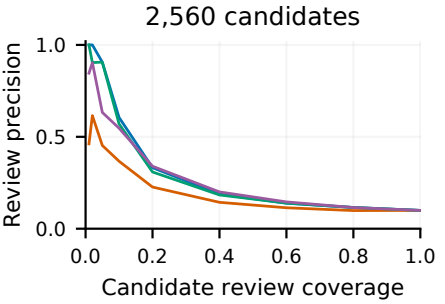
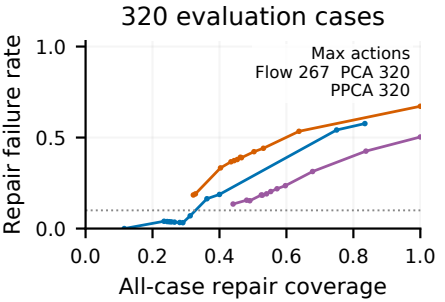

S32N reliability
Counts in successive 0.1 bins
10048, 23, 17, 6, 4
0, 2, 2, 3, 135
Fault frequency
Fitted fault probability
Intel reliability
Counts in successive 0.1 bins
9393, 233, 105, 50, 65
53, 48, 35, 56, 522
Fault frequency
Fitted fault probability
10,240 candidates
Review precision
Candidate review coverage
10,560 candidates
Review precision
Candidate review coverage
320 evaluation cases
Max actions
Flow 320 PCA 320
PPCA 320
Repair failure rate
All-case repair coverage
220 evaluation cases
Max actions
Flow 12 PCA 220
PPCA 220
Repair failure rate
All-case repair coverage
Flow + corruption
PCA
Same-flow NLL
PPCA + corruption


SKAB reliability
Counts in successive 0.1 bins
1936, 411, 43, 23, 10
4, 7, 3, 4, 119
Fault frequency
1.0
0.5
0.0
0.00
0.25
0.50
0.75
1.00
Fitted fault probability


2,560 candidates
Review precision
1.0
0.5
0.0
0.0
0.2
0.4
0.6
0.8
1.0
Candidate review coverage


320 evaluation cases
Max actions
Flow 267 PCA 320
PPCA 320
Repair failure rate
1.0
0.5
0.0
0.0
0.2
0.4
0.6
0.8
1.0
All-case repair coverage