

ESTABLISHING A NEW STANDARD IN THE COMERCIAL REFRIGERATION INDUSTRY

With its large display capacity, this three door cooler is one of the largest and most versatile in the market. The evolution of its temperature controller allows it to reach -4°C .

KEY FEATURES



IMBERALINK CONTROLLER

Imbera's intelligent controller and energy management device provides with data gathering and connectivity capabilities. Imberalink enables monitoring of technical and commercial performance for real-time decisions and for optimized ROI and TOC.

+COLD

+COLD

With the evolution of Imbera's controller technology the cooler pulls down to -4°C degrees for a great consumption experience.



HC REFRIGERANT

The cooler is equipped with an environmentally friendly HFC-free cooling system with hydrocarbon refrigeration.




ELECTRONIC FAN MOTORS

Enhances performance and efficiency. Uses only a fraction of the energy and offers longer life expectancy than industry standard shaded-pole motors.




LOW MAINTENANCE CONDENSER

New 5th generation constant power ultra-high efficiency LED uses lowest energy possible, with highest light output.



HIGH EFFICIENCY DOORS

Uses a double tempered glass panel with Argon gas and Low-E film, which reduces the transfer of heat by radiation.



LED LIGHTING

Environmentally friendly CFC -free insulating foam with high efficiency performance.



PLASTIC FRONT GRILL

The plastic front grill provides with improved durability and resistance to impact. This corrosion -free material doesn't discolor over time and the material can be recycled at the end of its lifespan.



TECHNICAL SPECIFICATIONS

Exterior dimensions	Internal dimensions	Usable interior capacity
H: 80 7/10" (205cm)	H: 60 1/10" (153cm)	H: 52 3/5" (134cm)
W: 78 7/10" (200cm)	W: 74 7/10" (190cm)	W: 72" (183cm)
D: 33 1/2" (85cm)	D: 27 3/10" (69cm)	D: 23 1/2" (60cm)

Usable volume	51.4 ft ³ (1456 lts)
Doors	3
Door construction	Plastic frame
Shelves	12
Shelf size	W: 24 1/2" (62cm) D: 22 1/10" (56cm)
External material	Pre-painted steel
Internal material	Pre-painted steel

DATA CAPACITY**

325 ml (10 oz) bottle capacity

Total: 1350

Front: 10

Display: 147

355 ml (12 oz) can capacity

Total: 2112

Front: 18

Display: 264

REFRIGERATION PERFORMANCE DATA

Refrigerant	R290 6.3oz (0.18 kg)
Energy consumption	16.7 kwh / 24 h
Compressor power	1/2+ HP 1060 watts
Condenser	Finless
Thermostat setting default	Cut-out 24.8°F (-4°C) Cut-in 32°F (°C)

ELECTRICAL DATA


Power supply	115V / 60 Hz
Amps	15.1
Length of cord	98" (250cm)
Lighting	6 modules 144 total LED's
Plug type 	B
Controller	CIL

LOGISTIC DATA


Trailer loads	20': 7 40': 14 53': 19
Unit weight w/packaging	716.5 lb (325kg)
Dimensions w/packaging	H: 80 7/10" (205cm) W: 79 9/10" (203cm) D: 34 4/5" (89cm)

PRODUCT VIEWS


Front view

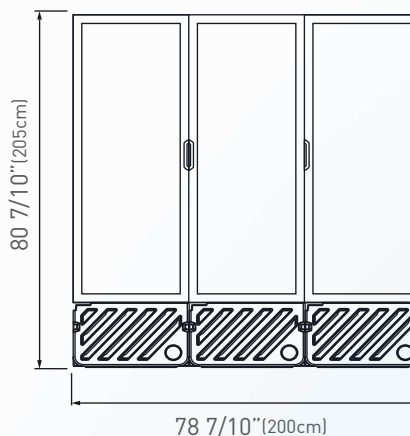

Side view

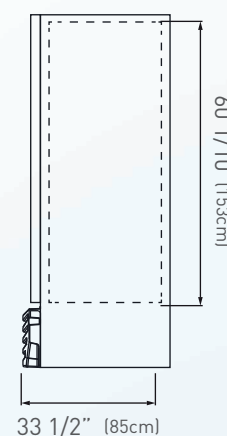

Top view

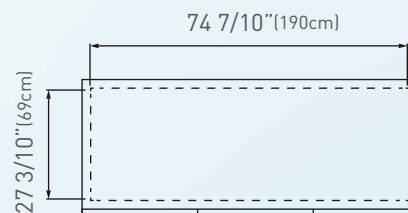

*Energy consumption based on C condition
 *BMAD System (Low maintenance high performance)
 *Dimensions rounded up to the nearest inch or millimeter
 *Specifications subject to change without notice
 *H: Height, W: Width, D: Depth
 **Product capacity expressed at its highest level

Customer service and warranty

Operators must follow installation and operational guidelines per Imbera Users Manual
 Each cooler must be connected directly to a single power supply, otherwise warranty will be voided
 19/03/2020