

Full Glass Vertical Cooler

New platform that maximizes product display and increases capacity due to its improved dimensions that make better use of the available footprint.



CCV376PP R2

Key Features

ImberaLink Controller

Imbera's intelligent controller and energy management device provides with data gathering and connectivity capabilities. Imberalink enables monitoring of technical and commercial performance for real-time decisions and for optimized ROI and TOC.

+COLD

With the evolution of Imbera's controller technology the cooler pulls down to -4 C degrees for a great consumption experience.

HC REFRIGERANT

The cooler is equipped with an environmentally friendly HFC-free cooling system with hydro-carbon refrigeration.

Electronic Fan Motors

Allow better performance by using only a fraction of the power required by a shaded-pole motor.

Low Maintenance Condenser

Prevents dust from blocking the air flow, generating energy savings and increasing the compressor's life.

High Efficiency Doors

Uses a double tempered glass panel with Argon gas and Low-E film, which reduces the transfer of heat by radiation.

Cyclopentane Insulating Foam

Environmentally friendly CFC -free insulating foam with high efficiency performance.

Variable Speed Compressor

Adjusts its capacity depending on the cooling requirements, so it can save up to an additional 30% in energy consumption.

CCV376PP R2

Technical Specifications


External Dimensions (cm)	H:	200
	W:	60
	D:	77
Internal Dimensions (cm)	H:	178
	W:	50
	D:	66
Volume (L)		538
Container Capacity	20':	27
	40':	54
	53':	72
Doors		1
Shelves		5
325ml bottle capacity	Total:	344**
	Front:	8
355ml can capacity	Total:	574
	Front:	8

Refrigeration System BMAR


Energy Consumption (kWh/24h)	5.070*
Refrigerant R290 (kg)	0.060
Compressor (W)	381
Evaporator	Dynamic
Temp. Range (°C)	-4 to 1

Electrical System


Amps (A)	4.4
Volts (V)	115
Frequency (Hz)	60
Lighting	LEDs
Cord Lengt (mm)	1500
Plug Type	NEMA 5-15P

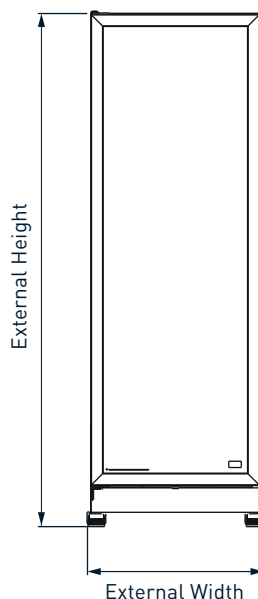


Front view

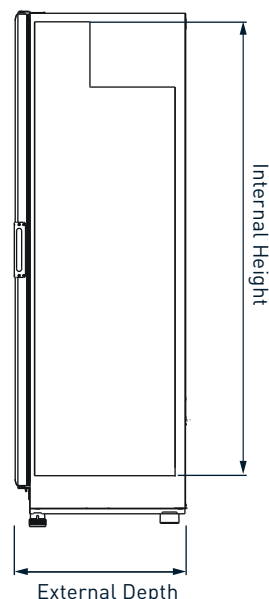

Side view

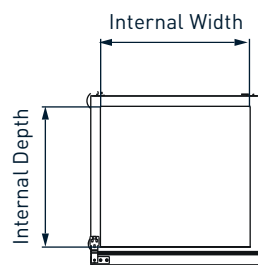

Top view



Human scale

PRELIMINARY

* Energy consumption based on Heineken norm in its D condition (PRELIMINARY)
(Maximum temperature of 40.6°C and 75% of relative humidity).

** Commercial capacity.

BMAR System (Low maintenance high performance).
Dimensions rounded up to the nearest inch or millimeter.
Specifications subject to change without notice.