


Apéndice C. Hoja de datos del motor de fémur y tibia

HP / Mabuchi C2162-60006

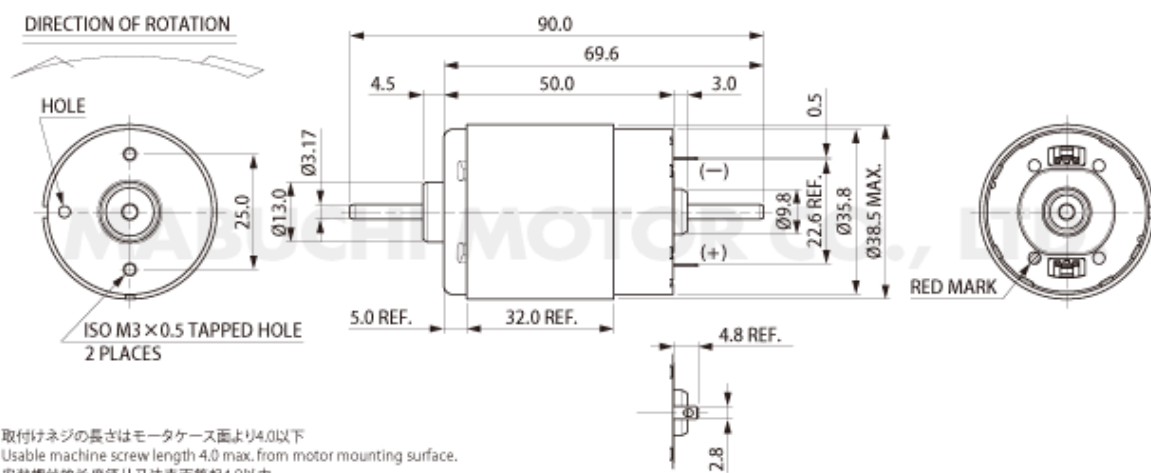

Plano aproximado. No corresponde al modelo.

Rating :	19V
Test:	24V
Stall Current:	2.5A
Stall Torque:	28.7 N-cm
No Load Speed:	4,550 RPM
Max Power:	34.2W
Duration:	30 sec
Energy:	1,026 J
Weight:	224 g
Power / Weight:	153 W/kg
Energy / Weight:	4,580 J/kg