
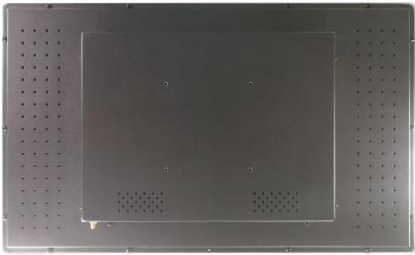



21.5 inch projected capacitive touch monitor

Model no.	Parameters		
  	<p>Display size: 21.5 inch</p> <p>Panel brand: LG/AUO</p> <p>Machine size: 519mm*311mm*41mm</p> <p>Display area: 476mmX268mm</p> <p>Display resolution: 1920*1080</p> <p>Life: ≥50000h</p> <p>Back light mode: LED</p> <p>Viewing angle: 85/85/85/85 U/D/L/R</p> <p>Brightness: 350cd/m</p> <p>Image ratio: 16:9</p> <p>Response time: 5ms</p> <p>Color: 16.7M</p> <p>Signal input mode: LVDS</p> <p>Chassis material: rugged metal housing, aluminum frame with advanced spray drawing process, 3mm tempered glass covered in front to protect LCD panel, IP65 waterproof and dustproof, perfect to use in public and industry</p> <p>Color: Silver/black</p> <p>Power supply: DC 12V</p> <p>Power consumption: 30W</p> <p>Standby power consumption: < 1W</p> <p>Audio output: 8Ω3W*2</p> <p>Motherboard configuration: System: display System</p> <p>External ports: 1 * USB2.0, 1 * HDMI Input, 1 * VGA, 2 * AUDIO Jack, 1 * USB for touch</p> <p>Touch configuration: Touch: 21.5" capacitive touch screen,</p>		

	<p>support 10 points</p> <p>Touch method: Finger, Touch pen≥3mm</p> <p>Response time: 4ms</p> <p>Life: Durability single point ≥ 50 million times touch</p> <p>Light resistance: full-angle anti-light exposure</p> <p>Physical resolution: 32768*32768</p> <p>Positioning accuracy: ≤±0.5mm</p> <p>Way of communication: Full speed USB</p> <p>Active touch area: 476mmX268mm</p> <p>VESA:100*100mm</p>		
--	--	--	--