



TOP ONE TECH LIMITED (HK)

32" LCD Open frame Touch Monitor

Model: TOT320UCA006

Part number:TOT320L1C001









Top One Tech's 32" open frame LCD touch monitors have a long-lasting product cycle because the enclosure is controlled by Top One Tech's specifications. Future panel improvements are therefore possible without external changes. The TOT320UCA006 integrate with the Top One Tech's PCAP technology touchscreen.

Features

- Full HD Industrial LCD-panel with baclight LED
- Patented IP65 Front with silicon seal
- Anti-glare treatment (chemical etching)
- Strengthened cover glass
- 10-finger-multi touch capacitive touch
- Screwable connection for rugged environments



Specification

Model No.	TOT320UCA006
IP rated front panel	IP65
Screen diagonal (Inch/cm):	31.5/80.01
Display active screen size:	69.84x39.29
Aspect ratio:	16:9
Physical resolution:	1920×1080
Colours displayed:	16.7M
Brightness (cd/m2):	350
Contrast:	3000:1
Typical reaction time Tr/ Tf:	6/6(ms)
Visual Angle horizontal/vertical :	178/178(°)
Backlight / Backlight Lifetime (hours):	LED / 40,000
Touch Technology	Projected Capacitive 10-point Multitouch
Touch Connector	USB
Touch Panel Drivers	Windows; Linux; Mac; Android








Touch Life (Contacts)	Unlimited
Surface Hardness	7H
Operating Temperature	-10 ~ +65(° C)
Humidity Range (RH)	10%-90%
Net weight (kg)	17
Gross weight (kg)	21 (incl. cartonage)
Housing material	Aluminum
Housing (cm) LxWxH	76.47*45.93*5.42
Mounting	VESA 100/ VESA 75
Power Indicator	Green LED
Power Supply	100-240V ACDC active switch- ing; 12V DC-Out
Working Power (V)	24
Pow Consumption (W)	65
Stand-By Consumption (W)	<0.5
	1x VGA
	1x DVI-D
Video	1x HDMI 1.1 (incl. HDCP)
Audio	1x PC-Audio
	1x Earphone-Out
Touch Connector	1x USB
Connectors	1x 12V DC-IN
Regular Warranty	1 year

NOTE: The display SPEC. will change follow the relevant LCD panel brand and model

Mechanical Dimensions

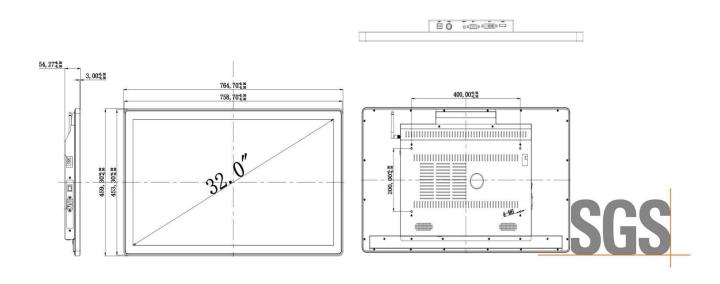







Power Cable: A North American power cable or an European power cable is included according to the end user's area.

Power Supply Brick: A power supply brick is included.

Touch/Video/DVI Cables: Detachable serial or USB touch cable, video cable or DVI cable are included



Typical Application

Gaming/Casino Systems Outdoor and indoor Kiosks Entertainment Transport and Ticketing Hospitality Banking **Customizsed Solutions**



How to contact us

TOP ONE TECH LIMITED (HK)

Contact: sales@toponetech.cn

Tel:0086-755-21070641 Cell:0086-

136316 106 95

China Address1:

Room512&Room517, Taiyangneng Guigu Building, Zhongxing Xiaoqu, Yunfeng Road No.

3, Gaofeng Shequ, Longhua District, Shenzhen, China

China Address2:No. 2, Guihua Jiayi Industrial district, Guanlan, Longhua, Shenzhen, Chi na 51804

HK Address:Le Unit 5,27/F Richmond Comm BLDG 109 Argyle ST Mongkok KLN,Ho ng Kong

