

# **TOP ONE TECH LIMITED (HK)**

## **21.5" LCD Open Frame PCAP Touch Monitor**

**(PCAP and Zero-bezel Type)**

**Model: TOT215UCA006**

Part number:TOT215L1C001



Top One Tech's 21.5" open frame LCD touch monitors have a long-lasting product cycle because the enclosure is controlled by Top One Tech's specifications. Future panel improvements are therefore possible without external changes. The TOT215UCA006 integrate with the Top One Tech's PCAP technology touchscreen.

## **Features**

- Patented IP65 Front with silicon seal
- Long lasting product cycle-enclosure controlled by Top One Tech's specifications
- FullHD Industrial LCD-panel with backlight LED
- Strengthened cover glass
- Multiple mounting options including VESA mount, horizontal or vertical bracket-mount
- Compact and slim profile for easy integration from side,top and bottom
- Top One Tech's PCAP technology on pure glass for the ultimate in image quality
- Finger or gloved hand operation
- 10-finger-multi touch capacitive touch
- Driver support for all the current operating systems
- Screwable connection for rugged environments


## **Specification**

<b>Model No.</b>	TOT215UCA006	
<b>IP rated front panel</b>	IP65	
<b>Screen diagonal (Inch/cm):</b>	21.5/54.69	
<b>Display active screen size:</b>	47.70×26.80cm	
<b>Aspect Ratio</b>	16:9	
<b>Suggested Resolution</b>	1920×1080@60Hz	
<b>Maximum showable resolution (TPCs: external):</b>	1920×1200	
<b>Support Colors</b>	16.7M	
<b>Brightness(Typ.)</b>	250	
<b>Response Time(Typ.)</b>	1.5/3.5 (ms)	
<b>Backlight / Backlight Lifetime (hours):</b>	LED / 40,000	
<b>Viewing Angle (Typ.at CR&gt;10))</b>	Horizontal(left/right)	85°/85°
	Vertical(up/down)	80°/80°
<b>Contrast Ratio(Typ.)</b>	1000:1	
<b>Touch Technology</b>	Projected Capacitive 10-point Multitouch	
<b>Touch Panel Drivers</b>	Windows; Linux; Mac; Android	
<b>Touch Connector</b>	USB	
<b>Surface Hardness</b>	7H	
<b>Power Supply</b>	100-240V ACDC active switch- ing; 12V DC-Out	

<b>Environment</b>	Operating Temp.	-10~65°C
	Storage Temp.	-10~65°C
	Operating RH:	10%~90%
	Storage RH:	10%~90%
<b>MTBF</b>	30,000 Hours demonstrated	
<b>Net weight (kg)</b>	7.3	
<b>Mount Options:</b>	VESA 100/ VESA 75	
<b>Housing material</b>	Plastic and metal	
<b>Housing (cm) LxWxH</b>	52.64x32.23x4.95	
<b>Power Consumption (W)</b>	28	
<b>Agency Approval</b>	CCC,ETL,FCC,CE,RoHS	
<b>Regular Warranty</b>	1 year	

**NOTE:**The display SPEC. will change follow the relevant LCD panel brand and model

## Mechanical Dimensions

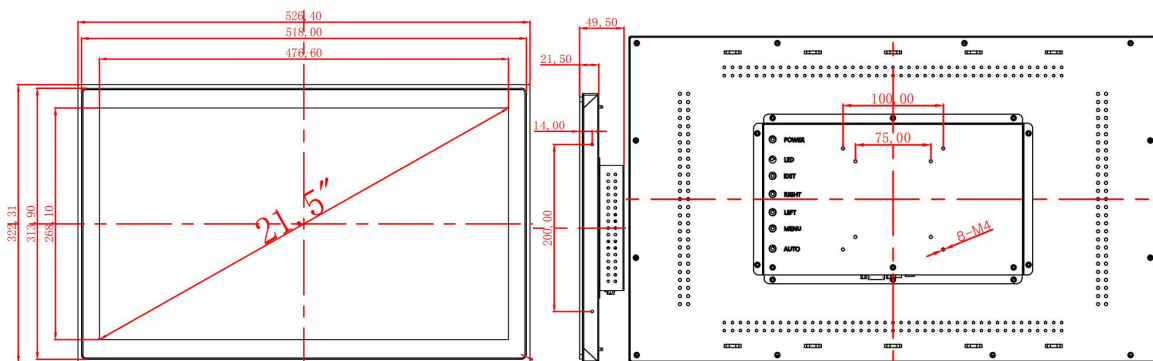

## Accessories

**Power Cable:** A North American power cable or an European power cable is included according to the end user's area.

**Power Supply Brick:** A power supply brick is included.

**Touch/Video/DVI Cables:** Detachable serial or USB touch cable, video cable and DVI cable are included

**L-brackets:** Four standard L-brackets are included.

## Typical Application

Information Kiosk  
Banking ATM  
Casino Gaming machine  
Industrial Control  
Transportation  
Education and Training

## How to contact us

TOP ONE TECH LIMITED

Mobile Phone : (+86)13631610695

Tel: 0086-0755-21070641

Whatsapp/Wechat :+8613631610695

Email : sales@toponetech.cn

Skype : elsieyu-sz@hotmail.com

Office in China : Room 512 & 517, Taiyangneng Guigu Building Zhongxing Xiaoqu, Yunfeng Road No.3 Gaofeng shequ, Longhua District, Shenzhen, China

Facilities in China : No. 2, Guihua Jiayi Industrial district, Guanlan, Longhua, Shenzhen, China 51804