Data sheet
testo 103

Be sure. testo

# Folding thermometer

testo 103 – The smallest folding thermometer in its class

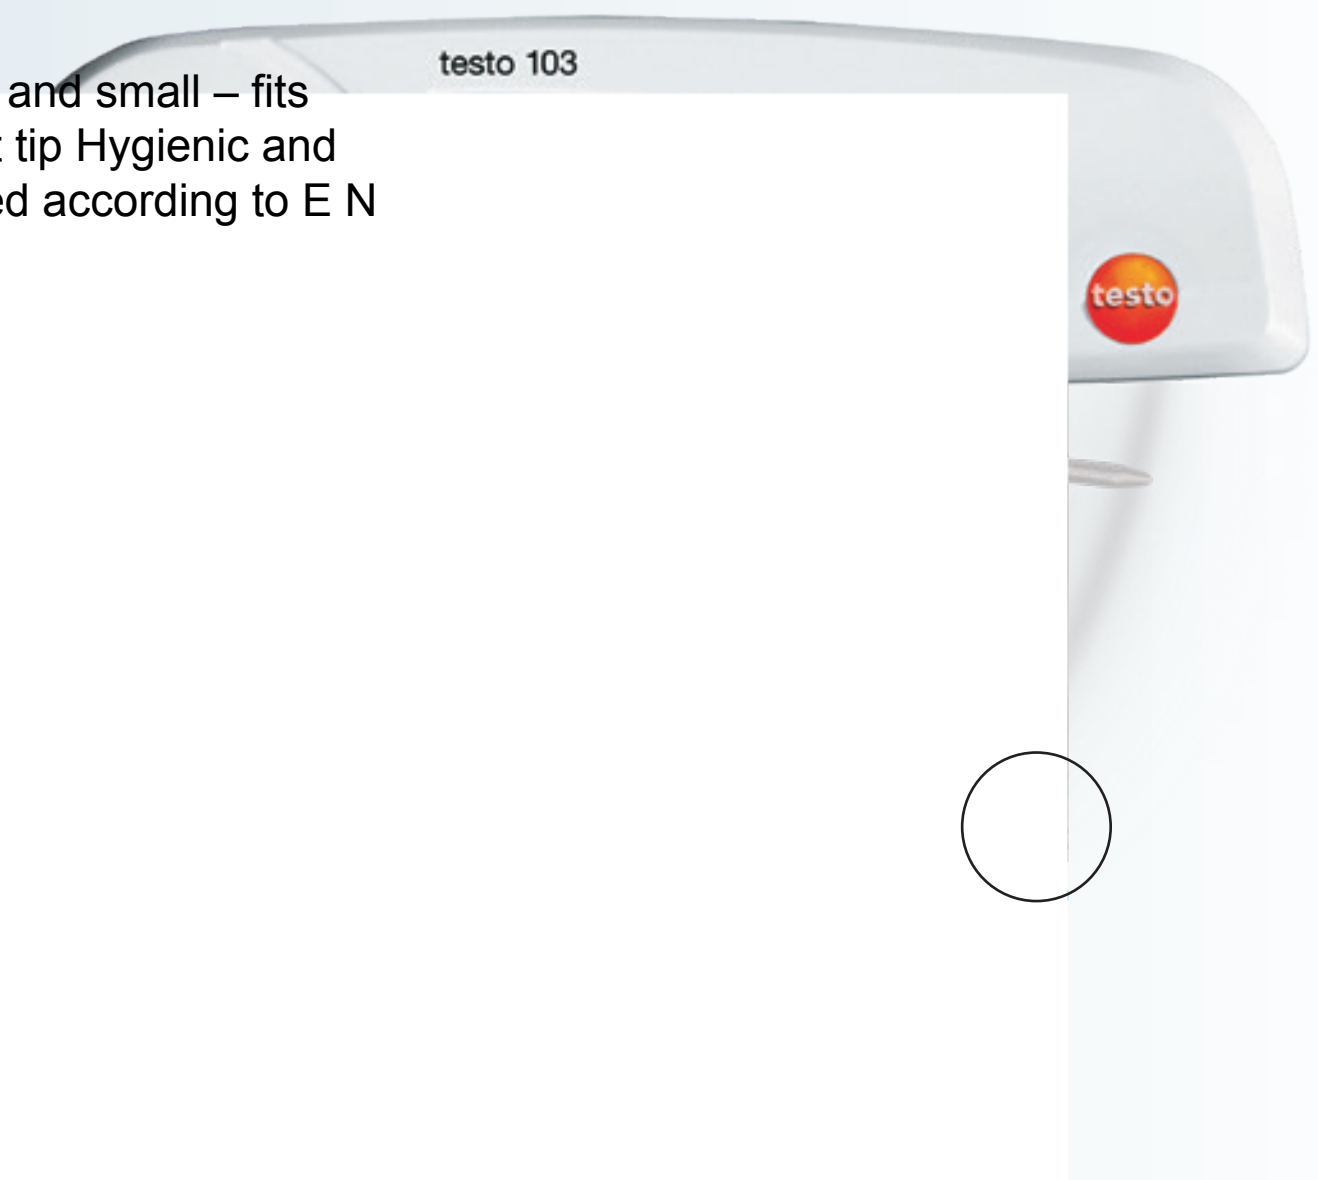


- Ideally suited for applications in the food sector
- Easy to operate
- Handy and small – fits in any trouser or jacket pocket
- Robust probe with narrow measurement tip
- Hygienic and easy-to-clean measurement tip
- Splash-proof according to I P55
- Certified according to E N 13485

°C I P55

At a length of 11 cm, the testo 103 is the smallest folding thermometer in its class. It hardly takes up any space, so you can simply stow it in your breast or trouser pocket. That way, it is always quickly available and close to hand. The small folding thermometer is immediately ready to measure after folding out to an angle of greater than 30°, and is therefore flexible in its application. After measurement, the probe can simply be folded away and stored safely until the next measurement.

The folding thermometer testo 103 is conform to H AC CP and E N 13485. Its narrow measurement tip leaves only small punctures in the foodstuffs, making it optimally suitable for spot checks – for example in production, storage and processing, in gastronomy, in supermarket chains, in food retail or in industry.

Be sure. testo

# Technical data

Sensor type N TC testo 103-30 to +220 °C Measuring range ±0.5 °C (-30 to +99.9 °C)Accuracy

±1 digit ±1 % of m.v. (+100 to +220 °C)The testo 103 the smallest folding 8102.10/I/psm/4649thermometer of its class! 0.1 °C / °F ResolutionIt offers handy, practical and strong support when carrying out monitoring measurements. General technical data Part no. 0560 0103 Storage temperature-30 to +70 °C Operating temperature-20 to +60 °C 1890 Battery type 2 lithium batteries (C R2032) Battery life 300 h (at +25 °C) Dimensions 189 x 35 x 19 mm (probe folded out) 118 x 35 x 19 mm (probe folded away) Probe length/ 75 mm / Ø 3 mm diameter 22 mm / Ø 2.3 mmProbe tip diameter Display L CD, 1 line, non-illuminated Reaction time 10 s (in moving liquid) Switch on/off With folding mechanism (approx. 30°) / Auto off after 60 mins. Housing material A BS Weight 49 g Protection class I P55 .eciton Standard E N 13485 tuohtiwMeasuring cycle 0.5 s egnahc ot tcejbuS