

Neck




Middle

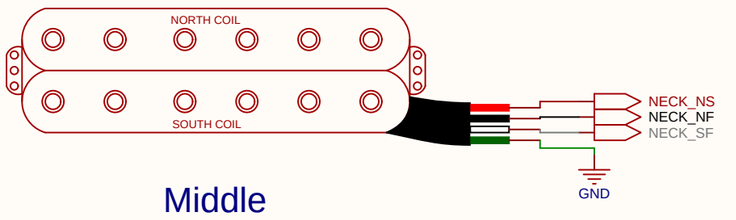


Bridge

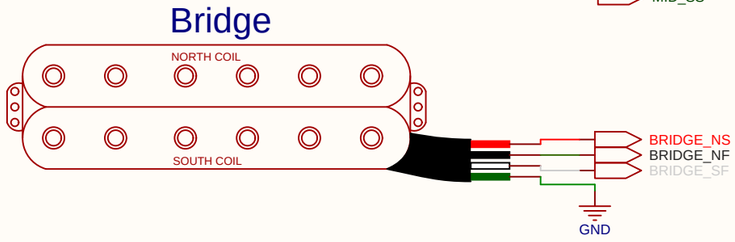





Pickup is active
If humbucker: internally wired in series



Humbucker wired in parallel




Pickup is out-of-phase and parallel to the others





Single Coil Simulation engaged

Superswitch



Ultraswitch




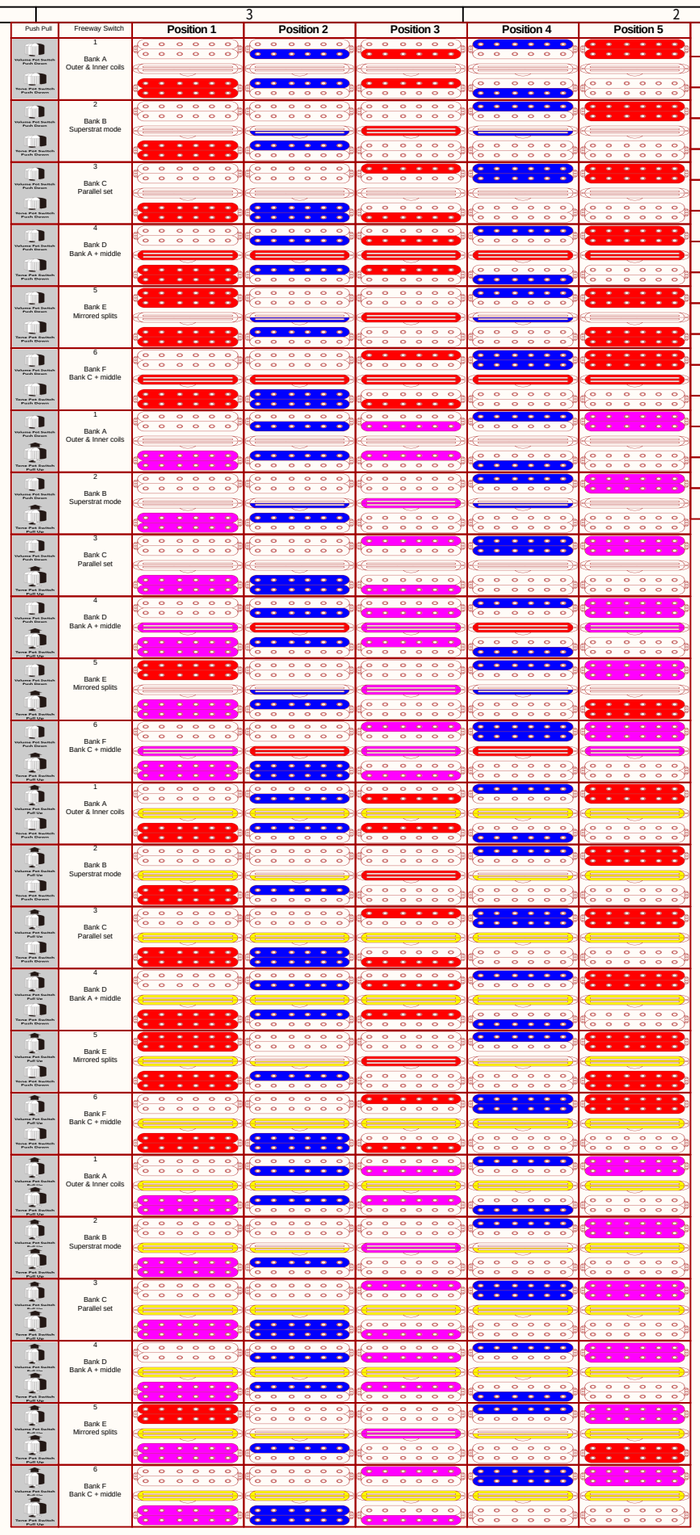

Bill of Materials


Item	Quantity
5-Way 6-Pole AxLabs Superswitch	1
6-Way Dual-Axis Freeway Ultraswitch	1
A500K DPDT Push/Pull Potentiometer	1
A500K 4PDT Push/Pull Potentiometer	1
12-Pin ON ON Toggle Switch	1
2-Pin Momentary Switch	1
Output Jack	1
150 kΩ Resistor	1
1.5 kΩ Resistor	1
680 pF Capacitor	1
22 nF Capacitor	1
33 nF Capacitor	1
47 nF Capacitor	1
100 nF Capacitor	1

Superswitch

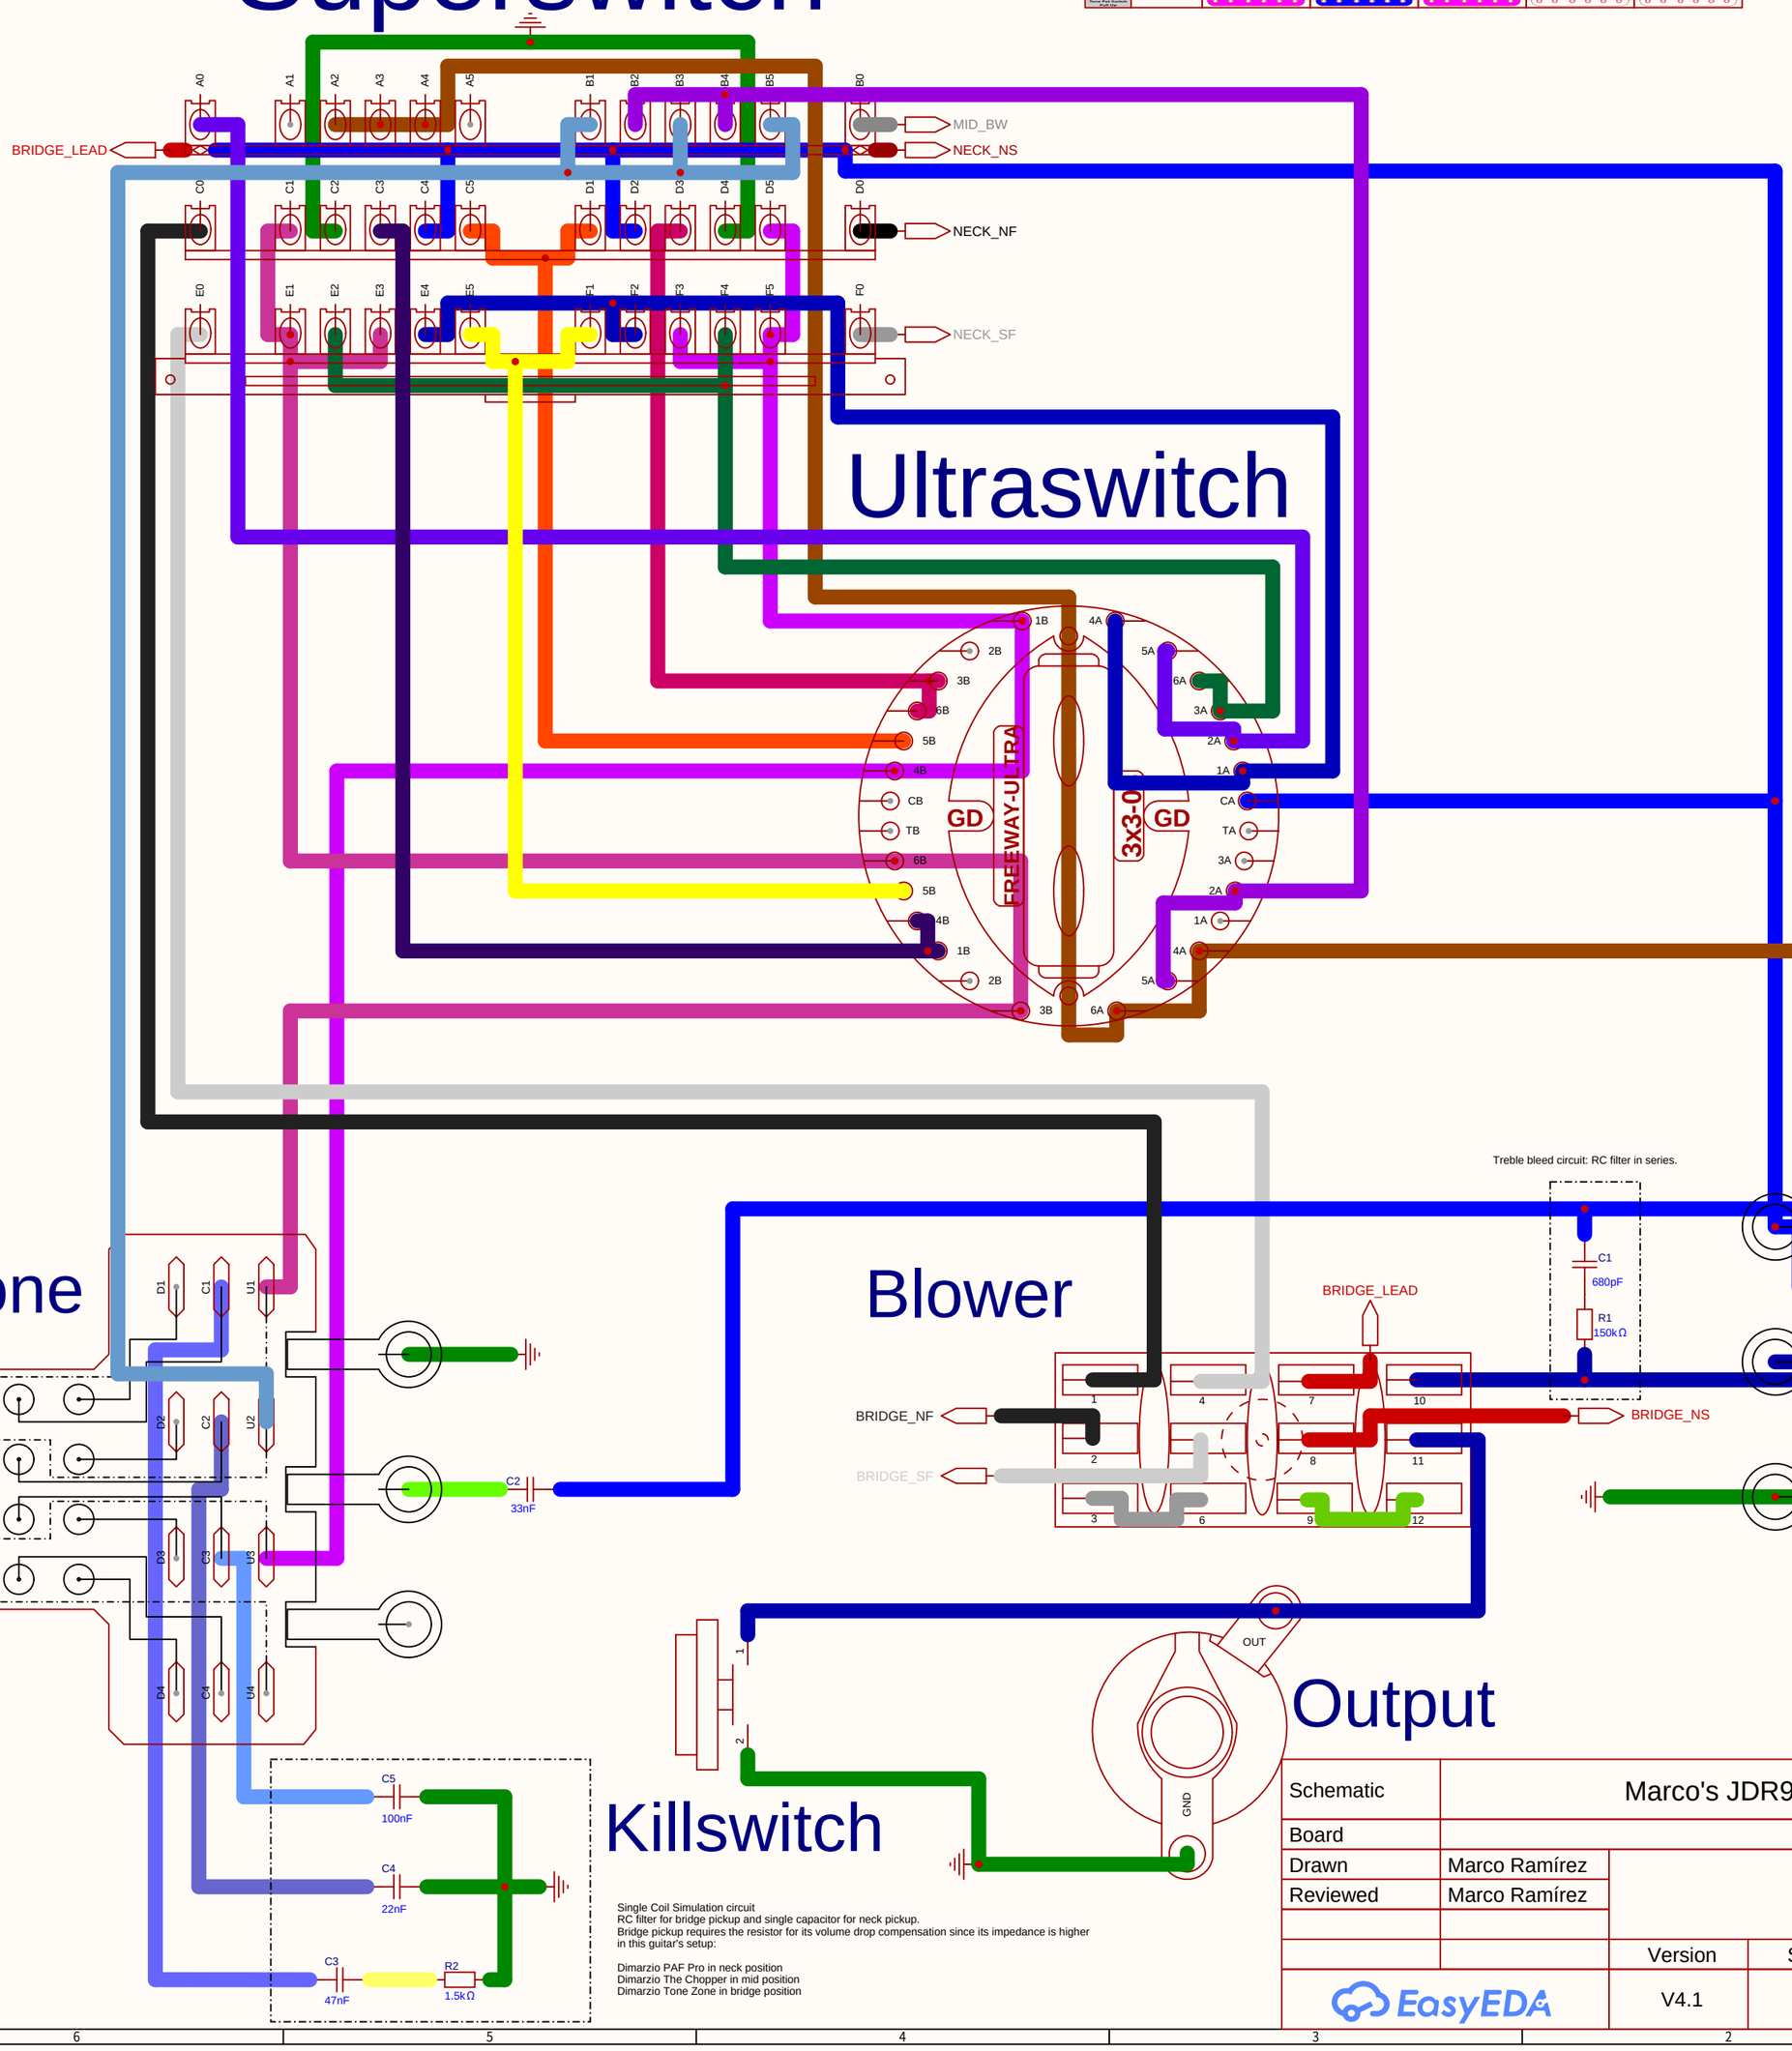


Ultraswitch

Volume

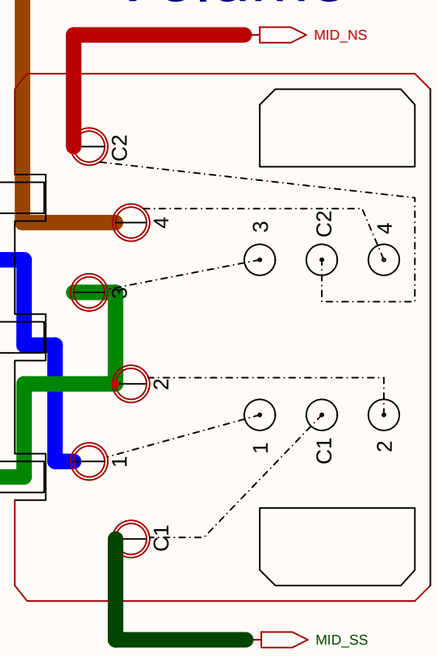

Tone

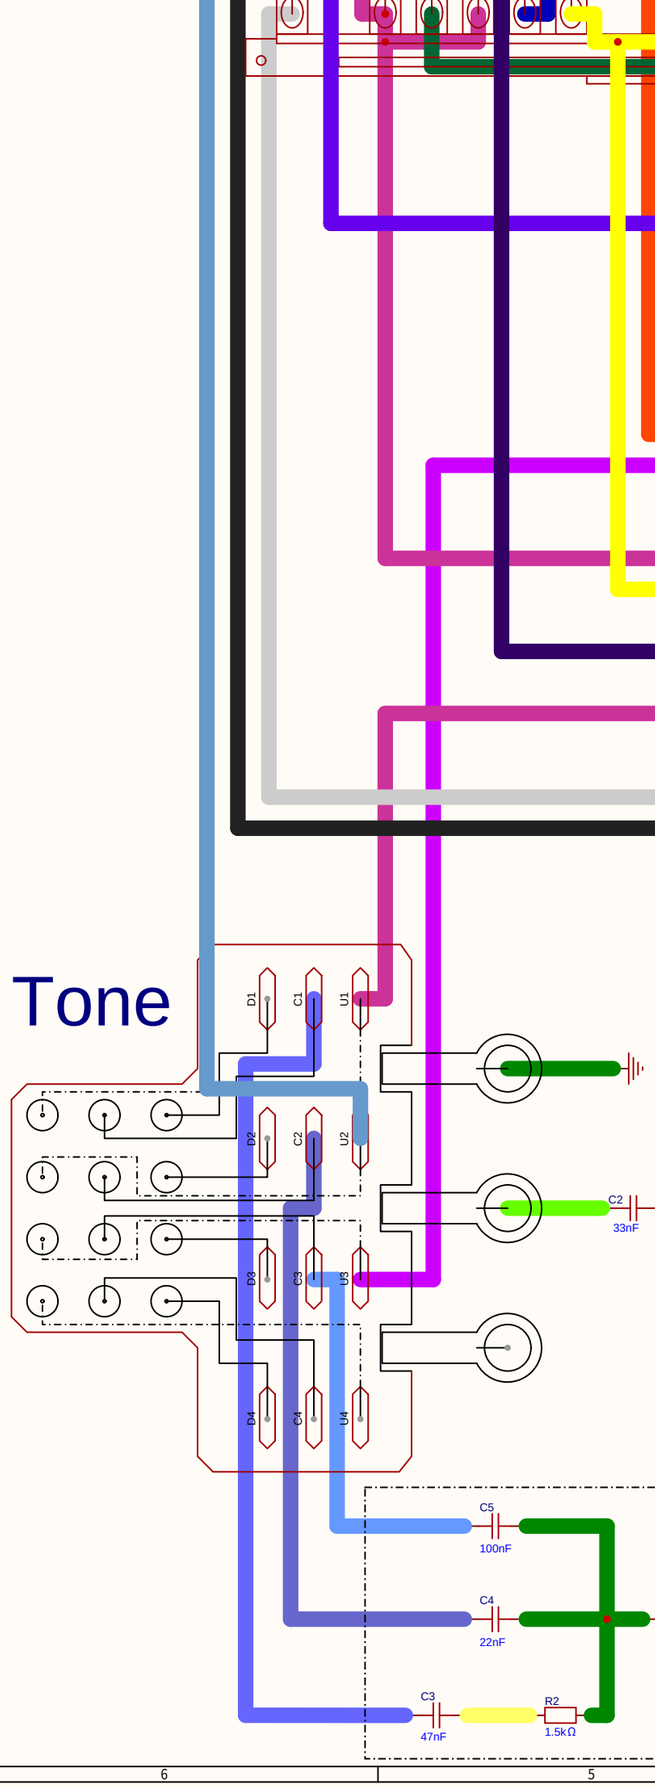

Blower

Treble bleed circuit: RC filter in series.

Killswitch

Output

Single Coil Simulation circuit
RC filter for bridge pickup and single capacitor for neck pickup.
Bridge pickup requires the resistor for its volume drop compensation since its impedance is higher in this guitar's setup:

Dimarzio PAF Pro in neck position
Dimarzio The Chopper in mid position
Dimarzio Tone Zone in bridge position

Schematic	Marco's JDR94	Create at	2026-11-04
		Update at	2026-11-10
Board		Page	P1
Drawn	Marco Ramírez	Guitars	
Reviewed	Marco Ramírez		
		Version	Size / Page 1 Total 1
EasyEDA		V4.1	A3 / EasyEDA.com