



LEFT SIDE VIEW (LADO IZQUIERDO)

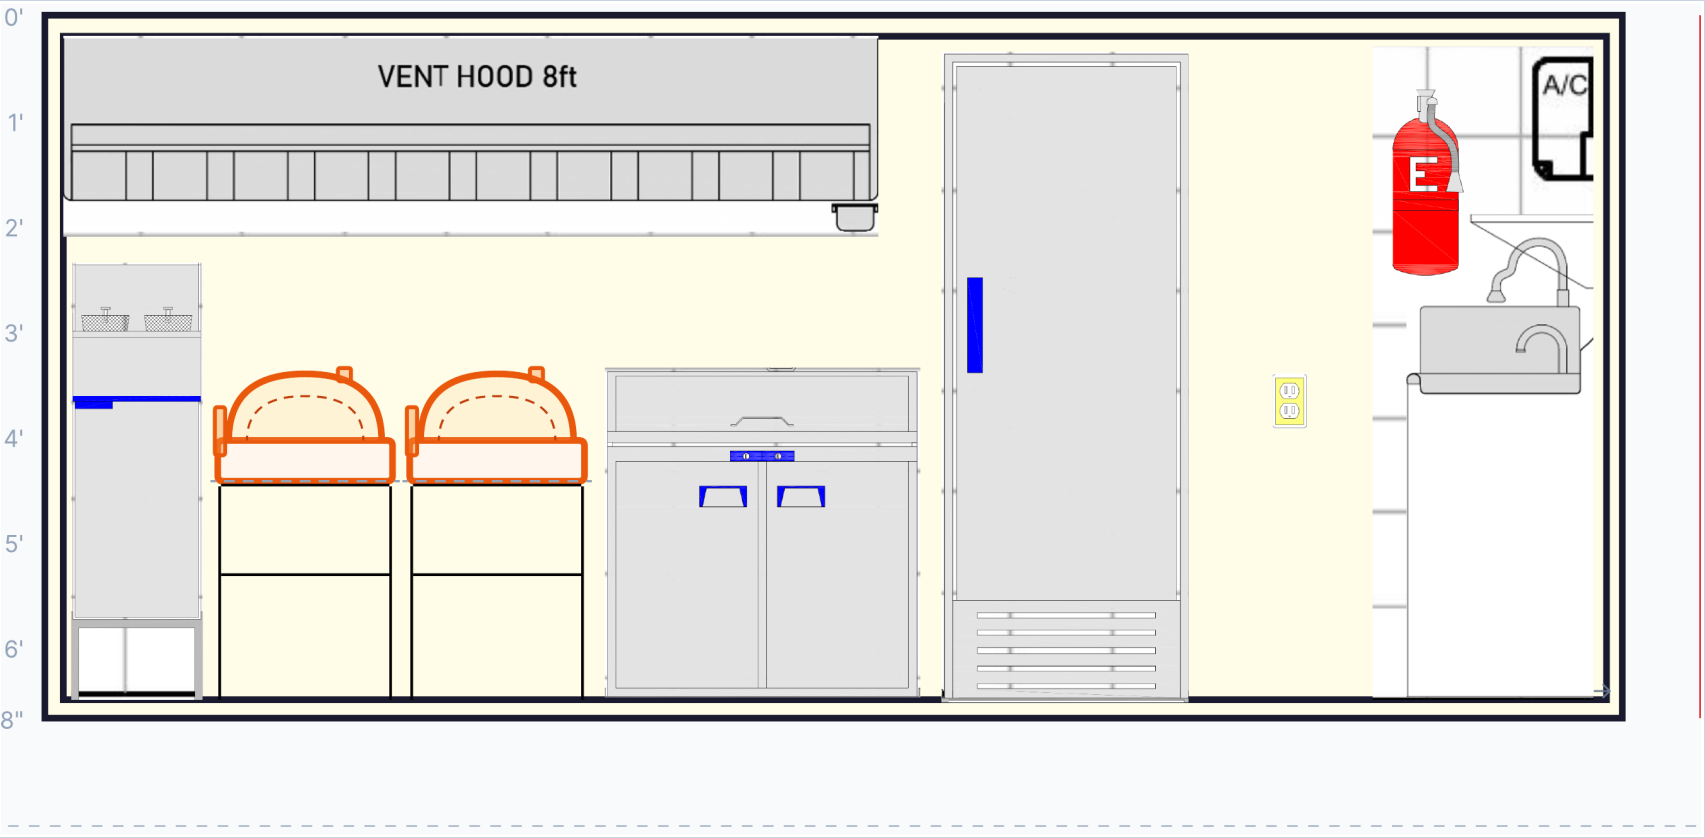

RIGHT SIDE VIEW (LADO DERECHO)

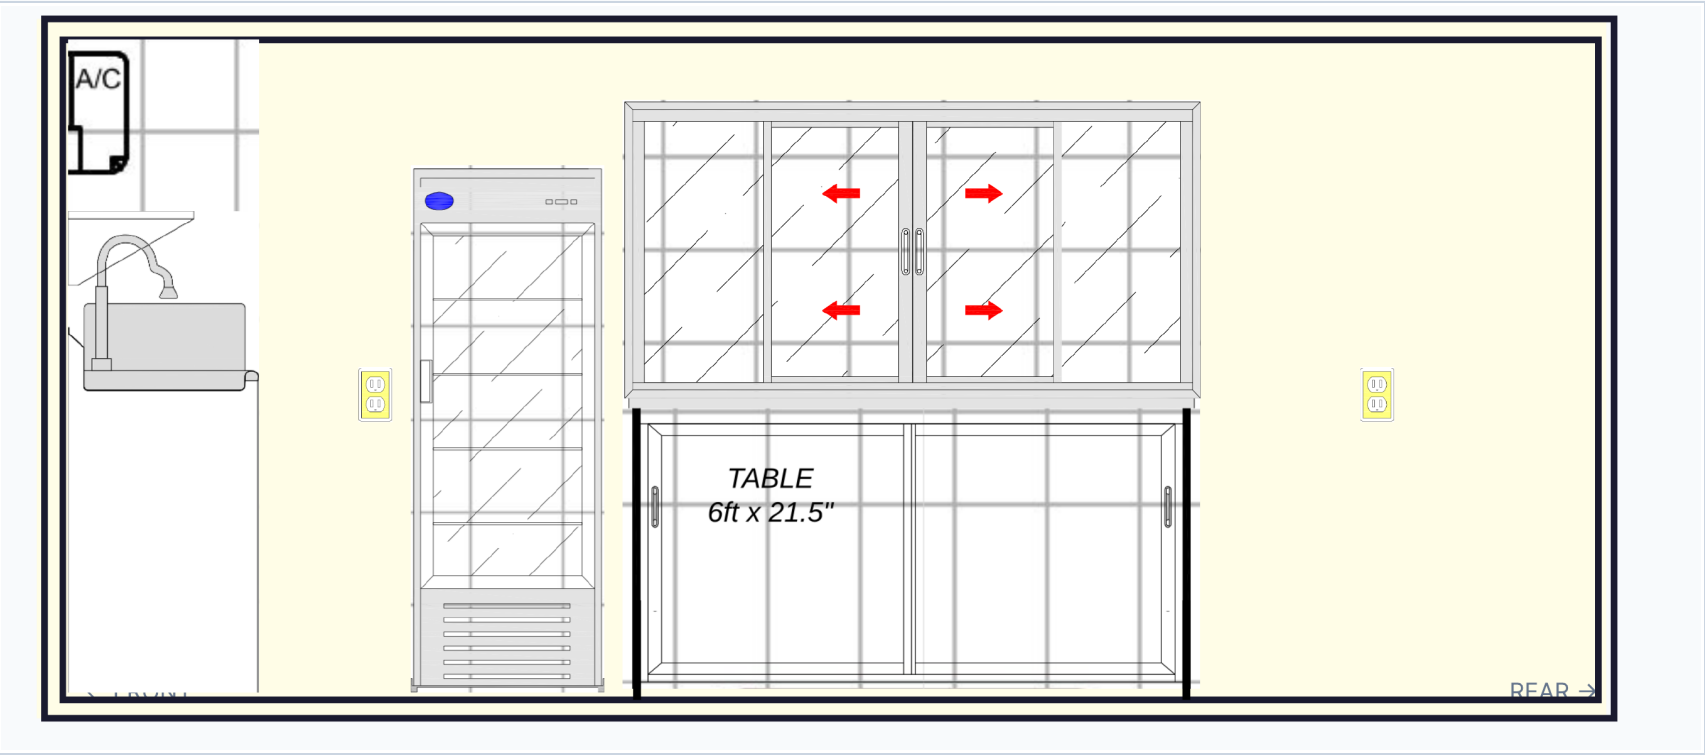

NSF COMMERCIAL HOOD

Type	Type I — grease rated
Length	8' 0" (2.44m)
Airflow	1,200 CFM
Material	430 Stainless Steel
Filters	SS baffle, removable
Suppression	Ansul R-102 system
Certification	NSF/ANSI 2 · UL 710

NSF SINKS

3-Comp. each	15"W × 15"D × 12"H
Material	18-ga 304 Stainless
Drainboards	Left & right, 18"
Hand sink	12×12" knee-valve
Certification	NSF/ANSI 2


INSULATED WALLS

Wall panels	Galvanized steel
Insulation	Polyurethane 2" (50mm)
R-Value	R-13 per inch
Interior	FRP food-grade
Floor	Diamond-plate alum.

VEHICLE / CHASSIS

Axle	Single, 3,500 lb
GVWR	7,000 lbs
Hitch	2-5/16" ball coupler
Brakes	Electric
Tires	ST225/75R15

TOP VIEW (PLANTA)

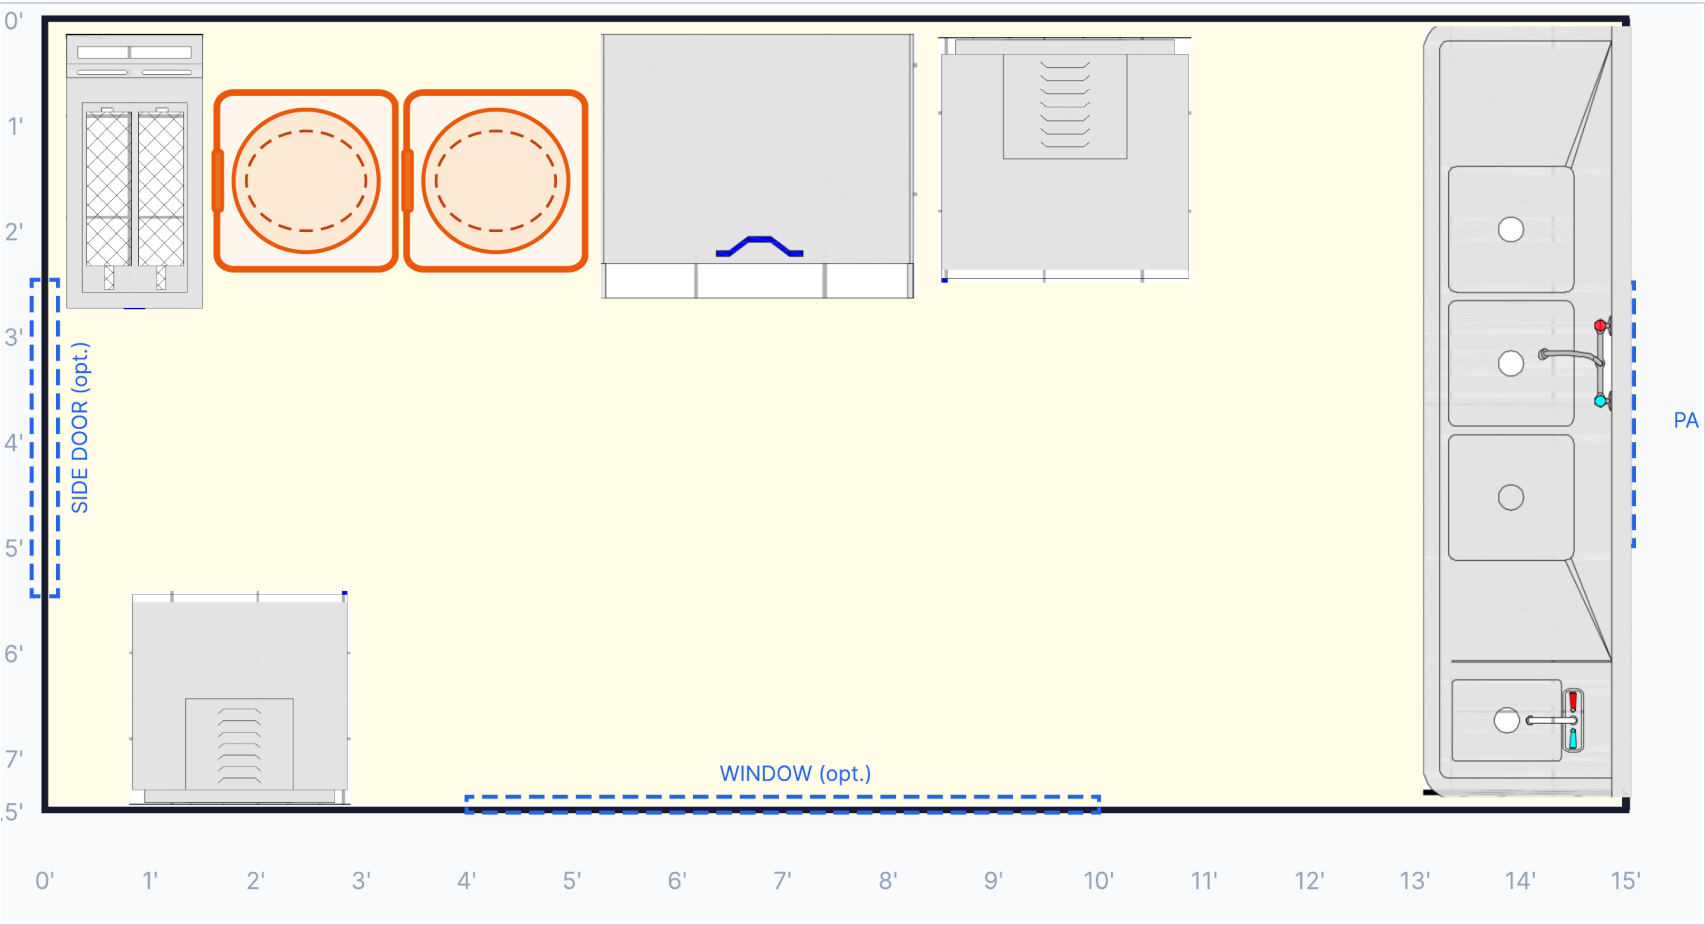

BOX SPECIFICATIONS

Interior length	15' 0" (4.57m)
Interior width	7' 6" (2.29m)
Interior height	6' 8" (2.03m)
Floor area	112.5 sq ft
Door opening	6'2"W × 6'0"H
Frame	Steel tube 2×3" welded
Ext. skin	Aluminum .040"
Service windows	2 — concession sliding

ELECTRICAL

Shore power	50A 120-240V · NEMA 14-50
Panel	100A main, 12-space
Lighting	LED recessed ×6
Receptacles	4×120V duplex, 1×240V
GFCI	All — NEC compliant


PLUMBING

Fresh water	30 gal — FDA poly
Waste water	50 gal — below floor
Pump	12V demand, 3.5 GPM
Water heater	6 gal — LP, 120°F
Grease trap	Under 3-comp sink

LEGEND

Box structure	Door / opening
Refrigeration	NSF Sink / plumbing
NSF Hood / exhaust	Fire safety

REAR VIEW (TRASERA)

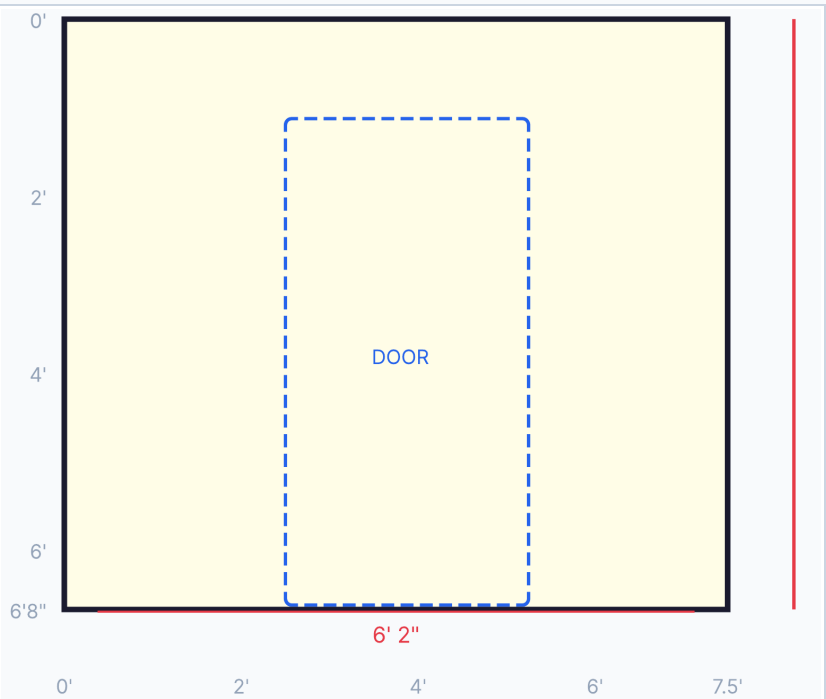

FRONT VIEW (FRENTE DE CAJA)

