



LEFT SIDE VIEW (LADO IZQUIERDO)

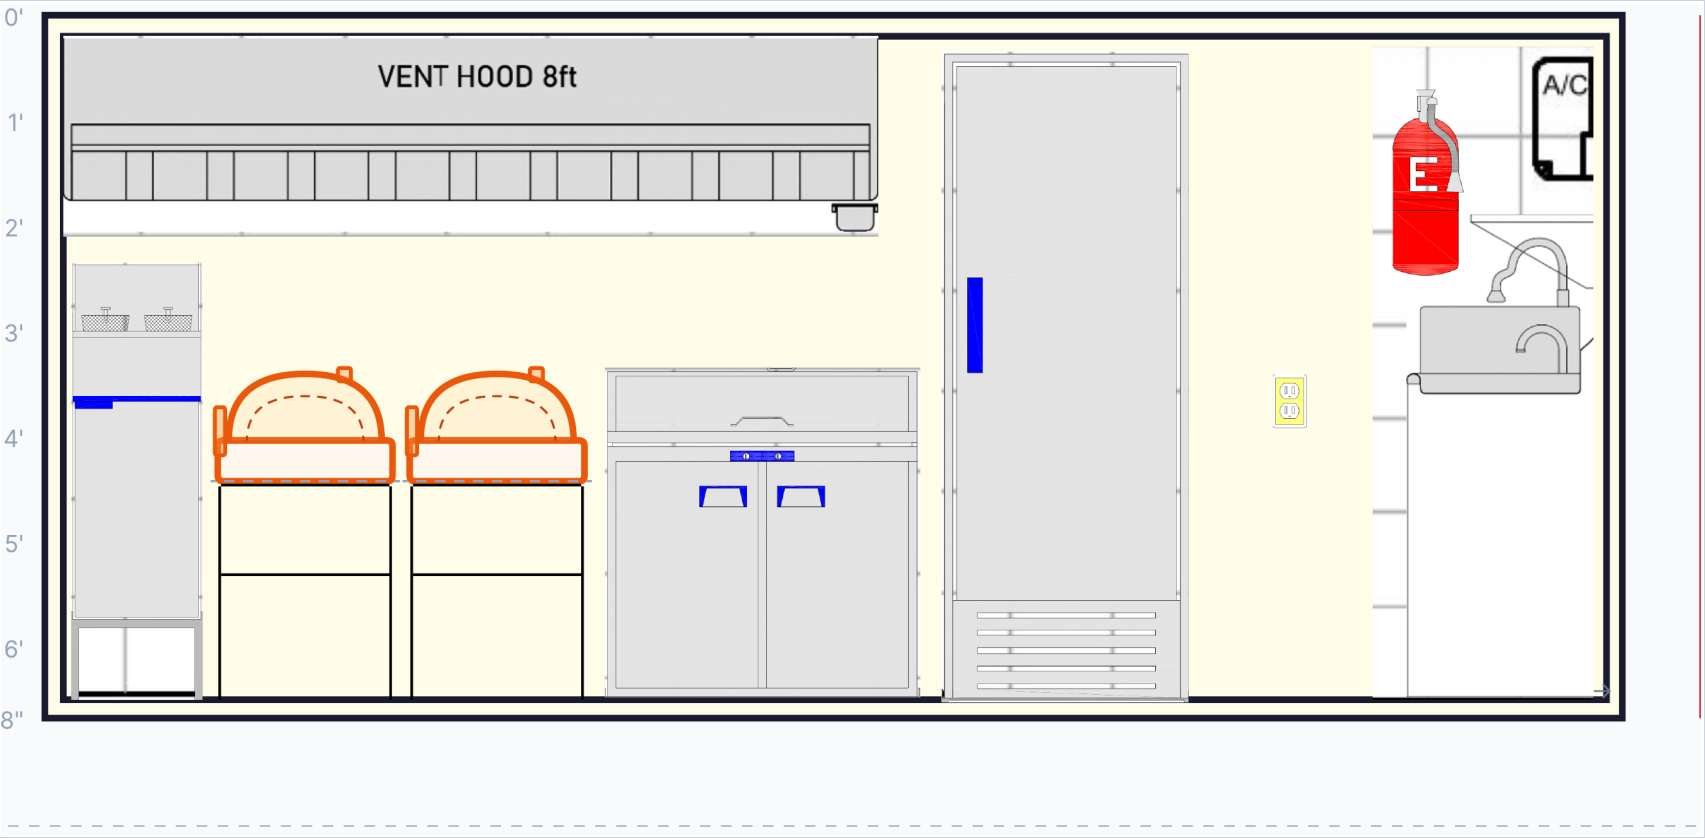

RIGHT SIDE VIEW (LADO DERECHO)

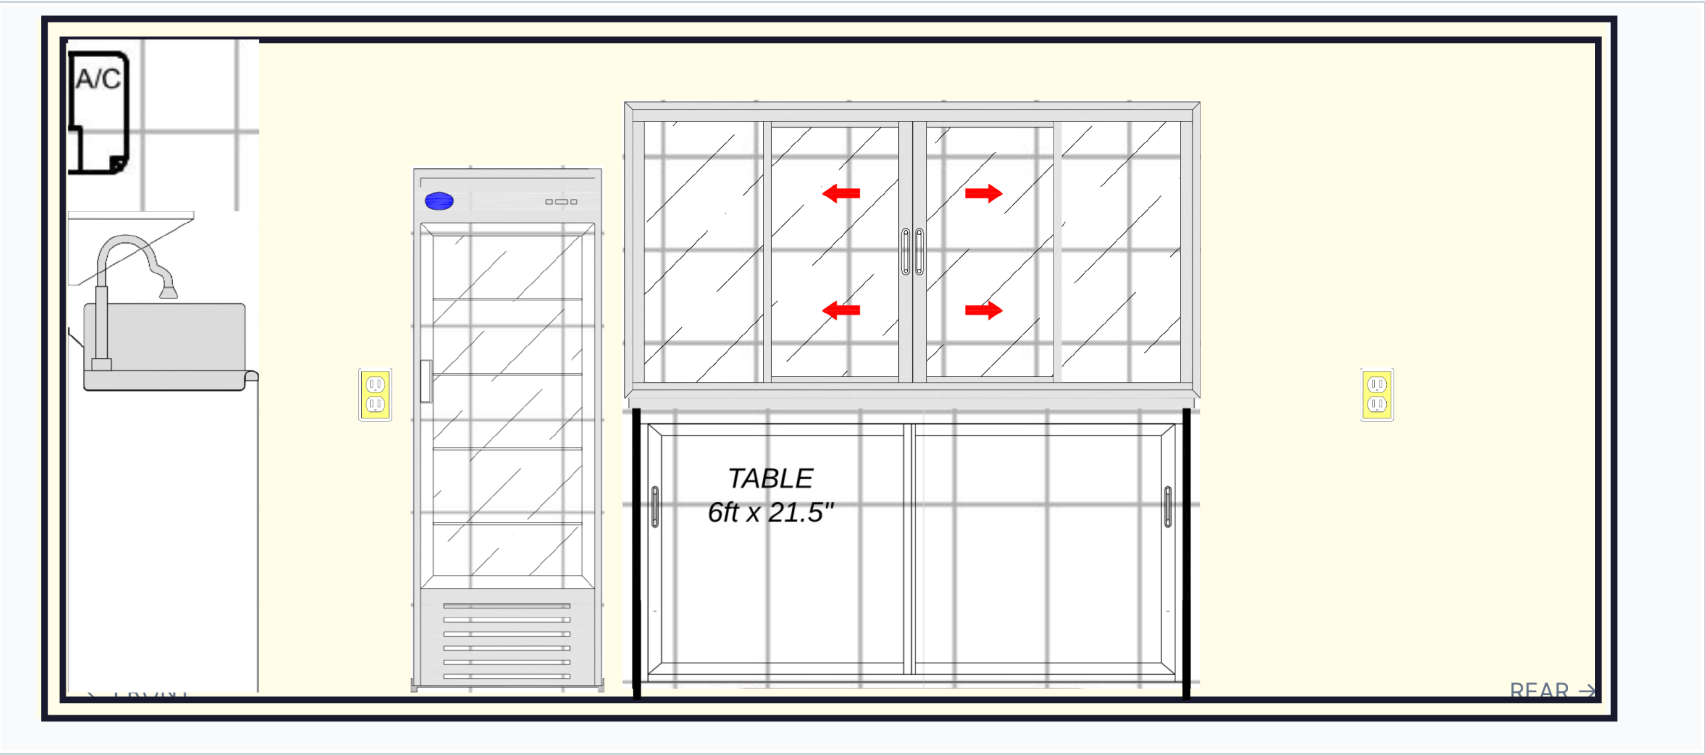

NSF COMMERCIAL HOOD

Type	Type I — grease rated
Length	8' 0" (2.44m)
Airflow	1,200 CFM
Material	430 Stainless Steel
Filters	SS baffle, removable
Suppression	Ansul R-102 system
Certification	NSF/ANSI 2 · UL 710

NSF SINKS

3-Comp. each	15"W × 15"D × 12"H
Material	18-ga 304 Stainless
Drainboards	Left & right, 18"
Hand sink	12×12" knee-valve
Certification	NSF/ANSI 2

INSULATED WALLS

Wall panels	Galvanized steel
Insulation	Polyurethane 2" (50mm)
R-Value	R-13 per inch
Interior	FRP food-grade
Floor	Diamond-plate alum.

VEHICLE / CHASSIS

Axle	Single, 3,500 lb
GVWR	7,000 lbs
Hitch	2-5/16" ball coupler
Brakes	Electric
Tires	ST225/75R15