



LEFT SIDE VIEW (LADO IZQUIERDO)

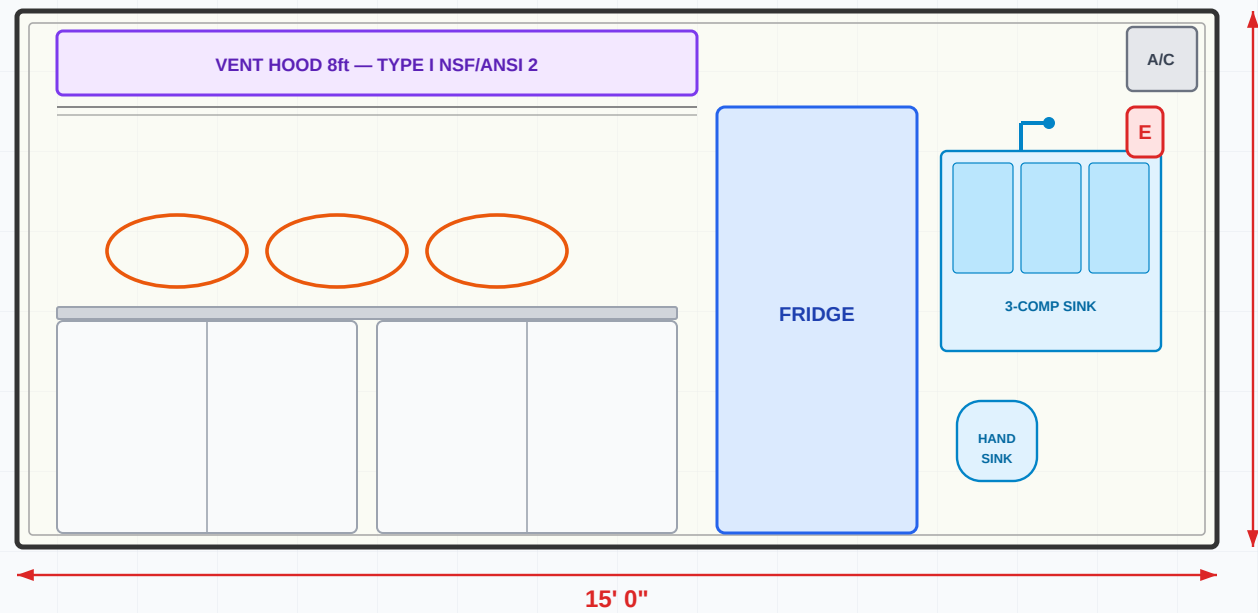

RIGHT SIDE VIEW (LADO DERECHO)

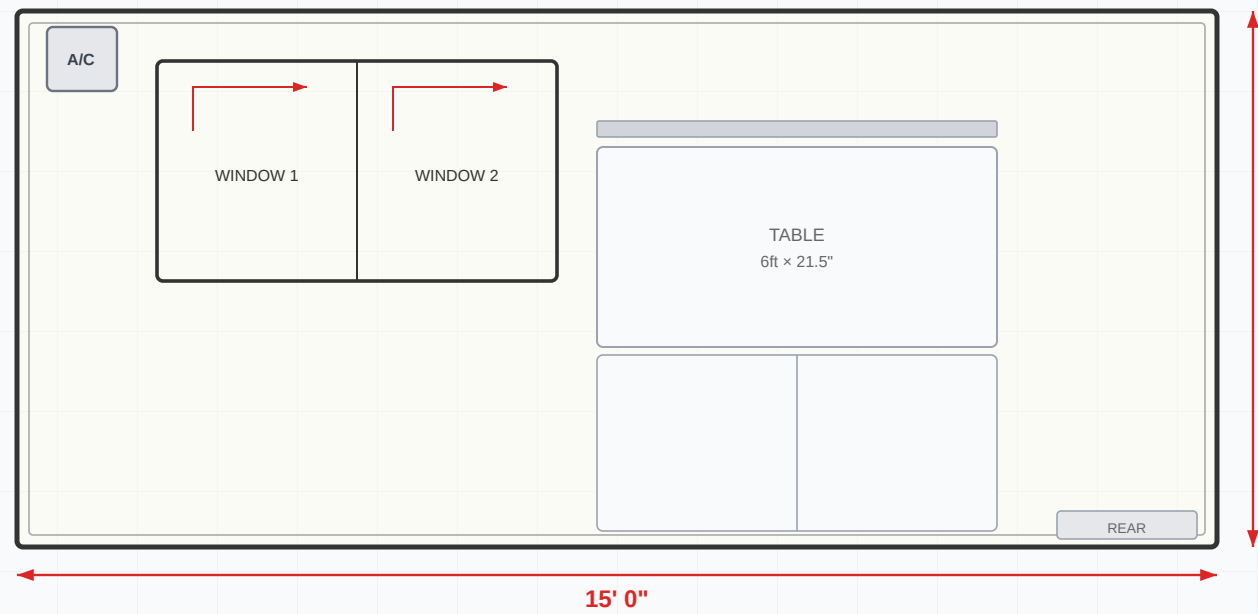

NSF COMMERCIAL HOOD

Type	Type I — Grease rated
Length	8' 0" (2.44m)
CFM Rating	1,200 CFM
Material	430 Stainless Steel — Baffle filters
Fire Suppression	Ansul R-102 system
Certification	NSF/ANSI 2 · UL 710

NSF SINKS

3-Compartment Sink	
Compartment Size	15"W × 15"D × 12"H each
Material	18-gauge 304 Stainless Steel
Drainboards	Left & right, 18" each
Hand Wash Sink	12"×12" · Knee-valve faucet


INSULATED WALLS

Wall Material	Galvanized steel panels
Insulation Core	Polyurethane foam — 2" (50mm)
R-Value	R-13 per inch
Interior Finish	FRP panels (food-grade)
Floor	Diamond-plate aluminum


VEHICLE / CHASSIS

Chassis Type	Single axle, 3,500 lb
GVWR	7,000 lbs
Hitch	2-5/16" ball coupler
Brakes	Electric brakes
Tires	ST225/75R15


TOP VIEW / PLANTA

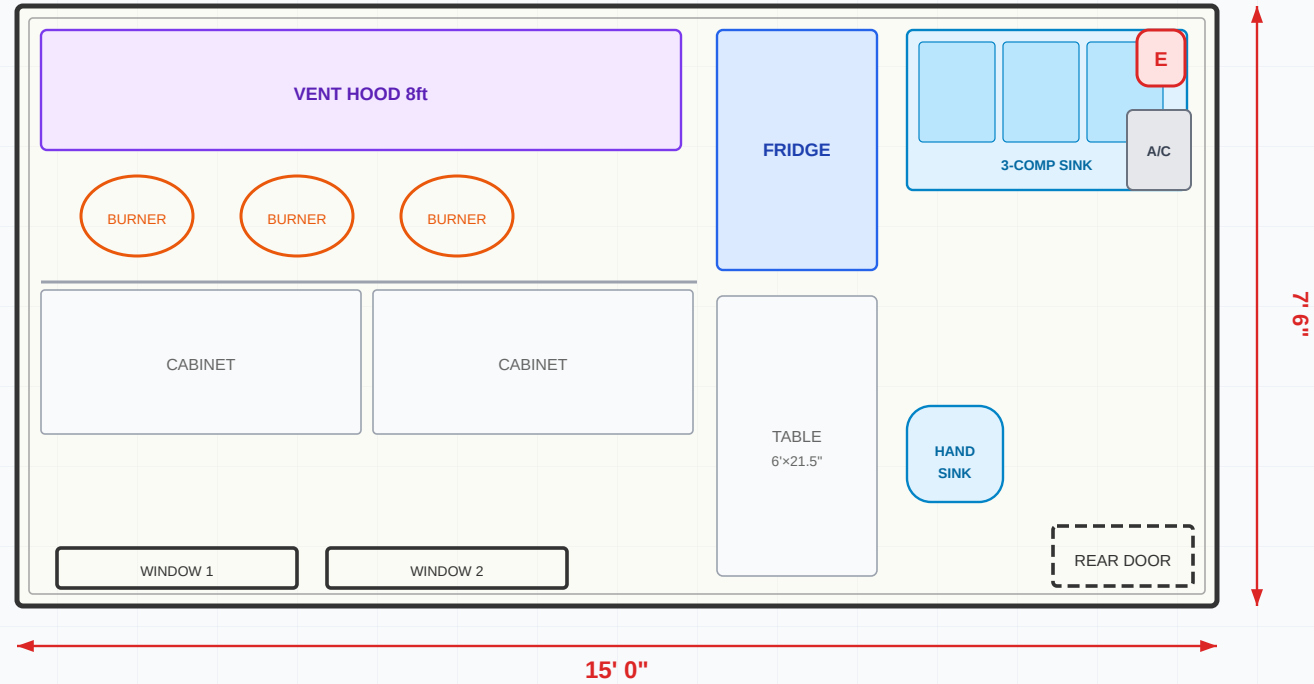

REAR VIEW

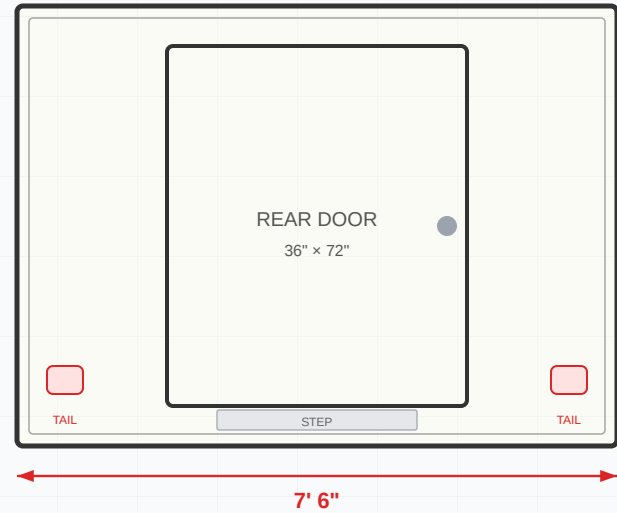

FRONT VIEW

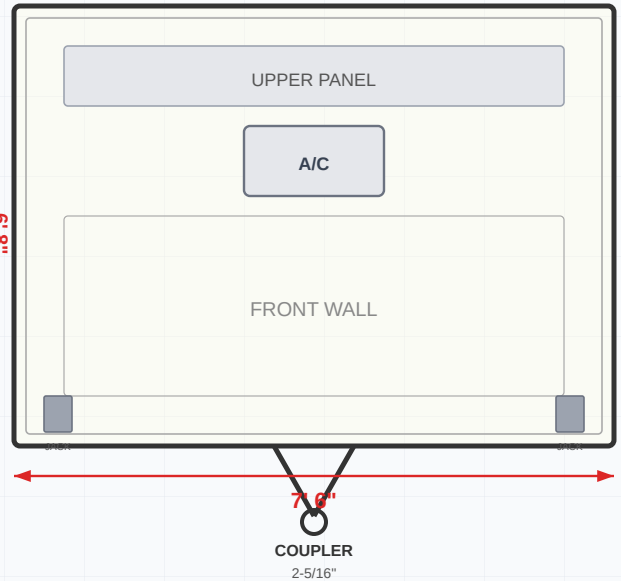

BOX SPECIFICATIONS

Exterior Length	15' 0" (4.57m)
Exterior Width	7' 6" (2.29m)
Interior Height	6' 8" (2.03m)
Frame	Steel tube frame — welded
Exterior Skin	Aluminum sheet — .040"
Rear Door	36" x 72" — Cam-lock
Service Windows	2 — Concession style, sliding glass

ELECTRICAL

Shore Power	50A / 120-240V — NEMA 14-50
Panel	100A main breaker, 12-space
Lighting	LED recessed — 6 fixtures
Exterior Lights	LED strip — under service window
Receptacles	4 x 120V duplex, 1 x 240V (A/C)
GFCI Protection	All receptacles GFCI — NEC compliant

PLUMBING

Fresh Water Tank	30 gal — FDA-approved poly
Waste Water Tank	50 gal — Mounted below floor
Water Pump	12V demand pump — 3.5 GPM
Water Heater	6 gal — LP gas, 120°F min
Grease Trap	Under 3-comp sink — removable

LEGEND

Vent Hood / Exhaust	Sink / Plumbing
Refrigeration	Fire Safety
Storage / Cabinets	HVAC / Mechanical
Cooking Equipment	Dimension Line

Scale: 40px = 1 ft | All dimensions nominal | NSF/ANSI certified equipment