




TOP VIEW (PLANTA)

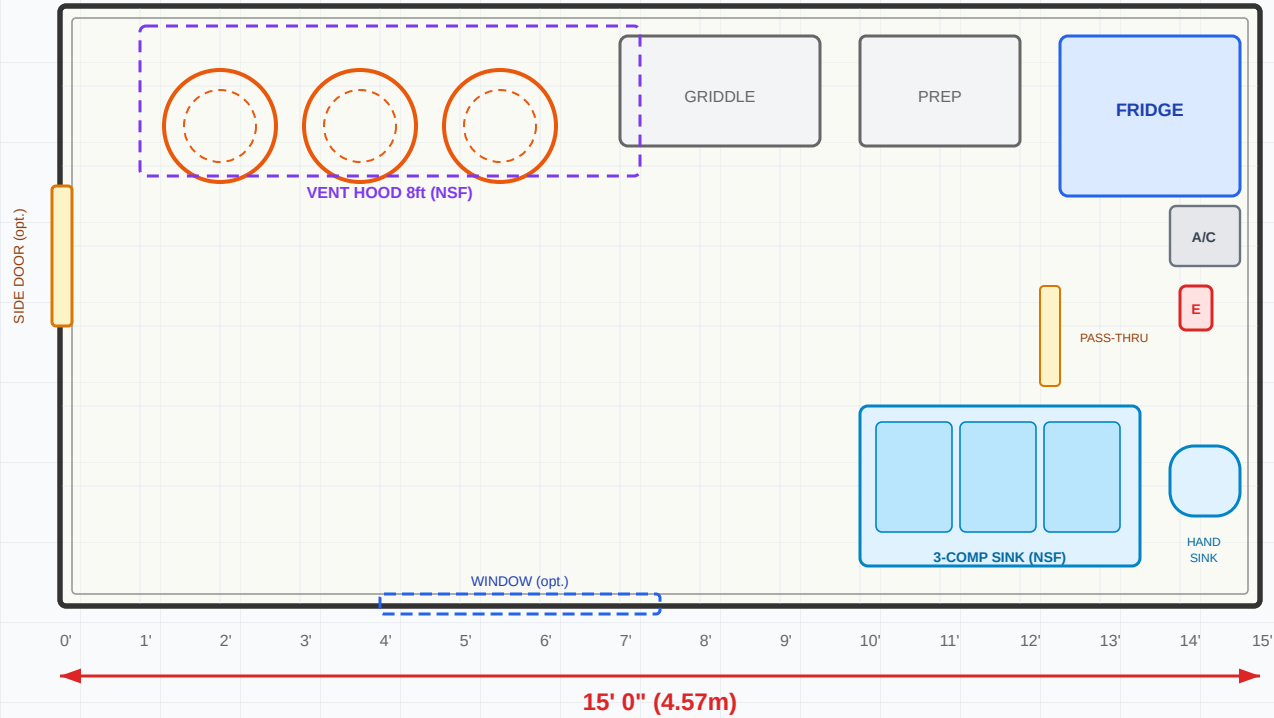


REAR VIEW (TRASERA)

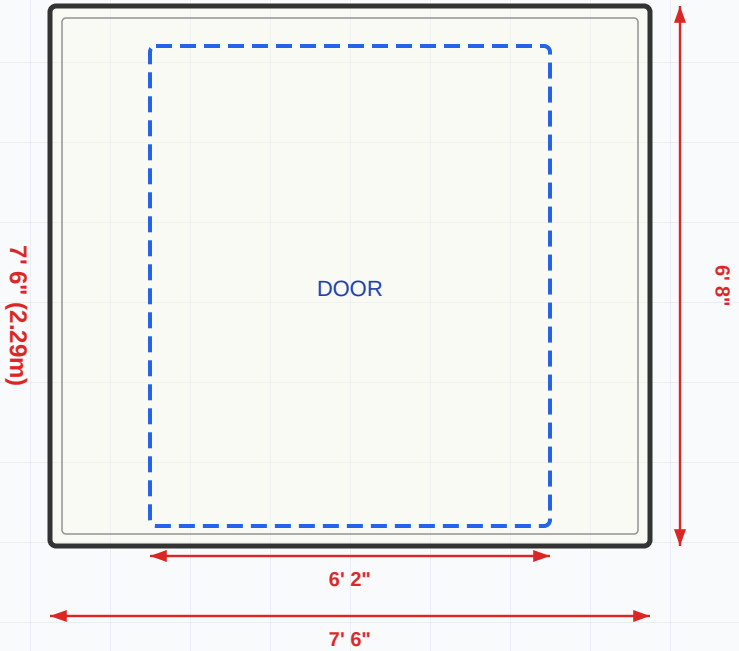

LEFT SIDE VIEW (LADO IZQUIERDO)

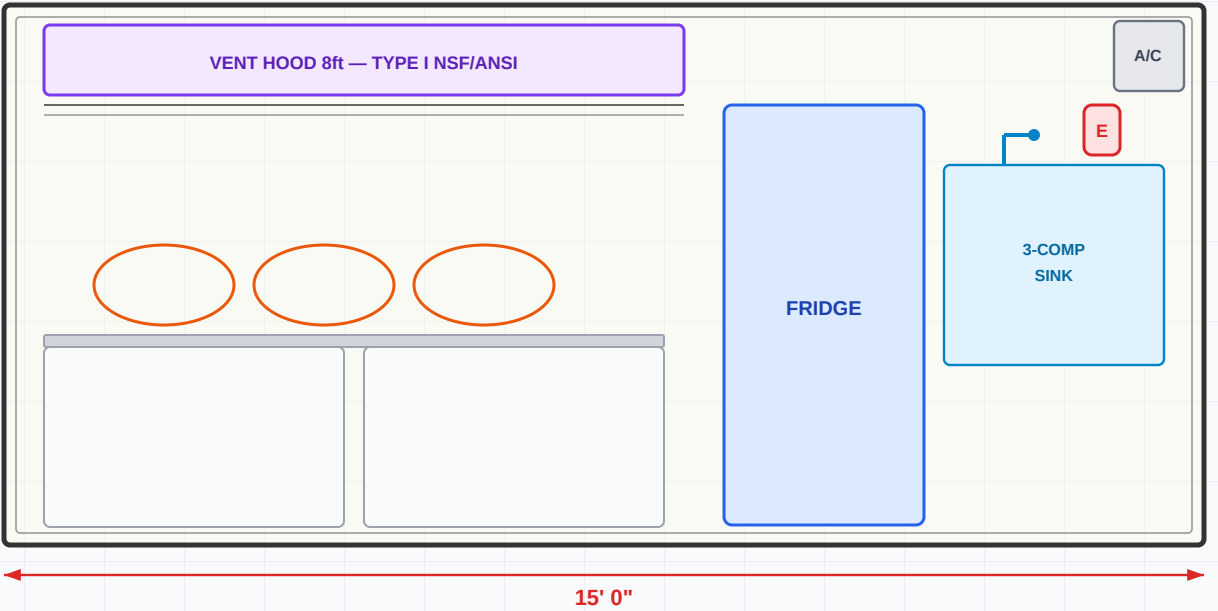

RIGHT SIDE VIEW (LADO DERECHO)

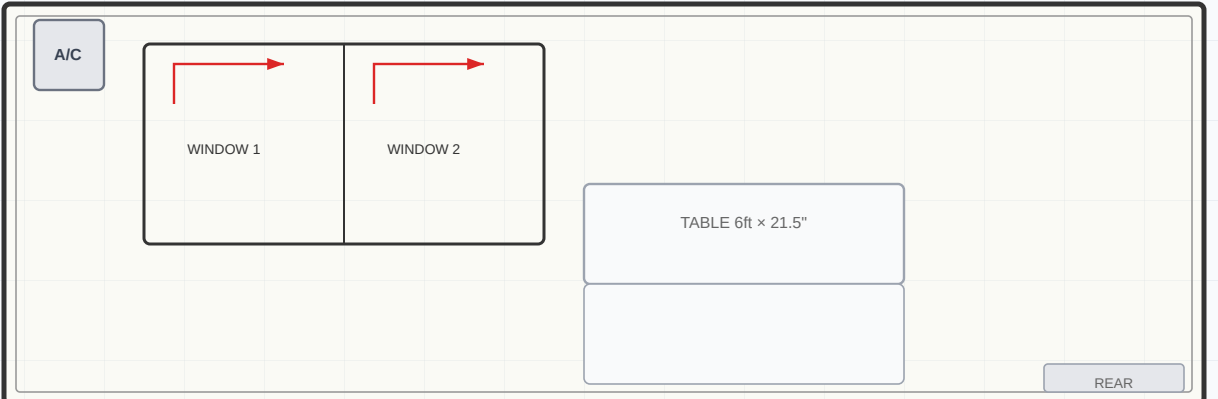

BOX SPECIFICATIONS

Interior Length	15' 0" (4.57m)
Interior Width	7' 6" (2.29m)
Interior Height	6' 8" (2.03m)
Floor Area	112.5 sq ft
Door Opening	6' 2"W × 6' 0"H
Frame	Steel tube 2"x3" welded
Scale	1 cuadro = 1 pie (40px)

INSULATED WALLS

Wall Material	Galvanized steel panels
Insulation Core	Polyurethane foam
Wall Thickness	2" (50mm)
R-Value	R-13 per inch
Interior Finish	FRP panels (food-grade)
Floor	Diamond-plate aluminum

VEHICLE / CHASSIS

Chassis Type	Single axle, 3,500 lb
GVWR	7,000 lbs
Hitch	2-5/16" ball coupler
Brakes / Tires	Electric brakes · ST225/75R15

NSF COMMERCIAL HOOD

Type	Type I — Grease rated
Length	8' 0" (2.44m)
CFM Rating	1,200 CFM
Material	430 Stainless Steel
Baffle Filters	SS removable, dishwasher safe
Fire Suppression	Ansul R-102 system
Certification	NSF/ANSI 2 · UL 710

NSF SINKS

3-Compartment Sink	
Compartment Size	15"W × 15"D × 12"H each
Material	18-gauge 304 Stainless Steel
Drainboards	Left & right, 18" each
Hand Wash Sink	
Size / Faucet	12"×12" · knee-valve faucet
NSF/ANSI 2 Certified	

LEGEND

Box structure	NSF Hood
Door / opening	NSF Sink
Optional element	Refrigeration
Dimension	1 cuadro = 1 pie