



LEFT SIDE VIEW (LADO IZQUIERDO)

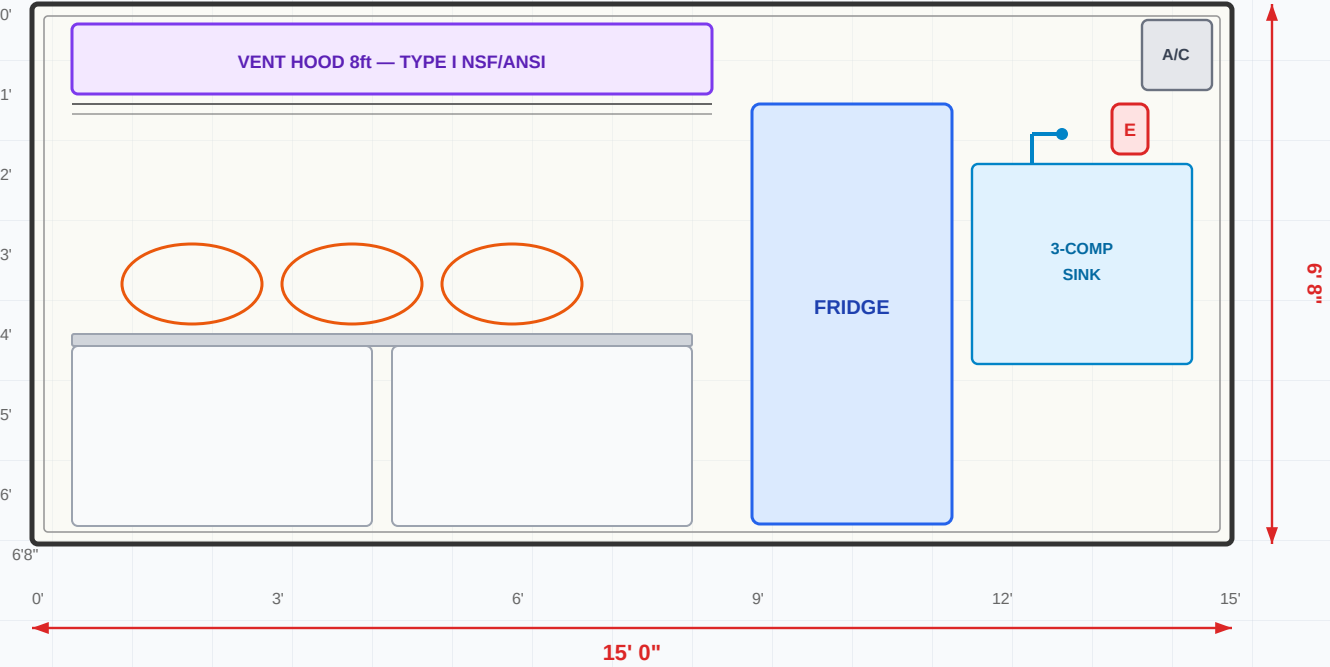

RIGHT SIDE VIEW (LADO DERECHO)

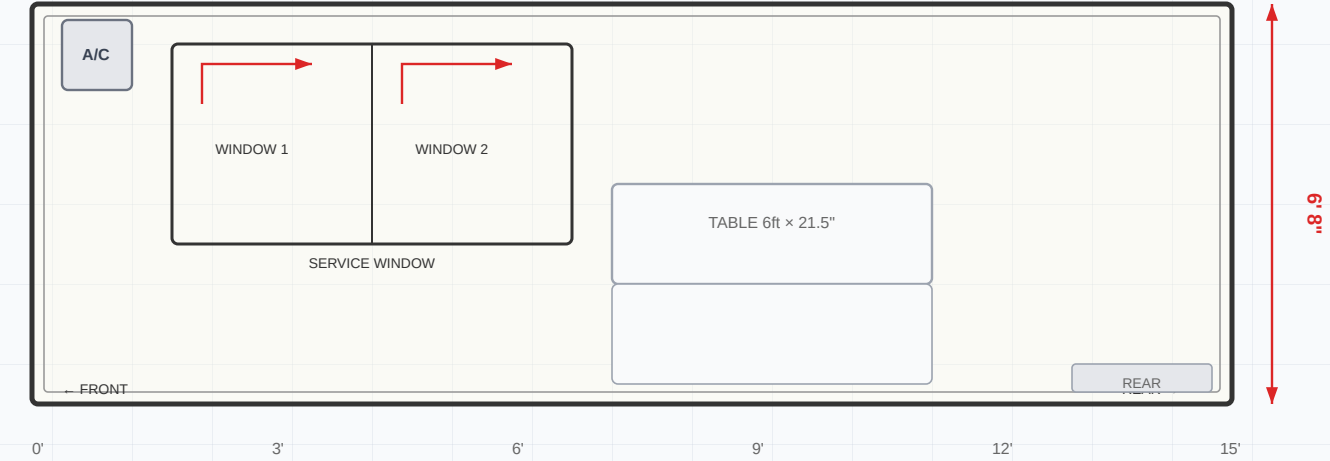

NSF COMMERCIAL HOOD

Type	Type I — Grease rated
Length	8' 0" (2.44m)
CFM Rating	1,200 CFM
Material	430 Stainless Steel
Baffle Filters	SS removable, dishwasher safe
Fire Suppression	Ansul R-102 system
Certification	NSF/ANSI 2 · UL 710

INSULATED WALLS

Wall Material	Galvanized steel panels
Insulation Core	Polyurethane foam
Wall Thickness	2" (50mm)
R-Value	R-13 per inch
Interior Finish	FRP panels (food-grade)
Floor	Diamond-plate aluminum

ELECTRICAL




Shore Power	50A / 120-240V — NEMA 14-50
Panel	100A main breaker, 12-space
Receptacles	4 × 120V duplex, 1 × 240V (A/C)
Water Heater	6 gal — LP gas, 120°F min
Fresh Water	30 gal — FDA-approved poly
Water Pump	12V demand pump — 3.5 GPM

NSF SINKS

3-Compartment Sink	
Compartment Size	15"W × 15"D × 12"H each
Material	18-gauge 304 Stainless Steel
Drainboards	Left & right, 18" each
Hand Wash Sink	
Size / Faucet	12"×12" · knee-valve faucet
NSF/ANSI 2 Certified	

VEHICLE / CHASSIS

Chassis Type	Single axle, 3,500 lb
GVWR	7,000 lbs
Hitch	2-5/16" ball coupler
Brakes	Electric brakes
Tires	ST225/75R15
Tongue	A-frame, heavy duty

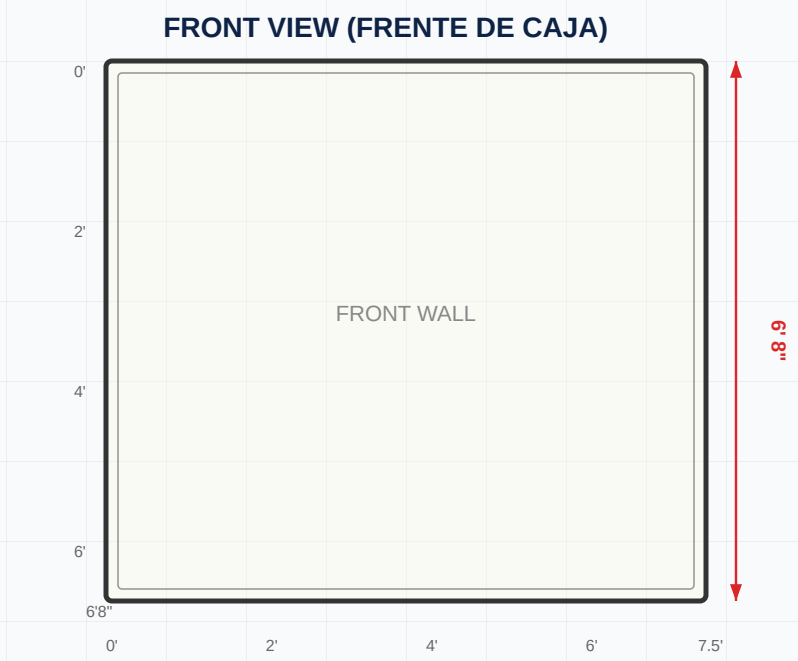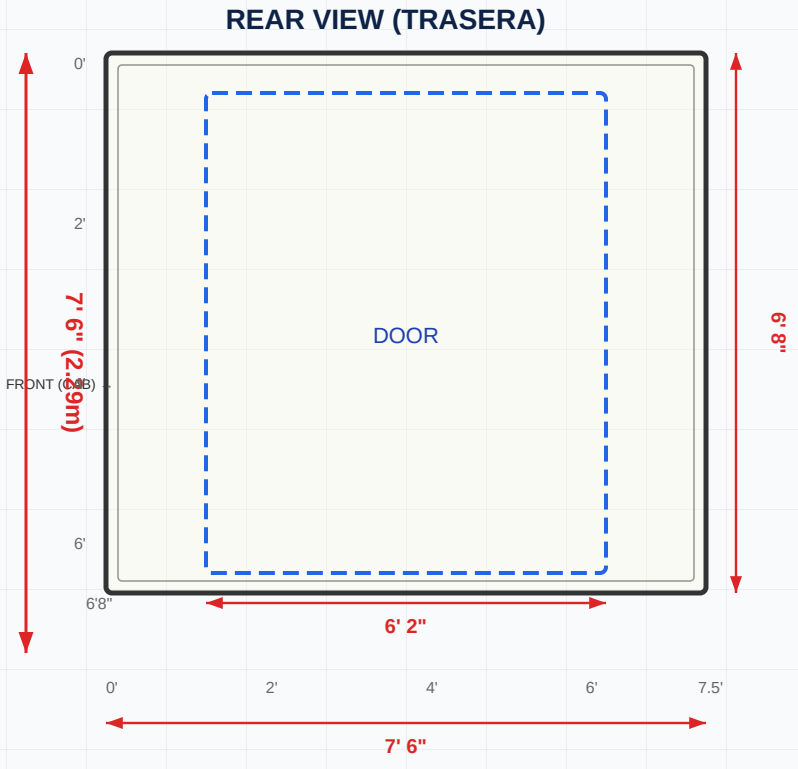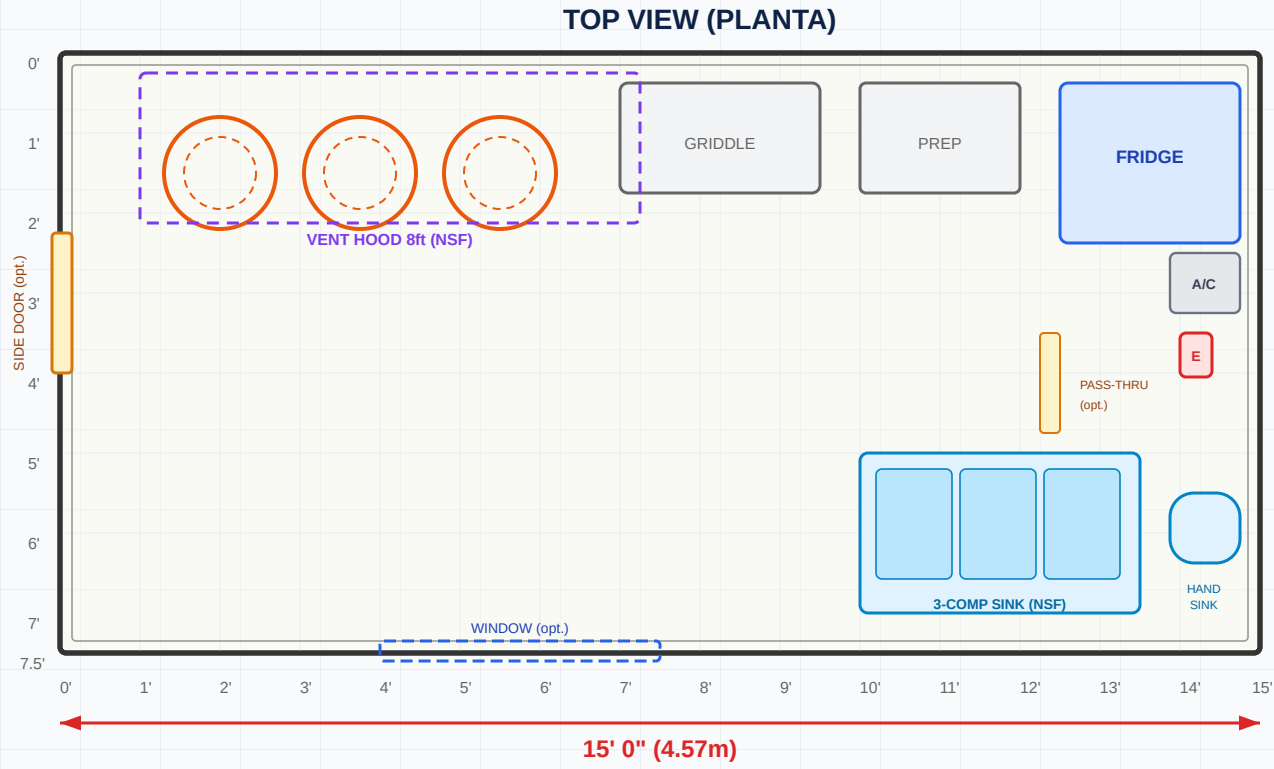

BOX SPECIFICATIONS	
Interior Length	15' 0" (4.57m)
Interior Width	7' 6" (2.29m)
Interior Height	6' 8" (2.03m)
Floor Area	112.5 sq ft
Door Opening	6' 2"W × 6' 0"H
Frame	Steel tube 2"x3" welded
Scale	1 cuadro = 1 pie (40px)

PLUMBING	
Fresh Water Tank	30 gal — FDA-approved poly
Waste Water Tank	50 gal — Mounted below floor
Water Pump	12V demand pump — 3.5 GPM
Water Heater	6 gal — LP gas, 120°F min
Grease Trap	Under 3-comp sink — removable
Drain	Floor drain — center of box

LEGEND	
Box structure	NSF Hood
Door / opening	NSF Sink
Optional element	Refrigeration
Dimension	1 cuadro = 1 pie
Wheel well	Fire safety