



AUTONOMO



**Solar powered
program for interior
and exterior
sun protection**

Mastering the technology

Solar energy technology keeps on evolving and Gaposa is at the forefront of the latest development to offer the best solution. With a unique algorithm developed after years of research as its foundation, **Gaposa is now completing its solar powered program.**

Capturing solar power and storing the energy for years of use results in the precise combination between the battery capacity and the solar panel peak production.

The **AUTONOMO** range, is a completely autonomous program for interior blinds and exterior sun protection with **12 different motor solutions from 1 to 50 Nm.**

BENEFITS



wireless control



no wiring



*ROLLAPP
home automation*



*no painter
no electrician*



quick installation



quiet solutions



1 solar panel only



Energy savings



*soft start
soft stop*

QUALITY



*high quality
photovoltaic cells*



*days battery
autonomy*



years warranty

APPLICATIONS



zip screens



interior blinds



awnings



roller shutters



AUTONOMO

*Designed to provide an unparalleled level of convenience, efficiency, and eco-friendliness, the **AUTONOMO** Solar Motor is set to transform the way we interact with Zip screens, Rolling shutters and interior blinds.*

*With a number of solar panel options, torques (1 to 50Nm) and battery solutions, the **AUTONOMO** line from Gaposa will answer any needs.*

Torque Sensing Function. The *Autonomo Solar Motor* is equipped with a state-of-the-art torque sensing function. This intelligent feature allows the motor to accurately detect resistance levels during operation, ensuring precise and reliable movement.





Solar Station.

Developed to fit all installation, the SPB18 solar station will be perfect for Zip screens where space inside the head box is an issue or when we need to retrofit an old manual roller shutter to solar technology.

Double-Try Obstacle Detection.

Safety is of paramount importance, and with its double-try obstacle detection mechanism, the motor instantly detects any obstructions in the path of your Zip or shutter.



Based on same principle as the **exterior solar motor program** but with a solar panel especially designed to be **installed inside**, the **Autonomo** for interior blinds is perfect when there is no power outlet. Gaposa's complete line of quiet DC motors for interior applications are compatible with SPM10 solar panel.

COMPONENTS AND TECHNICAL DETAILS

KIT **XQBPX616** (6 Nm)

Motors	Series	Torque	Speed	Solar Panel	Battery	Connectors	Limits	Power	Amps
XQDC4SX616	XQ40	6 Nm	16 rpm	SPM18	BNH22	Standard (cable 25 cm)	160	36 W	3.0 A

KIT **XQBPX1012** (10 Nm)

Motors	Series	Torque	Speed	Solar Panel	Battery	Connectors	Limits	Power	Amps
XQDC4SX1012	XQ40	10 Nm	12 rpm	SPM18	BNH23	Standard (cable 25 cm)	160	36 W	3.0 A

KIT **XSBPX2012 – XQBPX2016** (20 Nm)


Motors	Series	Torque	Speed	Solar Panel	Battery	Connectors	Limits	Power	Amps
XSDC5SX2012 <i>Sileo</i>	XS50	20 Nm	12 rpm	SPM30	BNH24	Standard (cable 25 cm)	80	72 W	6.0 A
XQDC5SX2016	XQ50	20 Nm	16 rpm	SPM30	BNH24	Standard (cable 25 cm)	80	72 W	6.0 A

KIT **XQBPX309** (30 Nm)

Motors	Series	Torque	Speed	Solar Panel	Battery	Connectors	Limits	Power	Amps
XQDC5SX309	XQ50	30 Nm	9 rpm	SPM30	BNH24	Standard (cable 25 cm)	80	72 W	6.0 A

Solar panels	SPM18	SPM30
Max power current	200 mA	360 mA
Max power Voltage	18 V	18 V
Maximum power	3.6 W	6.4 W
Protection	IP X4	IP X4

Batteries	BNH22	BNH23	BNH24
Voltage	12V / Ni-MH	12V / Ni-MH	12V / Ni-MH
Capacity	2200 mAh	2500 mAh	4000 mAh
Working temperature	-20°C/+70°C	-20°C/+70°C	-20°C/+70°C

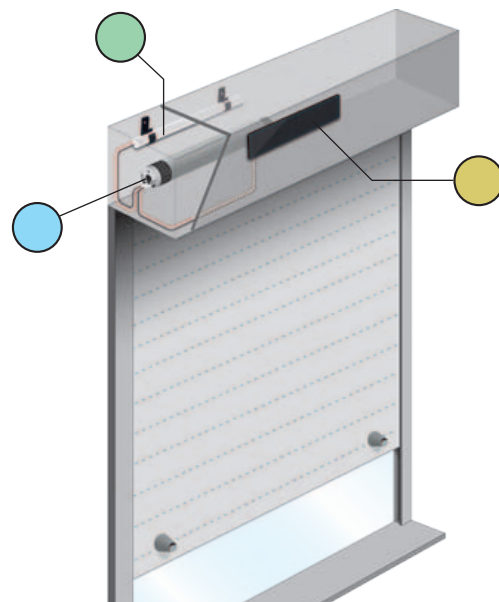


XQ40
TYPE OF
HEADS AVAILABLE

XQDC4SX616 (Kit XQBPX616)
XQDC4SX1012 (Kit XQBPX1012)



• Motor with starred head, integrated antenna and oversized crown

XQDC4SVX616 (Kit XQBPVX616)
XQDC4SVX1012 (Kit XQBPVX1012)



• Compact round head motor

BPX
ACCESSORIES



BB22
Battery brackets

KIT **XQBPLX1012** SOLAR STATION (10 Nm)

Motors	Series	Torque	Speed	Solar Panel + Battery	Connectors	Limits	Power	Amps
XQDC4LX1012	XQ40	10 Nm	12 rpm	SPB18	waterproof (cable 50 cm)	160	36 W	3.0 A

KIT **XSBPLX2012 – XQBPLX2016** SOLAR STATION (20 Nm)

Motors	Series	Torque	Speed	Solar Panel + Battery	Connectors	Limits	Power	Amps
XSDC5LX2012 <i>Sileo</i>	XS50	20 Nm	12 rpm	SPB18	waterproof (cable 50 cm)	80	72 W	6.0 A
XQDC5LX2016	XQ50	20 Nm	16 rpm	SPB18	waterproof (cable 50 cm)	80	72 W	6.0 A


KIT **XQBPLX309** SOLAR STATION (30 Nm)

Motors	Series	Torque	Speed	Solar Panel + Battery	Connectors	Limits	Power	Amps
XQDC5LX309	XQ50	30 Nm	9 rpm	SPB18	waterproof (cable 50 cm)	80	72 W	6.0 A

KIT **XQBPLX403** SOLAR STATION (40 Nm)

Motors	Series	Torque	Speed	Solar Panel + Battery	Connectors	Limits	Power	Amps
XQDC5LX403	XQ50	40 Nm	3 rpm	SPB18	waterproof (cable 50 cm)	80	36 W	3.0 A

Solar Station	SPB18
Solar panels	
Max power current	305 mA
Max power Voltage	18 V
Maximum power	5.5 W
Protection	IP 55
Battery in alu profile	
Voltage	12V / Ni-MH
Capacity	5000 mAh
Working temperature	-20°C/+70°C

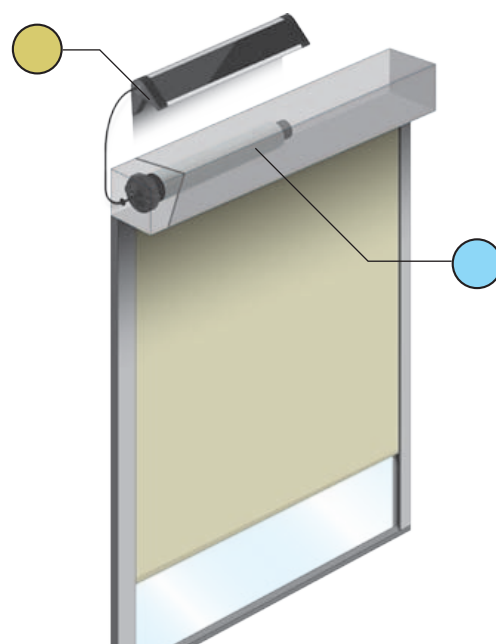


XQ40 TYPE OF HEADS AVAILABLE

XQDC4LX1012 (Kit XQBPLX1012)



- Motor with starred head, integrated antenna and oversized crown

XQDC4LVX1012 (Kit XQBPLVX1012)



- Compact round head motor

MOTORS COMMON TECHNICAL DETAILS

Power Supply	12 V
Working temp.	-10° C / +40° C
Duty rating	6 min
Radio frequency	868.30 MHz
Protection	IP44

OPTIONALS



FLAXTWCC

Twin-connection Y cable to upgrade a solar assembly with an additional solar panel



FLAX13W098

2 m cable for connecting the **AUTONOMO** LX motors to the 12V power supply network via transformer (not included)




FLAX31W021

Extension cord with waterproof connectors (3 m)



FLAXTWP1


Extension cable for connecting solar panels SPM18/30 (1 m)




FLAXTWP5

Extension cable for connecting solar panels SPM18/30 (5 m)

Accessory kit for compact **XQ40** head motors




AXRRF4
Limits crown adapter



AXT45
Round to star head adapter

FLAXMC-NI

Charging kit with magnetic connectors in combination with BC15NH/BC16NH battery charger (not included)

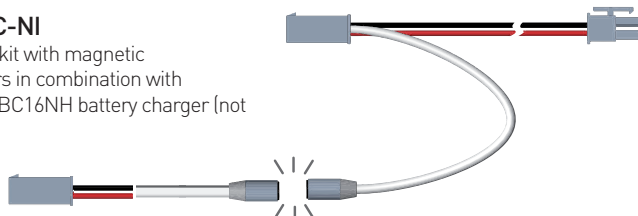

The charger is connected by bringing the two magnetic terminals closer together. Once the charge is complete, simply pull lightly to disconnect them.



BATTERY CHARGER

BC16NHX2

"Dual Charger" battery charger. It allows you to charge two different battery packs at the same time thanks to the two independent circuits it is equipped with. It has an intuitive programmable interface and a cooling fan for intensive use.

Input: 100-240 VAC / 11-18VDC

Charging Power:

AC: CH1 CH2 = 150W

DC: 120W x 2

Charging Current: 0.1-10A x 2

Dimensions: 145 x 100 x 65 mm

Cable length: 110 - 20 cm



BC18NHD.EU

Battery charger for NI-MH batteries up to 5000mA

Input: 100-240 VAC - 50/60 Hz - 0.6 A Max

Output: 12/18VDC - 1.0 A

Dimensions: 45 x 84 x 30 mm

Cable length: 130 cm



BC18NHD.EU

Type C electrical socket



BC18NHD.US

Type A electrical socket



BC18NHD.UK

Type G electrical socket



BC15NH

Battery charger for NI-MH batteries up to 2500mA

Input: 100-240 VAC - 50/60 Hz - 0.5 A Max

Output: 12.6 VDC - 1000 mA

Dimensions: 40 x 58 x 32 mm

Cable length: 180 cm



FLAX31W020


Interface for connecting the charger to the Solar station SPB18 (NI-MH battery solar panel on watertight aluminum profile)



DIMENSIONS (in mm)

Motors


XQDC4SZ616
XQDC4SZ1012
XQDC4LZ1012

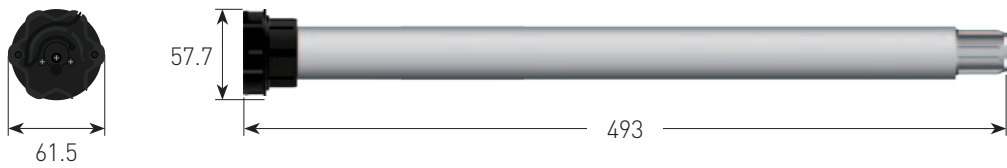

XQDC4SVZ616
XQDC4SVZ1012
XQDC4LVZ1012



XQDC5SZ2016
XQDC5LZ2016
XSDC5SX2012 *Sileo*
XSDC5LX2012 *Sileo*
XQDC5SZ309
XQDC5LZ309
XQDC5LZ403

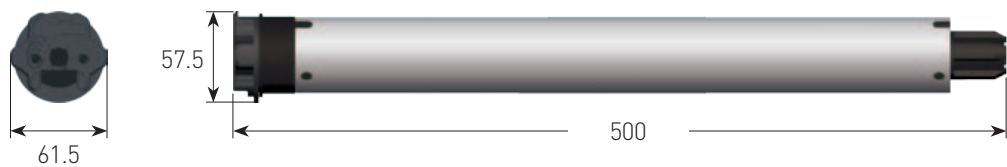

Batteries

BNH22
BNH23




BNH24




Solar panels


SPM18

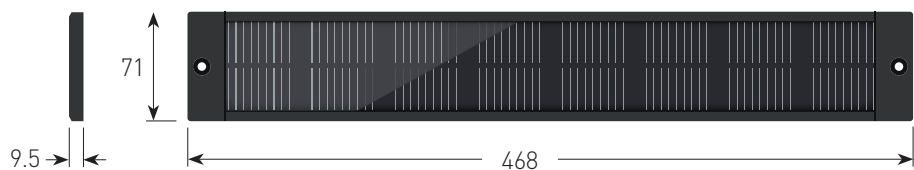

SPM30

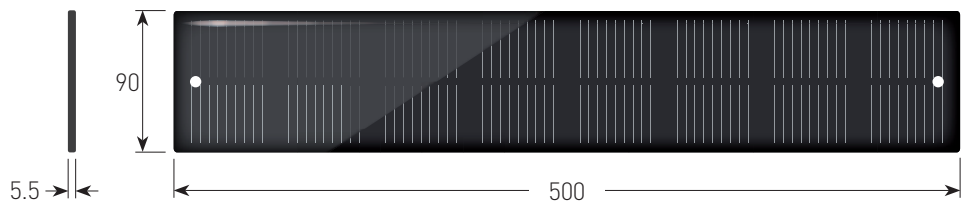

SPB18

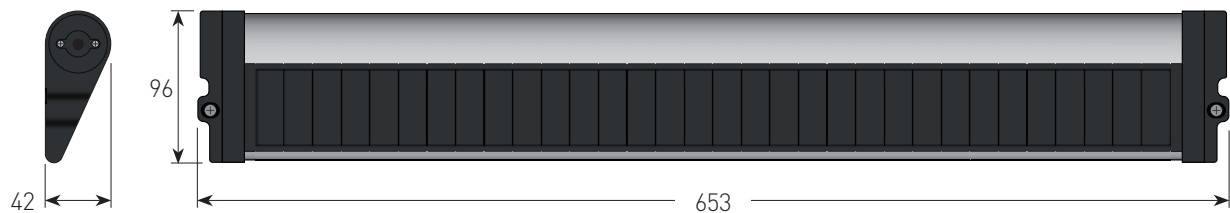

COMPONENTS AND TECHNICAL DETAILS


KIT **XQBPLX5012 / XQBPLX5012S*** SOLAR STATION (50 Nm)

 Motors	Series	Torque	Speed	Solar Panel + Battery	Connectors	Limits	Power	Amps
XQDC5LX5012/S*	XQ50	50 Nm	12 rpm	SPB22	waterproof (cable 50 cm)	80	150 W	9.0 A

 Solar Station	SPB22
Solar panels	
Max power current	305 mA
Max power Voltage	22 V
Maximum power	6.5 W
Protection	IP 55
Battery in alu profile	
Voltage	16.8V / Ni-MH
Capacity	4200 mAh
Working temperature	-20°C/+70°C


MOTOR TECHNICAL
DETAILS

Power Supply	16.8 V
Working temp.	-10° C / +40° C
Duty rating	6 min
Radio frequency	868.30 MHz
Protection	IP44

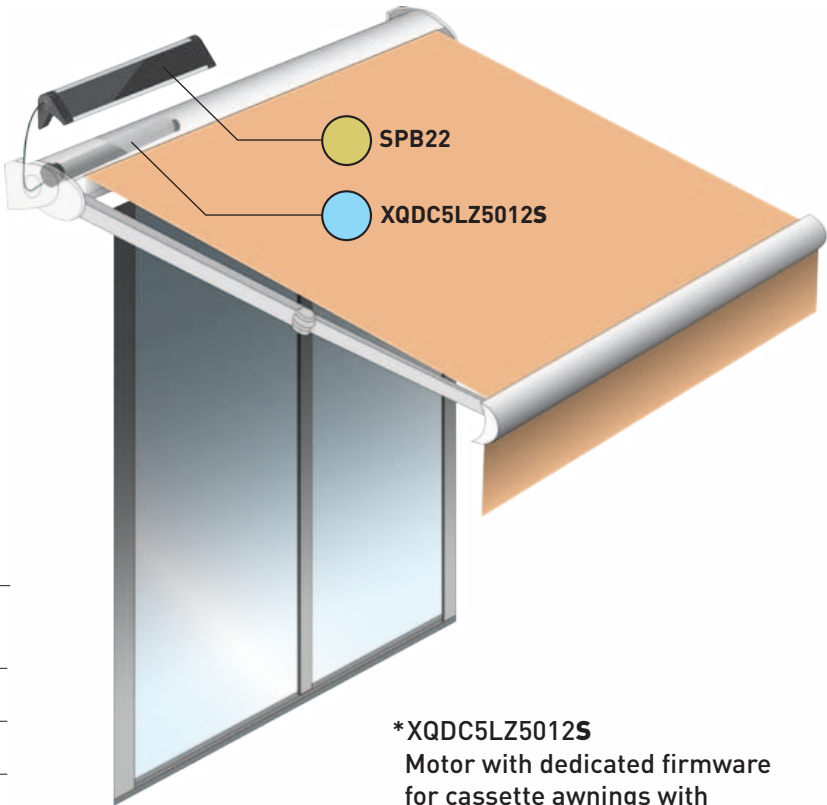

***XQDC5LZ5012S**
Motor with dedicated firmware
for cassette awnings with
reduced back-release

DIMENSIONS
mm

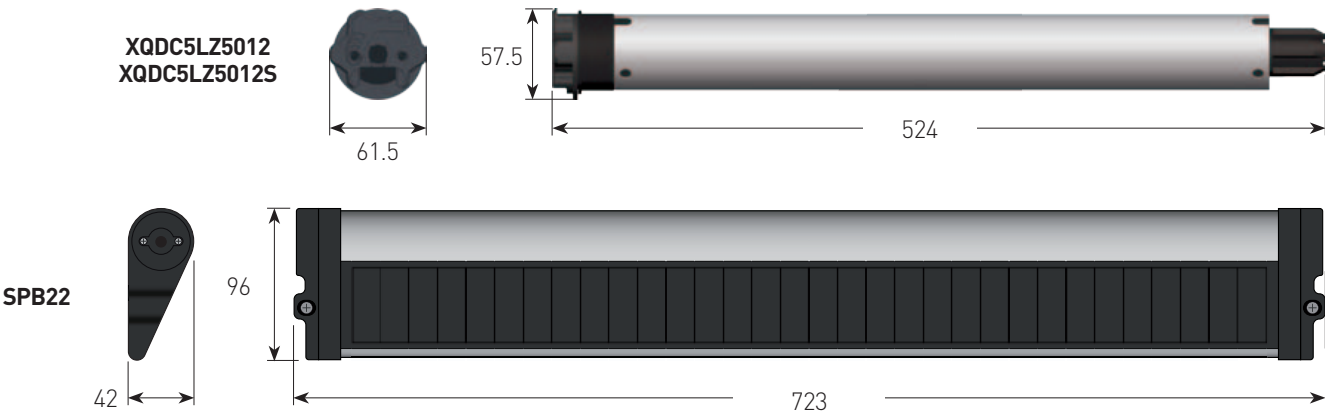





GAPOSA srl

via Ete, 90 - 63900 Fermo - Italy

Tel. +39.0734.220701

info@gaposa.com

www.gaposa.com

