





Automatically detects the door status,
automatic processing to open close the door

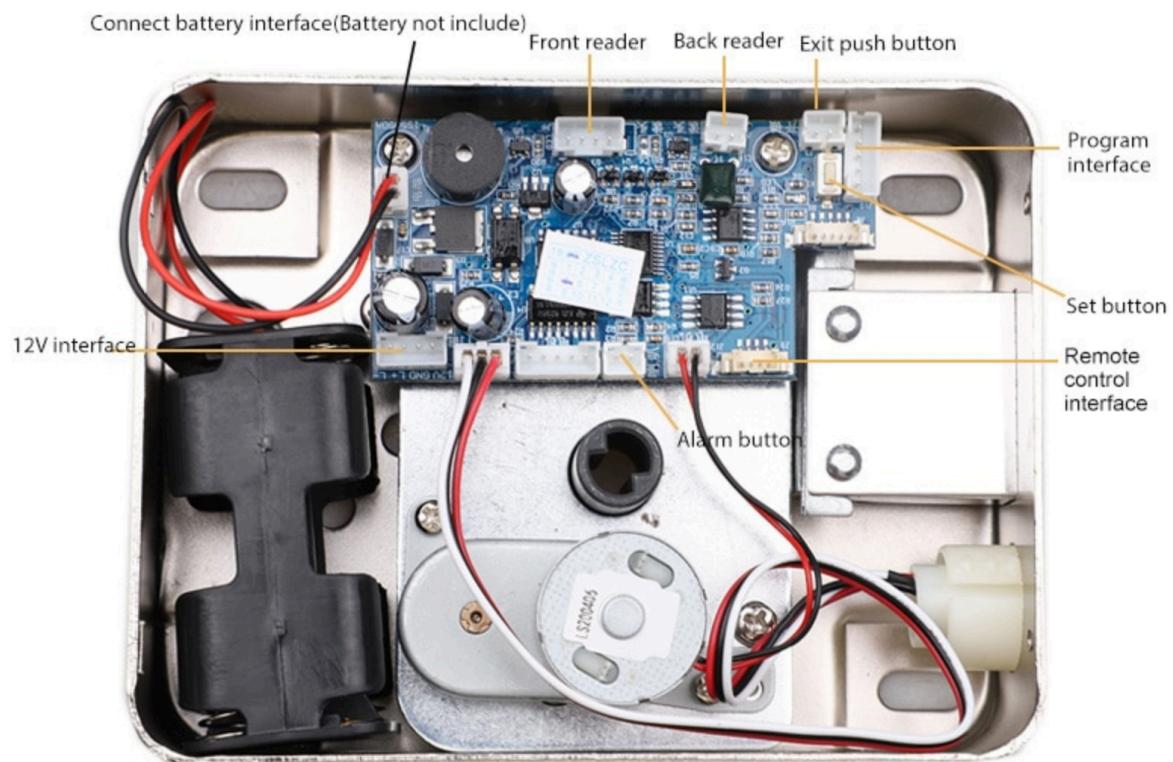

12V Connect diagram

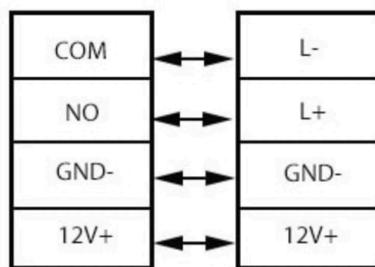

I.Advantage

- The length of the lock tongue>20mm, meet GA/T73-94 5.1.6B standard
- Can be compatible with building system of entrance guard system, etc
- **Automatically detects the door status, automatic processing to open close the door**
- Can be installed on the **left door, right door, interior door, outside the door and other doors**
- Mistakenly lock or unlock after no entry, the door automatically locked in around 8 seconds
- **2Ways Power supply: 4 x AA Battery (No wiring) and DC12V , current <350mA, unlock time 1S**
- Working temperature range -40°C~60°C
- Long life (more than 500,000), on / off, high sensitivity about ON/OFF, low power consumption

II.Single end and double end for your choose

- Single end:Exit the door by knob/Card,Enter the door by key/Card make you fell convenient
- Double end: Exit/enter the door all by key/Card make you feel safety



Operate instruction

1. Restore factory: Press set button, red light flash 8 times, all data will be deleted
2. Add Master: Press Set button, Red light flash 3 times then swipe master card
3. Aging test : Press set button,Red light flash 16 times

I. Method of Master Card application(To add User)

- 1.Read master card,The red light ON
- 2.Reader User card or Remote control
- 3.Read Master card Again

II. Method of Master Card application(To DELETE User)

- 1.Read master card ,The red light ON
- 2.Reader User card
- 3.Read Master card Again



Product user manual

Preface


Thank you very much for choosing our products. Please read the contents listed in this manual carefully before making them available.

1. This lock is powered by four No. 5 alkaline batteries. Do not install batteries that do not conform to specifications or are of inferior quality.
2. Before installation, please install batteries to test whether the function is normal. If there are any problems, please contact the dealer or the distributor in time. Manufacturer contact.
3. It is forbidden to install by welding. The welding process will lead to the rapid increase of temperature and damage of the product. And welding will produce strong arc radiation, which will easily lead to damage or increase the power consumption of the product.
4. If mounted on iron or stainless steel doors, drilling holes should be marked on the doors first. Re-drilling. You must not fix the lock on the door and drill holes into the position, which will leave slight debris. In the lock, these iron chips will be adsorbed on the magnets under the circuit board, resulting in circuit board damage!
5. When installing the outer lock core, please open a lock core hole not less than 30MM in diameter on the door and polish the edge. Avoid sharp edges of openings, resulting in broken skin or broken connection lines of external card brushers.
6. This manual is suitable for multiple models of the same series.
7. Due to the instability of the real environment, the actual value of some data may be stored with the data provided in this manual. In case of any doubt or controversy about deviation, the final explanation of our company shall prevail.

Product characteristics

1. Power supply mode: 4 batteries No. 5 or 12V
2. Battery life: more than 1 year or more than 30,000 unlocks
3. Telecontrol capacity: 30 users
4. Card capacity: 970 users
5. Automatic lock unlocking by mistake: support, 10 seconds delay
6. Closing Induction Anti-jamming: Support, Delay 0.5 seconds

Installation wiring diagram

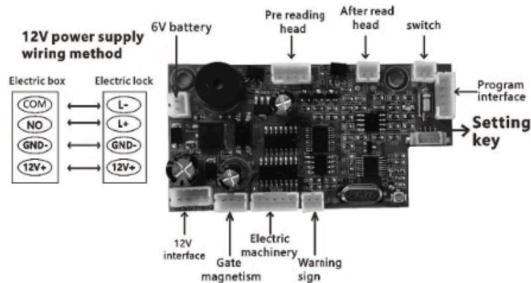

Operation instructions

1. Restore the factory: Press the settings button to delete all data eight times.
2. Added Management Card: Press Settings Key, Red Flash 3 times to Brush Management Card3. Aging test: 16 times of red light flashing by setting key

Management card description

1. When the management card 'beeps' is switched on once, the red light is always on, which can increase the number of user cards or the number of user cards. Remote control.
2. The red light is always on when the management card 'beeps' is switched on once. It can be deleted when it is in use. User card or remote control.

Strengthened Remote Controller (Option)

A	Unlock	B	Unlock
C	Unlock	D	Unlock

A+B	Deploy troops for defence
C+D	Withdrawal



2203 Battery
Lock Single Head



2203 Battery
Lock Double Head

Note: This lock is not a fire-fighting lock. It is forbidden to install it in fire escape. Students, otherwise the consequences are at their own risk!