Morban's thesis

Marco Orban

text

1 Literature Review

2 Literature Review

2.1 Research Purpose

This is something her

2.2 Additive manufacturing

2.3 Topology Optimization

Topology optimization is an optimization technique that seeks to find the optimal shape within a volume that satisfies certain governing equations, while at the same time satisfying specific constraints. This technique is usually utilized for the design of structures with no preconceived shape. When topology optimization is used for the purpose of designing structures, the optimal shape resulting from the analysis can be interpreted as a material distribution within the specified volume, which is called the design domain. A classical application of topology optimization is the binary compliance problem, in which regions of solid and void materials are distributed in order to minimize the work done by external forces (this is called compliance), also subject to a volume constraint.

$$Thisisanequation \alpha = 3 + m$$

In the above formulation, the design domain

This binary compliance problem suffers from a serious drawback; the problem is ill-posed and the solution will converge to a material distribution in the shape of a checkerboard pattern, with infinitesimal holes. To alleviate this, several restrictions must be made and the equations used to generate the structure must be modified.

Talk here about density-based approach and SIMP

Talk here about the filters, density filters and Helmholtz filters

Techniques such as perimeter control methods [] density gradient control and mesh-independent density filters could be used to solve the problem of a chattering design [reference goes here, fitler in topology optimization. A filtering approach implements an algorithm that itereates over all the points in the design domain, and uses weighted values of its surroindings to determine the final density value of the point in question, effectively computing the weighted average of a point and its surroindings.

Talk here about hyperbolic tangent and what it does to the fitler

Here, the full equation of topology optimization using all of the above should be shown.

2.4 Parametric Sweep

Hello this is a subsection

3 Methodology

4 Introduction

To analyze the performance of different support structures created using topology optimization, a comparison study was made in which parts created by additive manufacturing were paired with different support structures. This study assumed that different structures will conduct heat energy differently, and thus some topologies might be more effective in removing heat faster from each material layer as it is being processed. This increased thermal conduction would then result in less overall thermal deformation, as the manufactured component would expand less due to the decreased time in high temperatures.

This section will explain the full process taken to run the simulations and analyze the data. The process starts from the creation of the CAD for the manufactured components, followed by the design and CAD creation of the support structures. The components and the support structures are then merged, and imported into the additive manufacturing software to simulate the results of manufacture. The results from the manufacturing simulation are then analyzed by means of graphs and statistical methods. Figure shows the process performed in this study.

make figure

Process diagram goes here

.
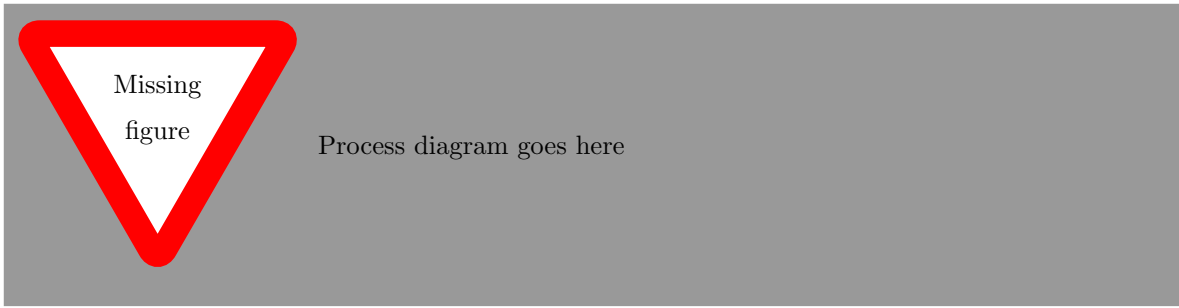
The following sections explain in detail each stage of this process.

5 Component CAD creation

5.1 Simple geometry

The components with simple geometries utilized in this study consist of a cube, three triangular components with different slopes, and three cylindrical components with different values of curvature. To reiterate, these components have the same dimensions that were used in the study of lattice support structure performance by Peishu . All of the CAD models used for the simple geometry study were created using FreeCAD, an open-source CAD software. All of the components were expoerted as .STEP files, and then they were merged with their corresponding support structures using the software nTop. The following section gives detail on the dimensions of the simple geometries, while a later section will explain the process of merging with the support structure.

reference peihsu's thesis here

5.1.1 Cubes

The first component analyzed was a simple cube, with side length of 30 mm. When imported into Simufact Additive, the cube was placed above the base plate at a distance of 10 mm. The volume between the bottom surface of the cube and the base plate was used as the design space for the support structure using topology optimization.

Figure of cube component
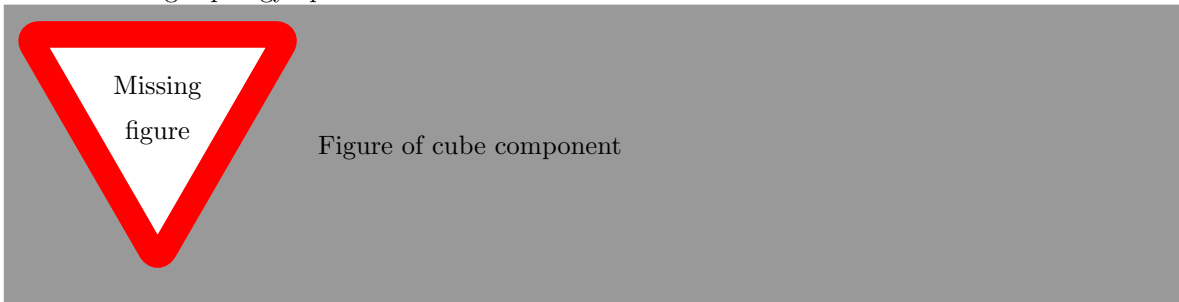
5.1.2 Triangles

Three triangles with different slopes were used in this study. All triangular components used in this study consist of a base of 30 x 30 cm^2 with varying slopes and heights. The slopes used were slopes of 15°, 30°, and 45°. Figures of the triangular components are shown in below.

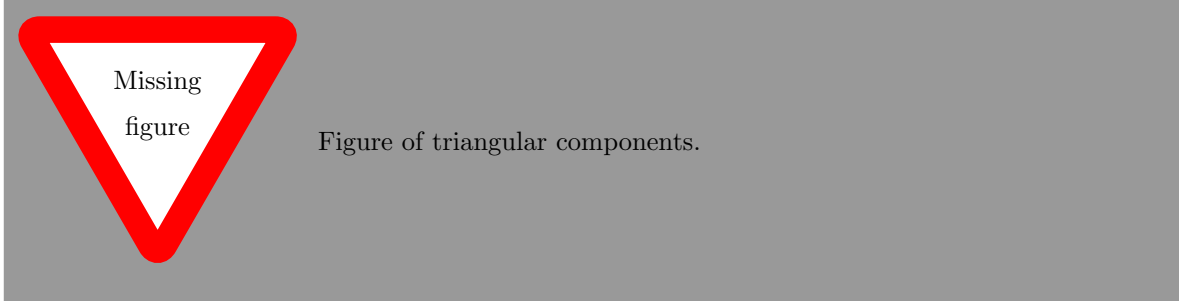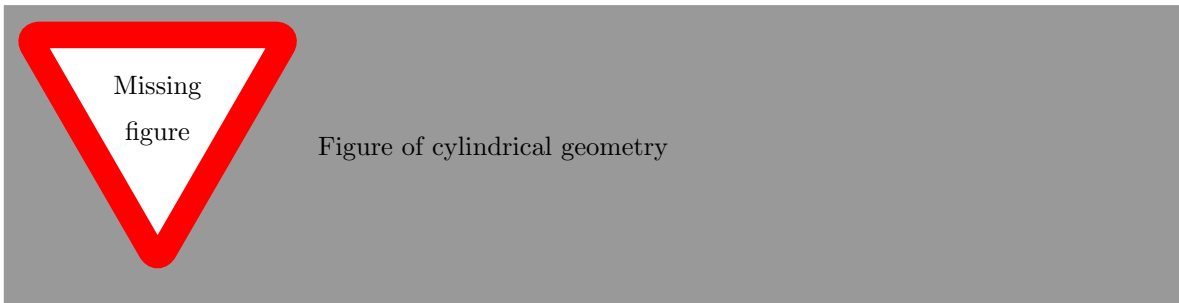Figure of triangular components.

5.1.3 Cylinders

5.2 Femoral component

Figure of cylindrical geometry

6 Support structure creation

The supporting structures of the components were created using the method of topology optimization. The design was implemented using the topology optimization module of COMSOL Multiphysics . To create a topology optimization model, a suitable mathematical model with certain constraints needs to be applied to a determied design volume. The following section will explain how all of these factors were determined.
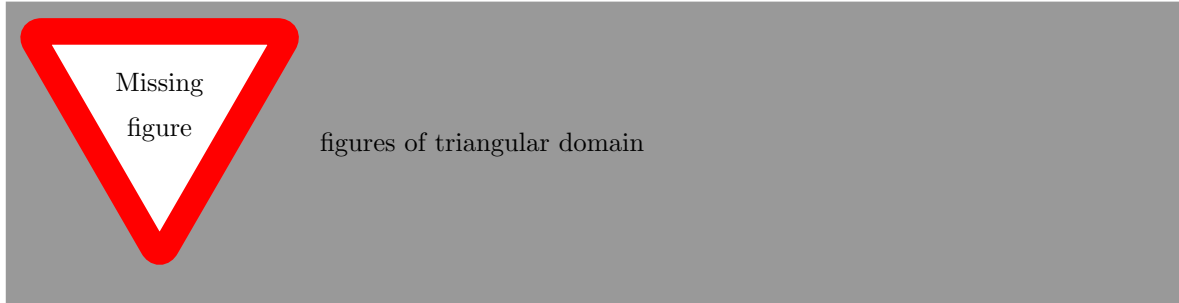
6.1 Design domain

6.1.1 Simple geometry design domain

The design domain for the simple geometry components consists of the volume between the bottom face of each component and the base plate. For the cube, the design domain ends up being a rectangular prism with dimensions 10 cm x 30 cm x 30 cm. For the triangles, the design domain consists of different triangular spaces with a square base, shown in figures

Missing figure

figures of triangular domain

. .

Since all of these components can be generated by the drawing their profile on a plane and extruding it in a direction perpendicular to the plane, the design domain utilized in the topology optimization model is also a 2D model. This grants the benefit of faster computation, and thus the supporting structure is created by first finding the planar topology and also extruding it in a perpendicular direction.

> Add here the cylindrical component geometry

6.1.2 Femoral component design domain

6.2 Mathematical model

The mathematical models consists of the governing equations used to describe the physics of the system and the constraints imposed on the model, as well as the objective function that needs to be minimized.

For this system, the most appropriate objective function would be the maximization of thermal conductivity; in order to minimize the thermal deformation of the manufactured component, it is imperative to transfer heat away from it as fast as possible. The physical equation describing the thermal conduction of a material is given by Fourier's Law, which can be expressed as:

$$q = -k\nabla T \tag{1}$$

where q is the heat conduction through the material, k is the material's thermal conductivity and ∇T is the thermal gradient.

An additional objective function to be considered would be the deformation of the supporting structure as well. If the supporting structure is composed of very thin segments, there is a high possiblity that the structure might buckle, which would add significant geometric errors to the component. In the

> Write down equation of thermal conductivity for top optimiation domain here.

worst case scenario, the structure itself would collapse, causing the entire manufacturing process to fail. In order to avoid this, it is necessary to limit the amount of deformation that is allowed in the support structure. This can be achieved by utilizing an aditional objective function of structural compliance minimization. We define structural compliance as the amount of energy stored in the deformation of material. Minimizing this stored energy is thus equivalent to minimizing the deformation. Therefore, the second objective function of minimization of structural compliance is also used in the topology optimization model.as heat passes into the support structure from the bottom of the manufactured component,

The next step is applying certain constriants on the system. For this study, we are mostly concerned with the principal constrain is the volume fraction, which is the maximum amount of volume that the topology can cover within the design domain. This criteria is chosen because we seek to use less material for the supporting structure, as long as we can maintain the total deformation of the manufacturing componont beneath a threshold. For the model in COMSOL, the values of volume fraction = 0.5 and volume fraction = 0.75 were used.

6.3 COMSOL implementation

6.3.1 Mesh

6.3.2 Physical parameters

6.3.3 Simulation itself

As discussed in the previous chapter, Helmholtz filters are frequently used in topology optimization studies to avoid chattering designs.

7 Component and support structure merging

7.1 CAD for support structure

This section talks about how FreeCAD was used to create the support structure once the pictures of the topolgies have been obtained.

7.2 Merging of part with support structure

Once the CAD file of the component and the support structure has been built, it is necessary to merge them together and import them into Simufact to undergo simulation of the manufacturing process. The software used for blending the component and its support structure is nTop . nTop's interface makes it very easy to merge the part, and also allows to blend the support structure and the component,

which effectively creates a fillet between the nodes of both components to allow for a smooth transition between bodies. Of course, blending the component and the support structure in this manner would not give any benefit in a real manufacturing process, as the structure and the component would not be able to be separated easily. NEvertheless, this blend radius is beneficial for the simulation since it was observed that a direct union and import of the support structure + component in Simufact resulted in having very small gaps between the two pieces, resulting in a non manifold geometry that would cause the finite element model to have gaps between some of its nodes.

Missing figure

add figure of error / warning from Simufact due to import of structure with gaps. Two figures should suffice here.
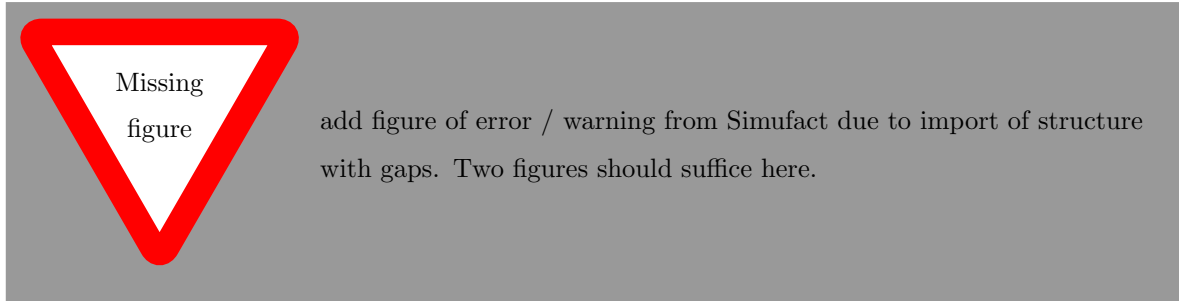
8   Simulation of manufacturing process

The software utilized to simulate the manufacturing process is Simufact Additive version 2023.2. Simufact Additive is capable of simulation building process of additive manufacturing components, and coupling thermal and stress physics to predict the temperature values of the component throughout the building process and the total stresses, strains and deformations resulting from the manufacturing process.

In order to set up Simufact correctly, the building process and the building space geometry must be specified before each simulation. The building parameters and building geometries used in this study are the same that were used in the analysis of thermal deformation using lattice support structures done by Peihsy and al.

add reference here

8.1   Simufact simulation parameters and voxelization

After the component and the support structures were merged, they were imported into Simufact. It is during this step that all the factors related to the simulation are set, which include the machine properties, material properties, and build parameters. As mentioned previously, these were chosen to be identical to the study of PeiHsu to ensure that the results of this study could be compared to the results of that one.

add that thermo-mechanical process was used and explain what it is.

The first parameter to be chosen is the process properties, which determines the physics that Simufact takes into consideration to run the simulation. Simufact provides three different types of processes:

mechanical, thermal, and thermomechanical. As stated in the Simufact manual , mechanical provides a fast mechanical analysis that only uses inherent strains as the main input. This type of analysis does not take into consideration the temperature fields during the building process. The thermal process on the other hand only considers the thermal behaviour of the components, and the temperature field of the support structures, components and base can be analyzed. The thermomechanical process couples the stress and thermal analyses, and allows for the prediction of temperature, distortions and stresses of the part. This latter process is the one used in this study.

After choosing the process property, the machine parameters must be specified. This includes the machine build plate geometry and the laser parameters. The machine build plate chosen was a circular plate with an 80 mm radius. The build space dimensions consists of a space of 160 mm in all three x-y-z directions. As for the laser parameters, the simulations were carried out with one laser with a maximum laser power of 500 W and a maximum laser speed of 2000 mm / s, an efficiency of 25 percent, and a beam width of 25 mm. All of these parameters are summarized in the table

The building parameters for the process need also to be set. These include material layer parameters and any thermal parameters and temperature specifications for the build environment and base plate. The powder layer thickness was chosen to be 0.03 mm, with a recoater time of 10 s. The powder initial temperature was set to 25 °Celcius, with an initial base temperature of 200 degrees.

8.2 Convergence analysis

To make sure that the results of the simulation would not depend on the voxel density of the

9 Data collection and organization

This section will detail how I collected the data from Simufact and what software and methods I used to organize it an analyze it. The actual results will go in the following chapter, aptly named results, duh

Todo list

[margin notes]

insert reference to manual here

add the table of building parameters here.

explain why base plate temeprature might be used in practice, might want to add reference to 10.3390/thermo4

Need to add exposure time, exposure energy fraction, and volumetric expansion factors here. Need to refer to Comsol documentation to explain