

Morban's thesis

Marco Orban

Chapter 1

Introduction

1.1 Nihao

1.1.1 Background

Osteoarthritis is a very common type of arthritis that causes pain, swelling and stiffness in various body parts such as the hands, hips, back and knees. Over time, it affects bones, cartilage and other tissues, and is common in adults over the age of 45. As percentage of elderly people in developed countries around the world increases, the prevention and treatment of diseases like osteoarthritis become more important. In particular, Taiwan has already exceeded the threshold (14%) of the definition of aged society established by the United Nations, with 3.983 million citizens over the age of 65, accounting for 17.18% of the population [1]. Total knee arthroplasty (TKA), also called total knee replacement (TKR) is a very effective and consistently successful surgery that provides good outcomes for patients suffering from end-stage knee osteoarthritis, and serves to alleviate symptoms by totally replacing the damaged knee joint with prosthetic components. This results in greatly improved pain relief and better quality of life for patients [2].

Taiwan's National Health Insurance has spent 5% of its total expenditure on TKR every year, and its incidence tripled between 1996 and 2010, making it an important

public health issue. according to [3], and

There has been a growing interest of using additive manufacturing (AM) for the manufacture of prosthetics used in TKA, since additive manufacturing is a technology well suited for the creation of custom, lightweight components with complex geometries, while also reducing material waste and keeping the weight of components light. [4]. Even though additive manufacturing offers many advantages for the production of structures tailored to each individual patient, one of the major obstacles that stands in the way of a more widespread adoption are the high costs of AM. One way to reduce the cost of the total procedure is by reducing the amount of material used by minimizing the amount of scrap from the fabricated parts, which results from the support structures that the manufacturing process required as well as the addition or reduction of material to meet tolerances after machining [4] [5] .

Additionally, the deviation between the native bone and the implant is crucial for postoperative comfort of the patient, as a deviation of just 1mm can cause an increased rate of wear between joints, which can result in postoperative infection, pain and instability [6] [7].

Chapter 2

Literature Review

2.1 Additive manufacturing

Additive manufacturing is a manufacturing process that ta

2.2 Support structures

2.3 Topology Optimization

Topology optimization is an optimization technique that seeks to find the optimal shape within a volume that satisfies certain governing equations, while at the same time satisfying specific constraints. This technique is usually utilized for the design of structures with no preconceived shape. When topology optimization is used for the purpose of designing structures, the optimal shape resulting from the analysis can be interpreted as a material distribution within the specified volume, which is called the design domain. A classical application of topology optimization is the binary compliance problem, in which regions of solid and void materials are distributed in order to minimize the work done by external forces (this is called compliance), also subject to a volume constraint [liu_efficient_2014](#). The problem of topology optimization can be expressed mathe-

matically as follows **lazarov_filters_2011**

$$\min : c(\rho) = f^T u \text{ s.t. : } K(\rho)u = fV = \sum_i \rho_i v_i \quad (2.1)$$

In the above formulation, the design domain

This binary compliance problem suffers from a serious drawback; the problem is ill-posed and the solution will converge to a material distribution in the shape of a checkerboard pattern, with infinitesimal holes. To alleviate this, several restrictions must be made and the equations used to generate the structure must be modified.

Talk here about density-based approach and SIMP

Talk here about the filters, density filters and Helmholtz filters

Techniques such as perimeter control methods [] density gradient control and mesh-independent density filters could be used to solve the problem of a chattering design [reference goes here, filter in topology optimization. A filtering approach implements an algorithm that iterates over all the points in the design domain, and uses weighted values of its surroundings to determine the final density value of the point in question, effectively computing the weighted average of a point and its surroundings.

Talk here about hyperbolic tangent and what it does to the filter

Here, the full equation of topology optimization using all of the above should be shown.

2.3.1 Research Purpose

This is something here

2.3.2 Research originality and contribution

Chapter 3

Methodology

3.1 Introduction

To analyze the performance of different support structures created using topology optimization, a comparison study was made in which parts created by additive manufacturing were paired with different support structures. This study assumed that different structures will conduct heat energy differently, and thus some topologies might be more effective in removing heat faster from each material layer as it is being processed. This increased thermal conduction would then result in less overall thermal deformation, as the manufactured component would expand less due to the decreased time in high temperatures.

This section will explain the full process taken to run the simulations and analyze the data. An overview of the process can be seen in Figure 3.1. The process starts from the creation of the CAD for the manufactured components, followed by the design and CAD creation of the support structures. The components and the support structures are then merged, and imported into the additive manufacturing software to simulate the results of manufacture. The results from the manufacturing simulation are then analyzed by means of graphs and statistical methods.

The subsequent sections explain in detail each stage of this process.

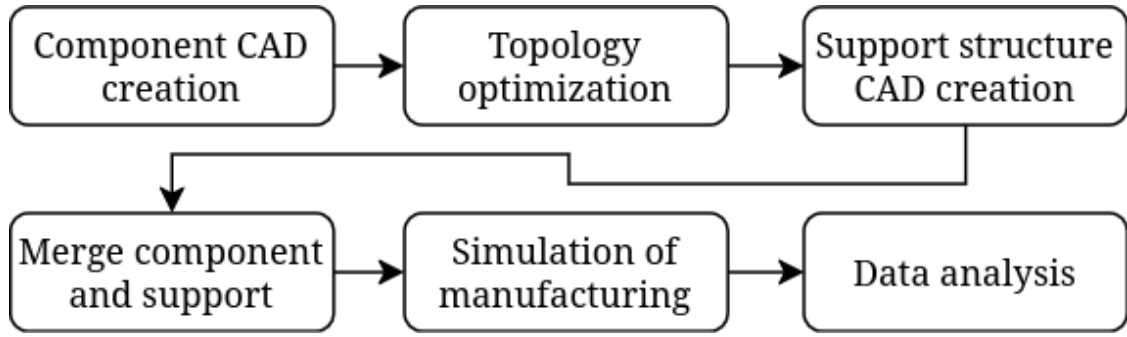


Figure 3.1: Process diagram.

3.2 Component CAD creation

3.2.1 Simple geometry

The components with simple geometries utilized in this study consist of a cube, three triangular components with different slopes, and three cylindrical components with different values of curvature. To reiterate, these components have the same dimensions that were used in the study of lattice support structure performance by Peishu **peishu_thesis**. All the CAD models used for the simple geometry study were created using FreeCAD, an open-source CAD software. All the components were exported as .STEP files, and then they were merged with their corresponding support structures using the software nTop.

- A cube with side length of 30 mm (Figure 3.2).
- Three triangular components with varying slopes. All triangular components have a base of $30 \times 30 \text{ mm}^2$, with slopes of 15° , 30° and 45° . The measurements are shown in figure.


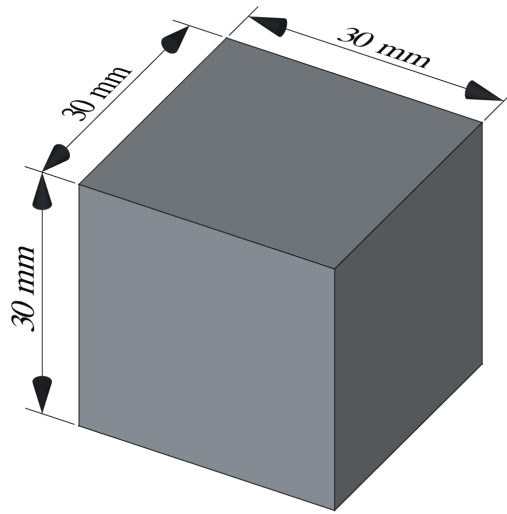


Figure 3.2: Dimensions of cube component.

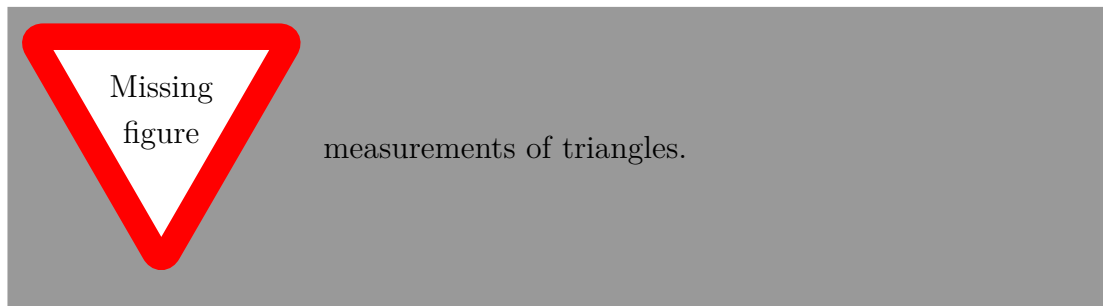


•

Add cylinders here

3.2.2 Femoral component

Add figure of cylinders

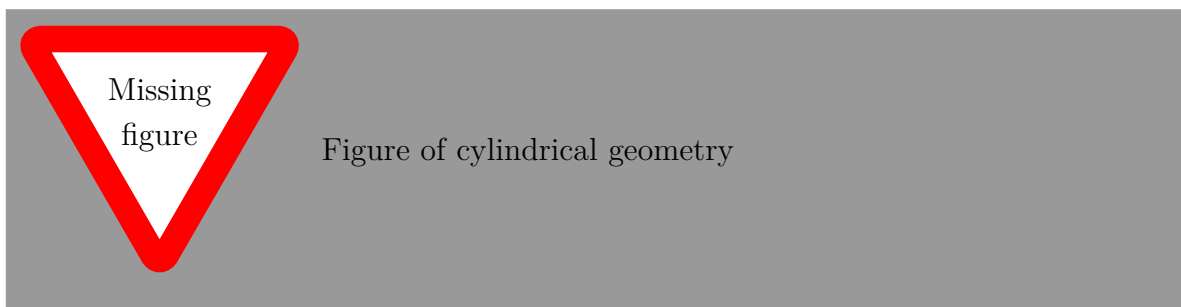

3.3 Support structure creation


The supporting structures of the components were created using the method of topology optimization. The design was implemented using the topology optimization module of COMSOL Multiphysics 6.2.

The steps for creating a valid topology optimization model are: determine the design volume, choose a suitable mathematical model for the behavior of the material within the design volume, choose the objective functions and decide what constraints need to the material within the volume be applied to the design volume. The following section explains all of these steps in detail.

3.3.1 Design domain

Simple geometry design domain

The design domain for the simple geometry components consists of the volume between the bottom face of each component and the base plate. For the cube, the design domain ends up being a rectangular prism with dimensions 10 cm x 30 cm x 30 cm. For the triangles, the design domain consists of different triangular spaces with a square base, shown in figures

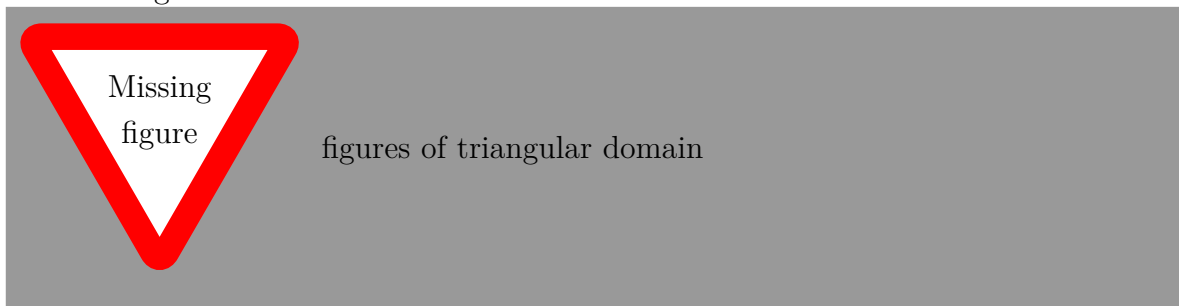

Since all of these components can be generated by the drawing their profile on a plane and extruding it in a direction perpendicular to the plane, the design domain utilized in the topology optimization model is also a 2D model. This grants the benefit

need to
expand
on this
and make
it better.
need to get
dimesions
of compo-
nents

Add here
the cylin-
drical com-
ponent ge-
ometry

of faster computation, and thus the supporting structure is created by first finding the planar topology and also extruding it in a perpendicular direction.

Femoral component design domain

3.3.2 Mathematical model

The mathematical models consists of the governing equations used to describe the physics of the system and the constraints imposed on the model, as well as the objective function that needs to be minimized.

For this system, the most appropriate objective function would be the maximization of thermal conductivity; in order to minimize the thermal deformation of the manufactured component, it is imperative to transfer heat away from it as fast as possible. The physical equation describing the thermal conduction of a material is given by Fourier's Law, which can be expressed as:

$$q = -k\nabla T \quad (3.1)$$

where q is the heat conduction through the material, k is the material's thermal conductivity and ∇T is the thermal gradient.

For this study, the only constraint applied on the system was the volume fraction. Volume fraction specifies the maximum amount of volume that the designed topology should take from the design domain. The volume fractions utilized were 50% and 75%.

3.3.3 Objective functions

An additional objective function to be considered would be the deformation of the supporting structure as well. If the supporting structure is composed of very thin segments, there is a high possibility that the structure might buckle, which would add significant geometric errors to the component. In the worst case scenario, the structure itself would collapse, causing the entire manufacturing process to fail. In order to

Write down equation of thermal conductivity for topology optimization domain here.

avoid this, it is necessary to limit the amount of deformation that is allowed in the support structure. This can be achieved by utilizing an additional objective function of structural compliance minimization. We define structural compliance as the amount of energy stored in the deformation of material. Minimizing this stored energy is thus equivalent to minimizing the deformation. Therefore, the second objective function of minimization of structural compliance is also used in the topology optimization model.as heat passes into the support structure from the bottom of the manufactured component,

probably
want to
add a refer-
ence to this
somewhere.

The next step is applying certain constraints on the system. For this study, we are mostly concerned with the principal constraint is the volume fraction, which is the maximum amount of volume that the topology can cover within the design domain. This criteria is chosen because we seek to use less material for the supporting structure, as long as we can maintain the total deformation of the manufacturing component beneath a threshold. For the model in COMSOL, the values of volume fraction = 0.5 and volume fraction = 0.75 were used.

Write equa-
tion of
compliance
here

3.3.4 COMSOL implementation

Mesh

Physical parameters

Simulation itself

Merge them
together
to get the
final objec-
tive func-
tion. Ex-
plain about
the weights.

As discussed in the previous chapter, Helmholtz filters are frequently used in topology optimization studies to avoid chattering designs.

Talk about
Helmholtz
filter

3.4 Component and support structure merging

3.4.1 CAD for support structure

Hyperbolic
tangent

This section talks about how FreeCAD was used to create the support structure once the pictures of the topologies have been obtained.

3.4.2 Merging of part with support structure

Once the CAD file of the component and the support structure has been built, it is necessary to merge them together and import them into Simufact to undergo simulation of the manufacturing process. The software used for blending the component and its support structure is nTop . nTop's interface makes it very easy to merge the part, and also allows to blend the support structure and the component, which effectively creates a fillet between the nodes of both components to allow for a smooth transition between bodies. Of course, blending the component and the support structure in this manner would not give any benefit in a real manufacturing process, as the structure and the component would not be able to be separated easily. NEvertheless, this blend radius is beneficial for the simulation since it was observed that a direct union and import of the support structure + component in Simufact resulted in having very small gaps between the two pieces, resulting in a non manifold geometry that would cause the finite element model to have gaps between some of its nodes.

add version
here



add figure of error / warning from Simufact due to import of structure with gaps. Two figures should suffice here.

3.5 Simulation of manufacturing process

The software utilized to simulate the manufacturing process is Simufact Additive version 2023.2. Simufact Additive is capable of simulation building process of additive manufacturing components, and coupling thermal and stress physics to predict the temperature values of the component throughout the building process and the total stresses, strains and deformations resulting from the manufacturing process.

In order to set up Simufact correctly, the building process and the building space

geometry must be specified before each simulation. The building parameters and building geometries used in this study are the same that were used in the analysis of thermal deformation using lattice support structures done by Peihsy and al.

add reference here

3.5.1 Simufact simulation parameters and voxelization

After the component and the support structures were merged, they were imported into Simufact. It is during this step that all the factors related to the simulation are set, which include the machine properties, material properties, and build parameters. As mentioned previously, these were chosen to be identical to the study of PeiHsu to ensure that the results of this study could be compared to the results of that one.

add that thermo-mechanical process was used and explain what it is.

The first parameter to be chosen is the process properties, which determines the physics that Simufact takes into consideration to run the simulation. Simufact provides three different types of processes: mechanical, thermal, and thermomechanical. As stated in the Simufact manual , mechanical provides a fast mechanical analysis that only uses inherent strains as the main input. This type of analysis does not take into consideration the temperature fields during the building process. The thermal process on the other hand only considers the thermal behaviour of the components, and the temperature field of the support structures, components and base can be analyzed. The thermomechanical process couples the stress and thermal analyses, and allows for the prediction of temperature, distortions and stresses of the part. This latter process is the one used in this study.

insert reference to manual here

After choosing the process property, the machine parameters must be specified. This includes the machine build plate geometry and the laser parameters. The machine build plate chosen was a circular plate with an 80 mm radius. The build space dimensions consists of a space of 160 mm in all three x-y-z directions. As for the laser parameters, the simulations were carried out with one laser with a maximum laser power of 500 W and a maximum laser speed of 2000 mm / s, an efficiency of 25 percent, and a beam width of 25 mm. All of these parameters are summarized in the table

add the table of building parameters here.

The building parameters for the process need also to be set. These include material layer parameters and any thermal parameters and temperature specifications for the build environment and base plate. The powder layer thickness was chosen to be 0.03 mm, with a recoater time of 10 s. The powder initial temperature was set to 25 °Celcius, with an initial base temperature of 200 degrees.

3.5.2 Convergence analysis

To make sure that the results of the simulation would not depend on the voxel density of the

3.6 Data collection and organization

This section will detail how I collected the data from Simufact and what software and methods I used to organize it an analyze it. The actual results will go in the following chapter, aptly named results, duh

explain why
base plate
temepra-
ture might
be used in
practice,
might want
to add
reference to
10.3390/therm

Need to
add expo-
sure time,
exposure
energy frac-
tion, and
volumet-
ric expan-
sion factors
here. Need
to refer to
Comsol
documenta-
tion to ex-
plain what
these are
and how
they influ-
ence the

Todo list

Figure: measurements of triangles.	6
Add cylinders here	7
Add figure of cylinders	7
Figure: Figure of cylindrical geometry	7
need to expand on this and make it better. need to get dimesions of components	8
Figure: figures of triangular domain	8
Add here the cylindrical component geometry	8
Write down equation of thermal conductivity for top optimiation domain here. .	9
probably want to add a reference to this somewhere.	10
Write equation of compliance here	10
Merge them together to get the final objective function. Explain about the weights.	10
Talk about Helmholtz filter	10
Hyperbolic tangent	10
add version here	11
Figure: add figure of error / warning from Simufact due to import of structure with gaps. Two figures should suffice here.	11
add reference here	12
add that thermomechanical process was used and explain what it is.	12
insert reference to manual here	12
add the table of building parameters here.	12

explain why base plate temeprature might be used in practice, might want to add reference to 10.3390/thermo4010005	13
Need to add exposure time, exposure energy fraction, and volumetric expansion factors here. Need to refer to Comsol documentation to explain what these are and how they influence the results.	13
Need to say that no calibration was done. Explain why calibration is necessary for the manufacture of parts, but also explain the reason no calibration was done here.	13
Explain what this is and how it is done, and what the purpose of this is.	13

This is a citation **lazarov_filters_2011**

References

- [1] “Elderly and disadvantaged situation, trend and strategy analysis of living environment in Taiwan,” Architecture and Building Research Institute, Ministry of the Interior, ROC (Taiwan), Accessed: Feb. 11, 2025. [Online]. Available: http://www.abri.gov.tw/en/News_Content.aspx?n=908&s=317737&sms=9518.
- [2] M. A. Varacallo, T. D. Luo, A. Mabrouk, and N. A. Johanson, “Total Knee Arthroplasty Techniques,” in *StatPearls*, Treasure Island (FL): StatPearls Publishing, 2025. pmid: 29763071. Accessed: Feb. 11, 2025. [Online]. Available: <http://www.ncbi.nlm.nih.gov/books/NBK499896/>.
- [3] F.-H. Lin et al., “The increase in total knee replacement surgery in Taiwan,” *Medicine*, vol. 97, no. 31, e11749, Aug. 3, 2018, ISSN: 0025-7974. DOI: 10.1097/MD.00000000000011749. pmid: 30075592. Accessed: Feb. 11, 2025. [Online]. Available: <https://www.ncbi.nlm.nih.gov/pmc/articles/PMC6081077/>.
- [4] S. P. Narra, P. N. Mittwede, S. DeVincent Wolf, and K. L. Urish, “Additive Manufacturing in Total Joint Arthroplasty,” *The Orthopedic clinics of North America*, vol. 50, no. 1, pp. 13–20, Jan. 2019, ISSN: 0030-5898. DOI: 10.1016/j.ocl.2018.08.009. pmid: 30477702. Accessed: Feb. 11, 2025. [Online]. Available: <https://www.ncbi.nlm.nih.gov/pmc/articles/PMC6555404/>.
- [5] “Metal Additive Manufacturing: Cost Competitive Beyond Low Volumes | J. Manuf. Sci. Eng. | ASME Digital Collection,” Accessed: Feb. 11, 2025. [Online]. Available: <https://asmedigitalcollection.asme.org/manufacturingscience/>

article/139/8/081010/376354/Metal-Additive-Manufacturing-Cost-Competitive.

- [6] Chung, Pei-Hsu, “應用模擬分析與實驗設計法探討晶格支撐結構以最小化選擇性雷射熔融之熱變形 = Study on the Lattice Support Structures to Minimize Thermal Distortion in Selective Laser Melting Using Simulation and Design of Experiments,” 國立中興大學, 臺中市, 2024.
- [7] M. Kebbach et al., “Computer-based analysis of different component positions and insert thicknesses on tibio-femoral and patello-femoral joint dynamics after cruciate-retaining total knee replacement,” *The Knee*, vol. 40, pp. 152–165, Jan. 1, 2023, ISSN: 0968-0160, 1873-5800. DOI: 10.1016/j.knee.2022.11.010. PMID: 36436384. Accessed: Feb. 11, 2025. [Online]. Available: [https://www.thekneejournal.com/article/S0968-0160\(22\)00181-8/fulltext](https://www.thekneejournal.com/article/S0968-0160(22)00181-8/fulltext).