

# Lumina II



## High Power Output

With 210 large wafer technology and slicing technology, multi-grid technology, high-density module packaging to ensure higher power output of modules



## High Reliability

Excellent harsh tests results and advanced half-cell tech improve product reliability for long-term life cycle



## Extra power generation

N-type wafers and cells bring ultralow LID&LeTID degradation, less than 1% 1<sup>st</sup> year degradation guaranteed, in addition lower temperature coefficient and better weak-light response provide extra power generation



## High ROI

Bifacial power generation reduces BOS and system LCOE dramatically, promoting the project ROI

**SolarSpace Technology Co., Ltd.** was established in 2011, as a world leading solar cell and module manufacturer, concentrating on high efficient solar-technology production with 58.75GW capacity of solar cell and 5.7GW capacity of solar module in China and overseas.

\*Please refer to SolarSpace for details

## SS9-66HD

## 695-715N


N-TOPCon Bifacial Dual Glass Module

# 715W

Maximum  
Power Output

# 23.02%

Maximum  
Module Efficiency

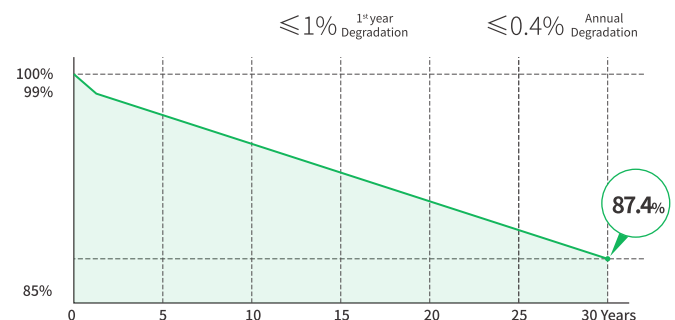

**15**Years Product Warranty **30**Years Linear Power Warranty

### Comprehensive Certificates

- IEC61215 •IEC61730
- IEC61701:Salt mist corrosion test •IEC62716:Ammonia corrosion test
- IEC60068:Dust and Sand test
- ISO9001:2015: Quality Management System
- ISO14001:2015: Environment Management System
- ISO45001:2018: Occupational Health and Safety Management Systems



Electric Characteristics(STC)

| Module Type                     | SS9-66HD<br>-695N | SS9-66HD<br>-700N | SS9-66HD<br>-705N | SS9-66HD<br>-710N | SS9-66HD<br>-715N |
|---------------------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| Maximum Power (Pmax) [W]        | 695               | 700               | 705               | 710               | 715               |
| Open-Circuit Voltage (Voc)[V]   | 48.00             | 48.20             | 48.40             | 48.60             | 48.80             |
| Maximum Power Voltage (Vmp) [V] | 40.30             | 40.50             | 40.70             | 40.90             | 41.10             |
| Short-Circuit Current (Isc)[A]  | 18.28             | 18.32             | 18.36             | 18.40             | 18.44             |
| Maximum Power Current (Imp) [A] | 17.25             | 17.29             | 17.33             | 17.36             | 17.40             |
| Module Efficiency               | 22.37%            | 22.53%            | 22.70%            | 22.86%            | 23.02%            |


Irradiation 1000W/m<sup>2</sup>, Cell Temperature 25°C, AM=1.5

Electric Characteristics (NMOT)

| Module Type                     | SS9-66HD<br>-695N | SS9-66HD<br>-700N | SS9-66HD<br>-705N | SS9-66HD<br>-710N | SS9-66HD<br>-715N |
|---------------------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| Maximum Power (Pmax) [W]        | 530               | 534               | 538               | 542               | 546               |
| Open-Circuit Voltage (Voc)[V]   | 45.50             | 45.70             | 45.90             | 46.10             | 46.30             |
| Maximum Power Voltage (Vmp) [V] | 37.60             | 37.80             | 38.00             | 38.20             | 38.40             |
| Short-Circuit Current (Isc)[A]  | 14.76             | 14.80             | 14.84             | 14.88             | 14.92             |
| Maximum Power Current (Imp) [A] | 14.10             | 14.13             | 14.16             | 14.19             | 14.22             |

Irradiance 800 W/m<sup>2</sup>, Ambient Temperature 20 °C, Wind Speed 1 m/s, AM=1.5

Engineering Design

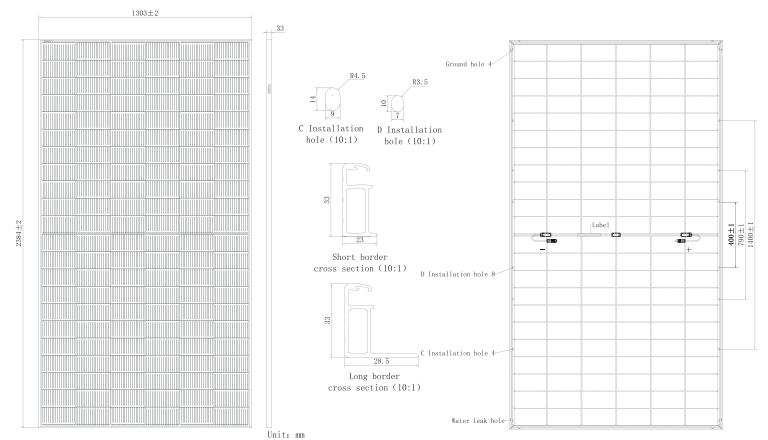

Bifacial Output-Rearside Power Gain (695W)

| Power Gain                      | 5%    | 10%   | 15%   | 20%   | 25%   |
|---------------------------------|-------|-------|-------|-------|-------|
| Maximum Power (Pmax) [W]        | 730   | 765   | 799   | 834   | 869   |
| Open-Circuit Voltage (Voc)[V]   | 48.00 | 48.00 | 48.00 | 48.10 | 48.10 |
| Maximum Power Voltage (Vmp) [V] | 40.30 | 40.30 | 40.30 | 40.40 | 40.40 |
| Short-Circuit Current (Isc)[A]  | 18.84 | 19.56 | 20.25 | 20.98 | 21.69 |
| Maximum Power Current (Imp) [A] | 18.12 | 18.99 | 19.83 | 20.65 | 21.51 |


Temperature coefficients

|                                 |            |
|---------------------------------|------------|
| Temperature coefficient of Isc  | +0.045%/°C |
| Temperature coefficient of Voc  | -0.260%/°C |
| Temperature coefficient of Pmax | -0.290%/°C |
| NMOT                            | 45±2°C     |

Mechanical Characteristics

|                 |                                                                                               |
|-----------------|-----------------------------------------------------------------------------------------------|
| Cell Type       | N-TOPCon                                                                                      |
| Number of Cells | 132(6x22)                                                                                     |
| Dimensions      | 2384X1303X33mm                                                                                |
| Weight          | 37.5kg                                                                                        |
| Glass           | Front glass, 2.0mm coated semi-tempered glass<br>Back Glass, 2.0mm glazed semi-tempered glass |
| Frame           | Anodized Aluminum Alloy                                                                       |
| Output Cables   | 4mm <sup>2</sup> (IEC),12AWG(UL)<br>300mm(including connector) or Customized Length           |
| Junction Box    | IP68 Rated, 3 diodes                                                                          |
| Connector       | MC4-EVO2 or MC4 Compatible                                                                    |
| Packaging       | 33 Pieces/Pallet, 594 pieces/40' container                                                    |

Characteristics

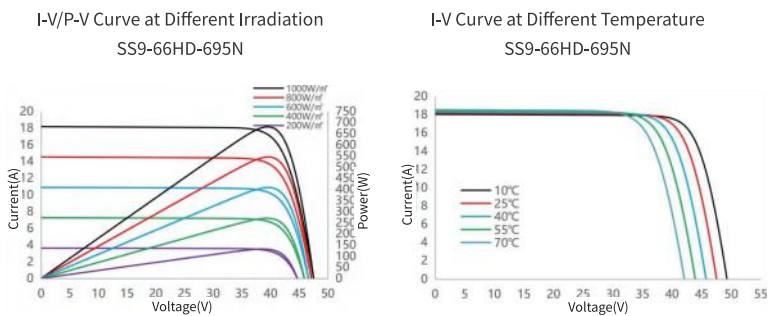

Operating Conditions

|                            |                |
|----------------------------|----------------|
| Maximum System Voltage     | 1500V DC (IEC) |
| Power Tolerance            | 0~+3%          |
| Operating Temperature      | -40°C~+85°C    |
| Maximum Series Fuse Rating | 30A            |
| Mechanical Load Front Rear | 5400Pa         |
| Mechanical Load Back Rear  | 2400Pa         |
| Bifaciality                | 80±5%          |

