


Separate reception and authentication clocks — k=5

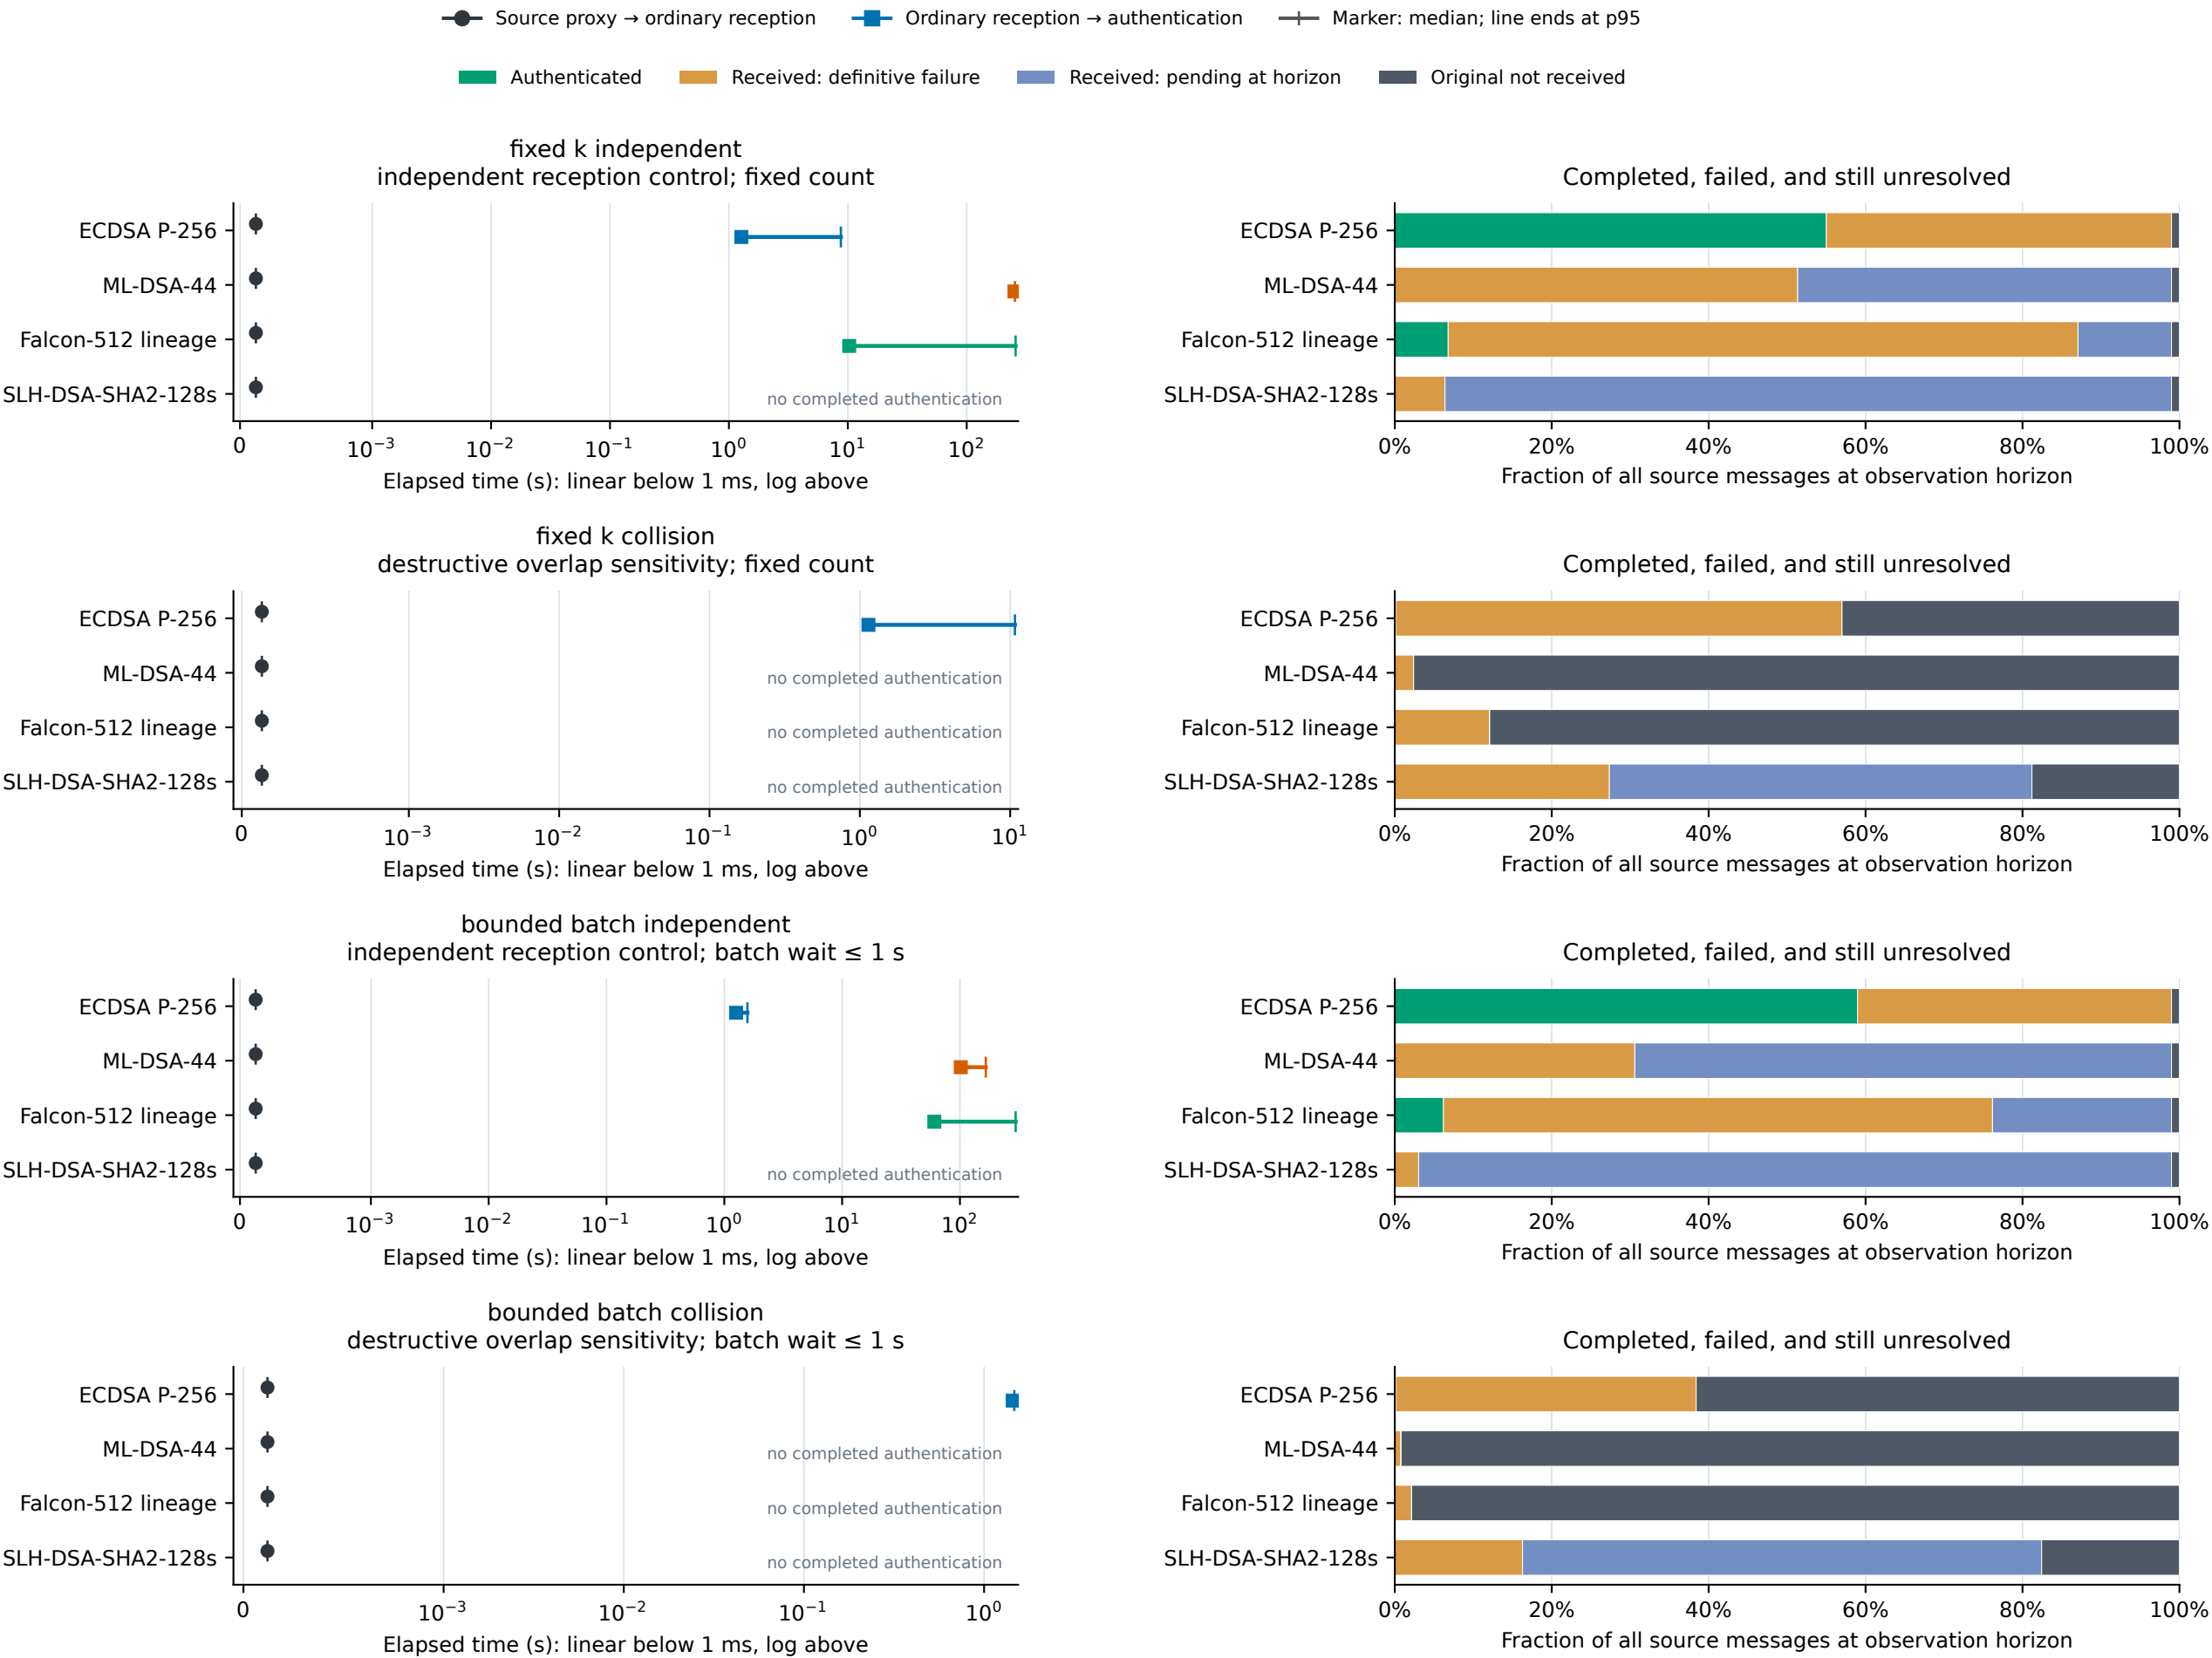

Delay percentiles condition on completed receptions/authentications; compare them with pending and lost fractions at right. Zero completions are not zero latency.

Across multiple seeds, plotted medians and p95 values are means of per-run percentiles, not pooled percentiles. Pending work is censored, not declared permanently failed.

Source timestamps proxy observed emissions; onboard measurement age is unavailable. Authentication does not delay ordinary transmission.

Follow-up after capture: 60 s; finite observation horizon, with no authentication-age expiry. One deterministic seed (1); no confidence intervals.

Destructive overlap is an uncalibrated sensitivity model: one collision domain, all overlaps erased, no power/capture effects.

Hardware profiles: sender embedded_reference; receiver embedded_reference. Composite embedded references mix platforms and include lineage proxies; no aircraft WCET claim.