
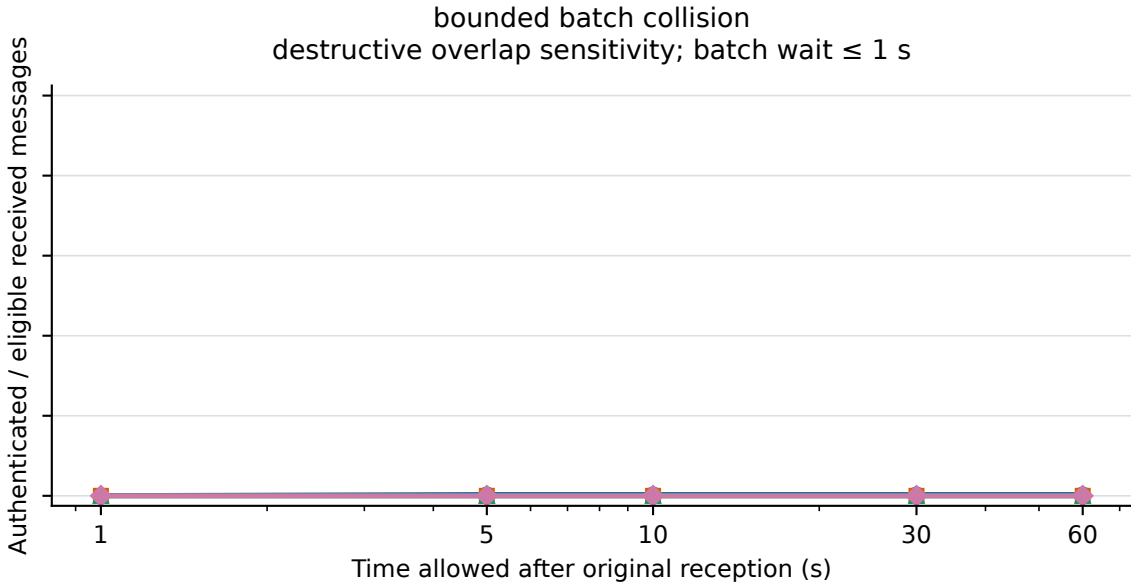
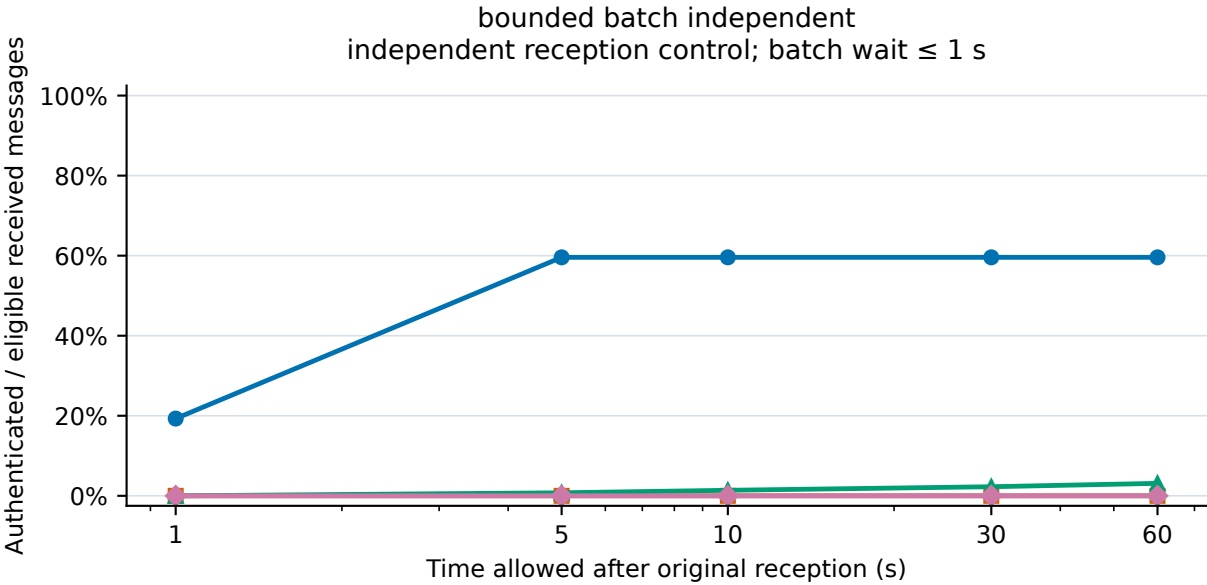


Authentication after ordinary reception — k=5

ECDSA P-256 ML-DSA-44 Falcon-512 lineage SLH-DSA-SHA2-128s

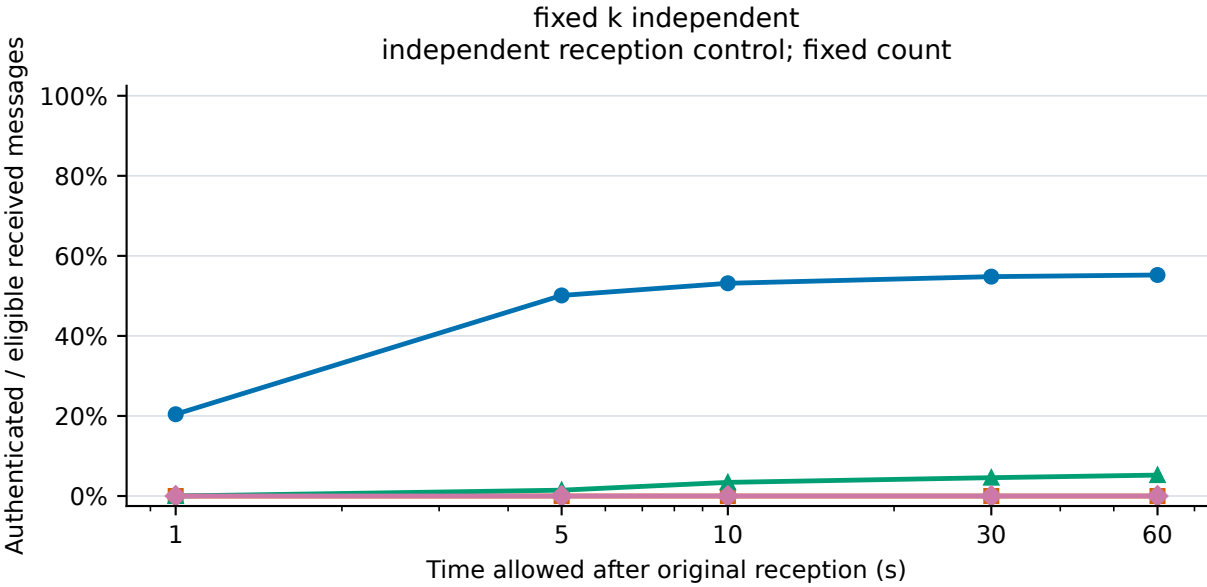

Each threshold uses its own fully observed reception-anchored cohort; messages without full follow-up are excluded from that denominator. Pending eligible messages miss that threshold but remain unresolved for eventual authentication. Curves are modeled verification-service completion. Follow-up after capture: 60 s; finite observation horizon, with no authentication-age expiry. One deterministic seed (1); no confidence intervals. Destructive overlap is an uncalibrated sensitivity model: one collision domain, all overlaps erased, no power/capture effects. Hardware profiles: sender embedded_reference; receiver embedded_reference. Composite embedded references mix platforms and include lineage proxies; no aircraft WCET claim.